



High Specific Charge and Long Cycle Life of Simple Li-S Batteries

Sigita Urbonaite and Petr Novák

Paul Scherrer Institute, Electrochemistry Laboratory, CH-5232 Villigen PSI, Switzerland
sigita.urbonaite@psi.ch, +41 56 310 5775

Carbon-sulphur electrodes based on simple physical mixing of carbon black (Super P) and elemental sulphur can yield performance values at least as good as those of most electrodes based on structured carbons and advanced preparation methods. Here we demonstrate the importance of often-neglected experimental parameters that influence the performance of Li-S batteries.

Electrolyte Amount and Binder

Electrode composition:

60% S, 30%C, 10% PEO* binder


Electrolyte:

1M* LiTFSI in DME:Diox (2:1)
With or without 0.5 M LiNO₃


*if not indicated otherwise

Cycling conditions:


1.8-2.7 V, C/5, where C=1675 mA/g_s

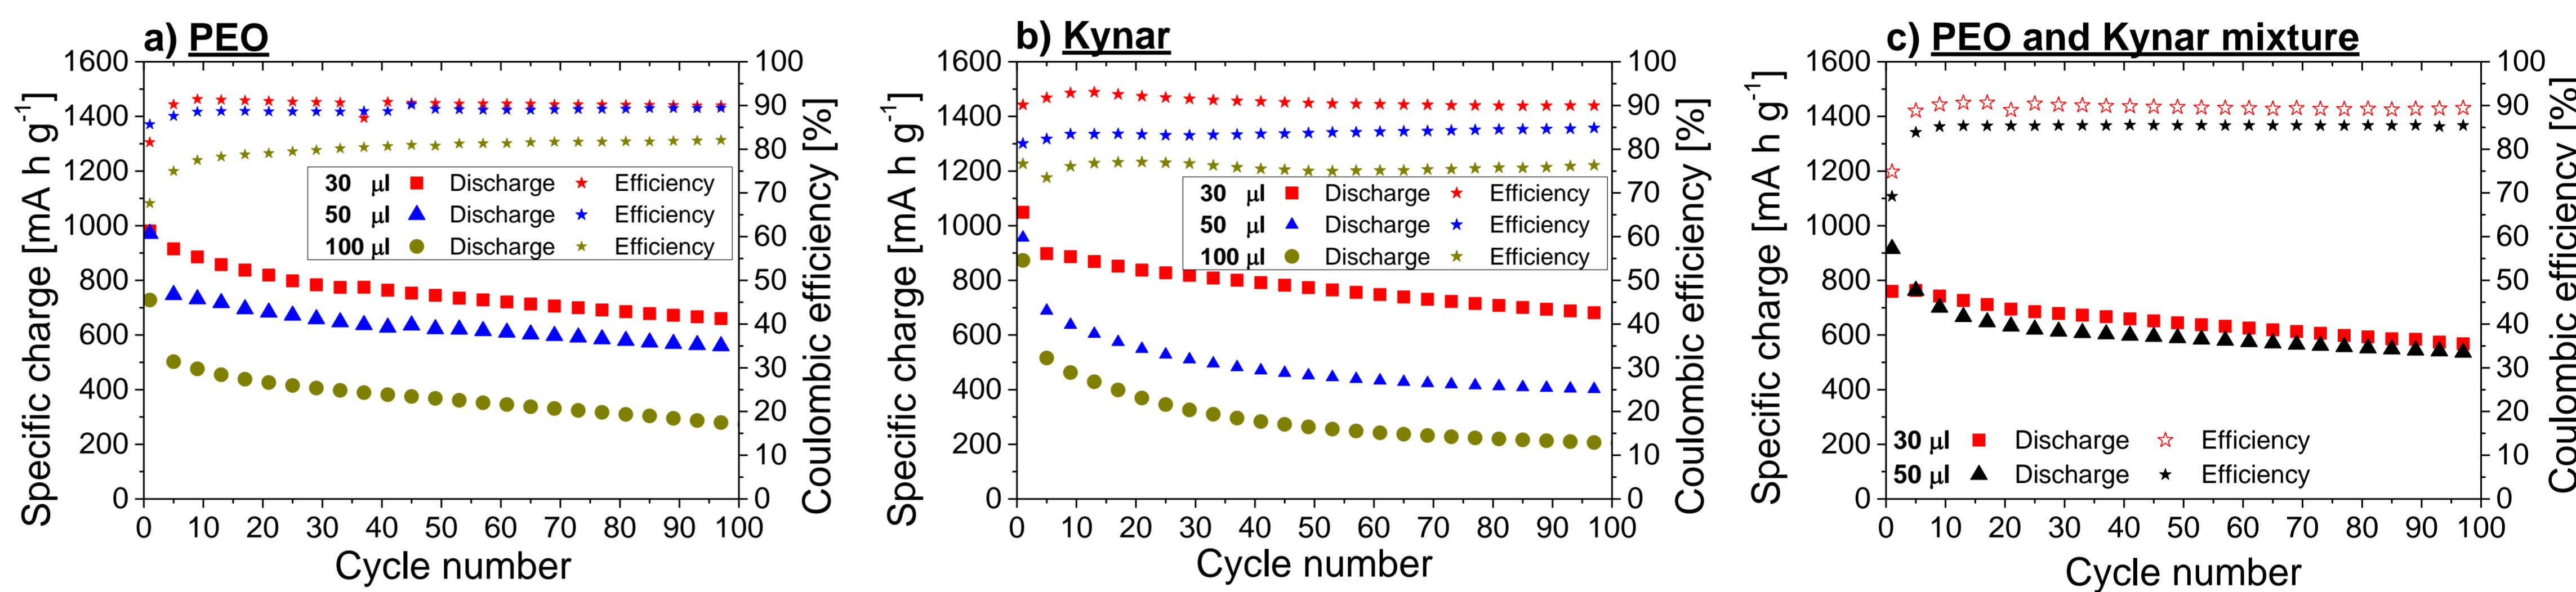


Electrolyte Salt Concentration

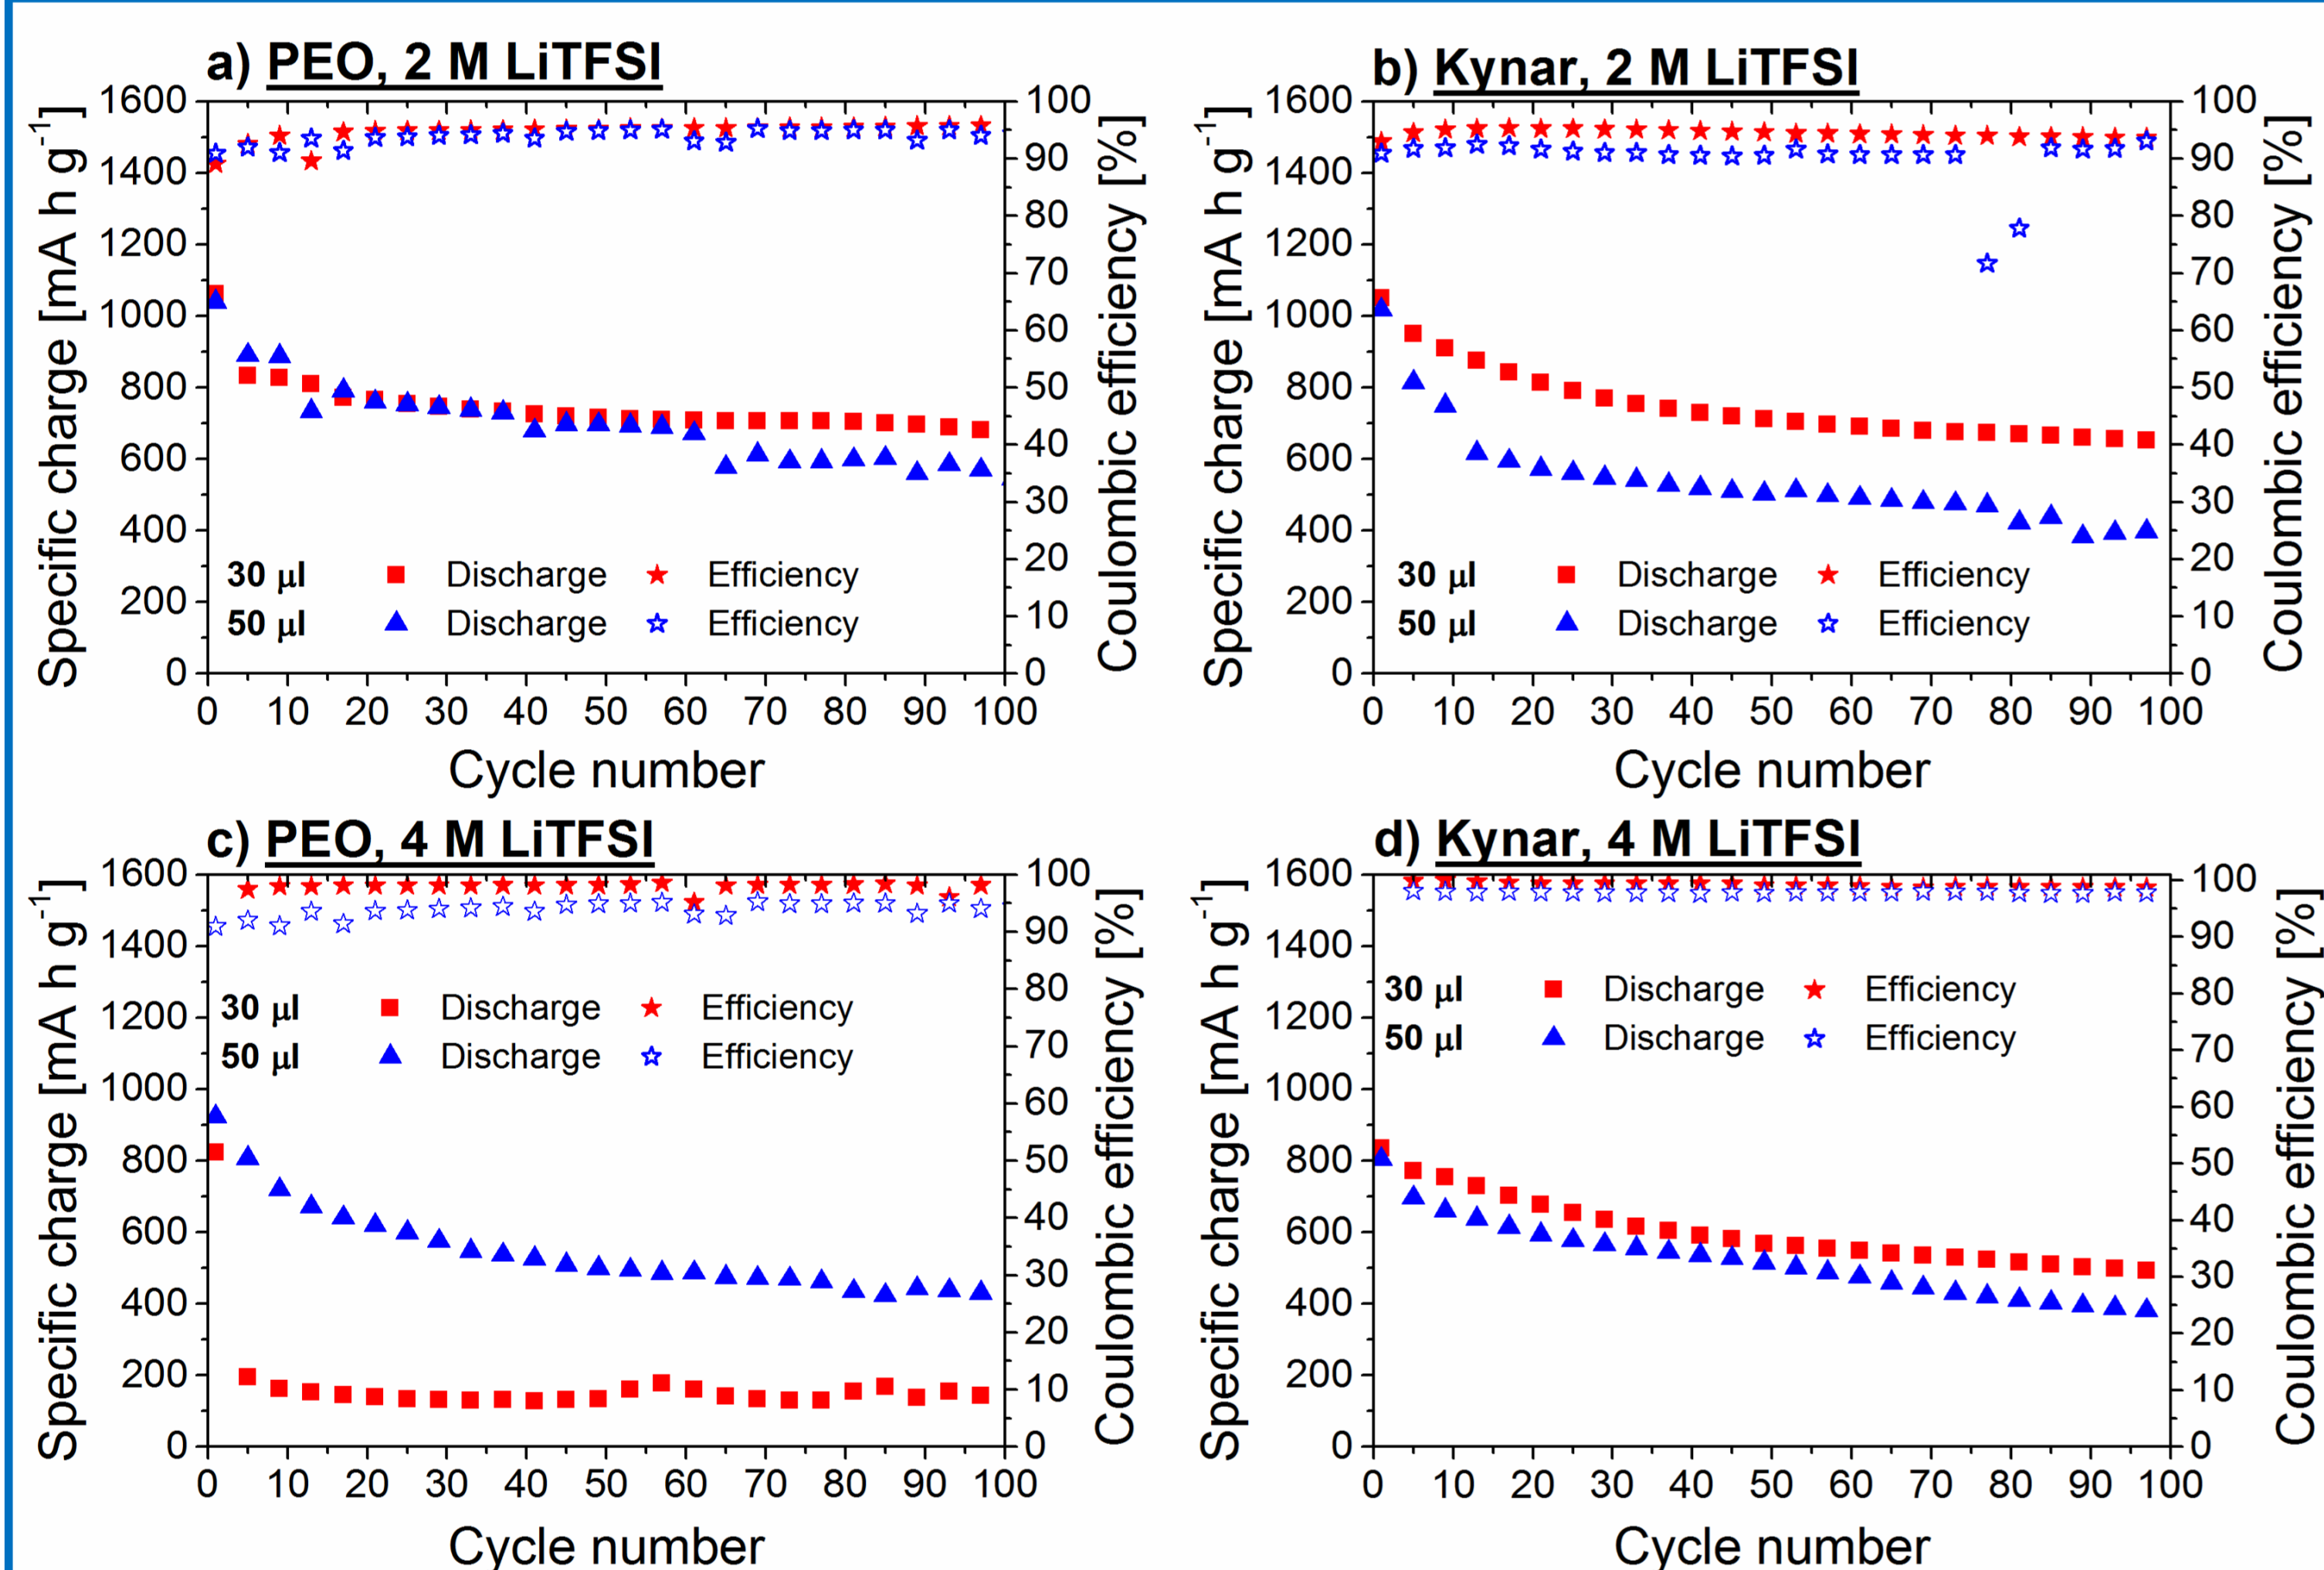


Electrolyte and Electrode Additives

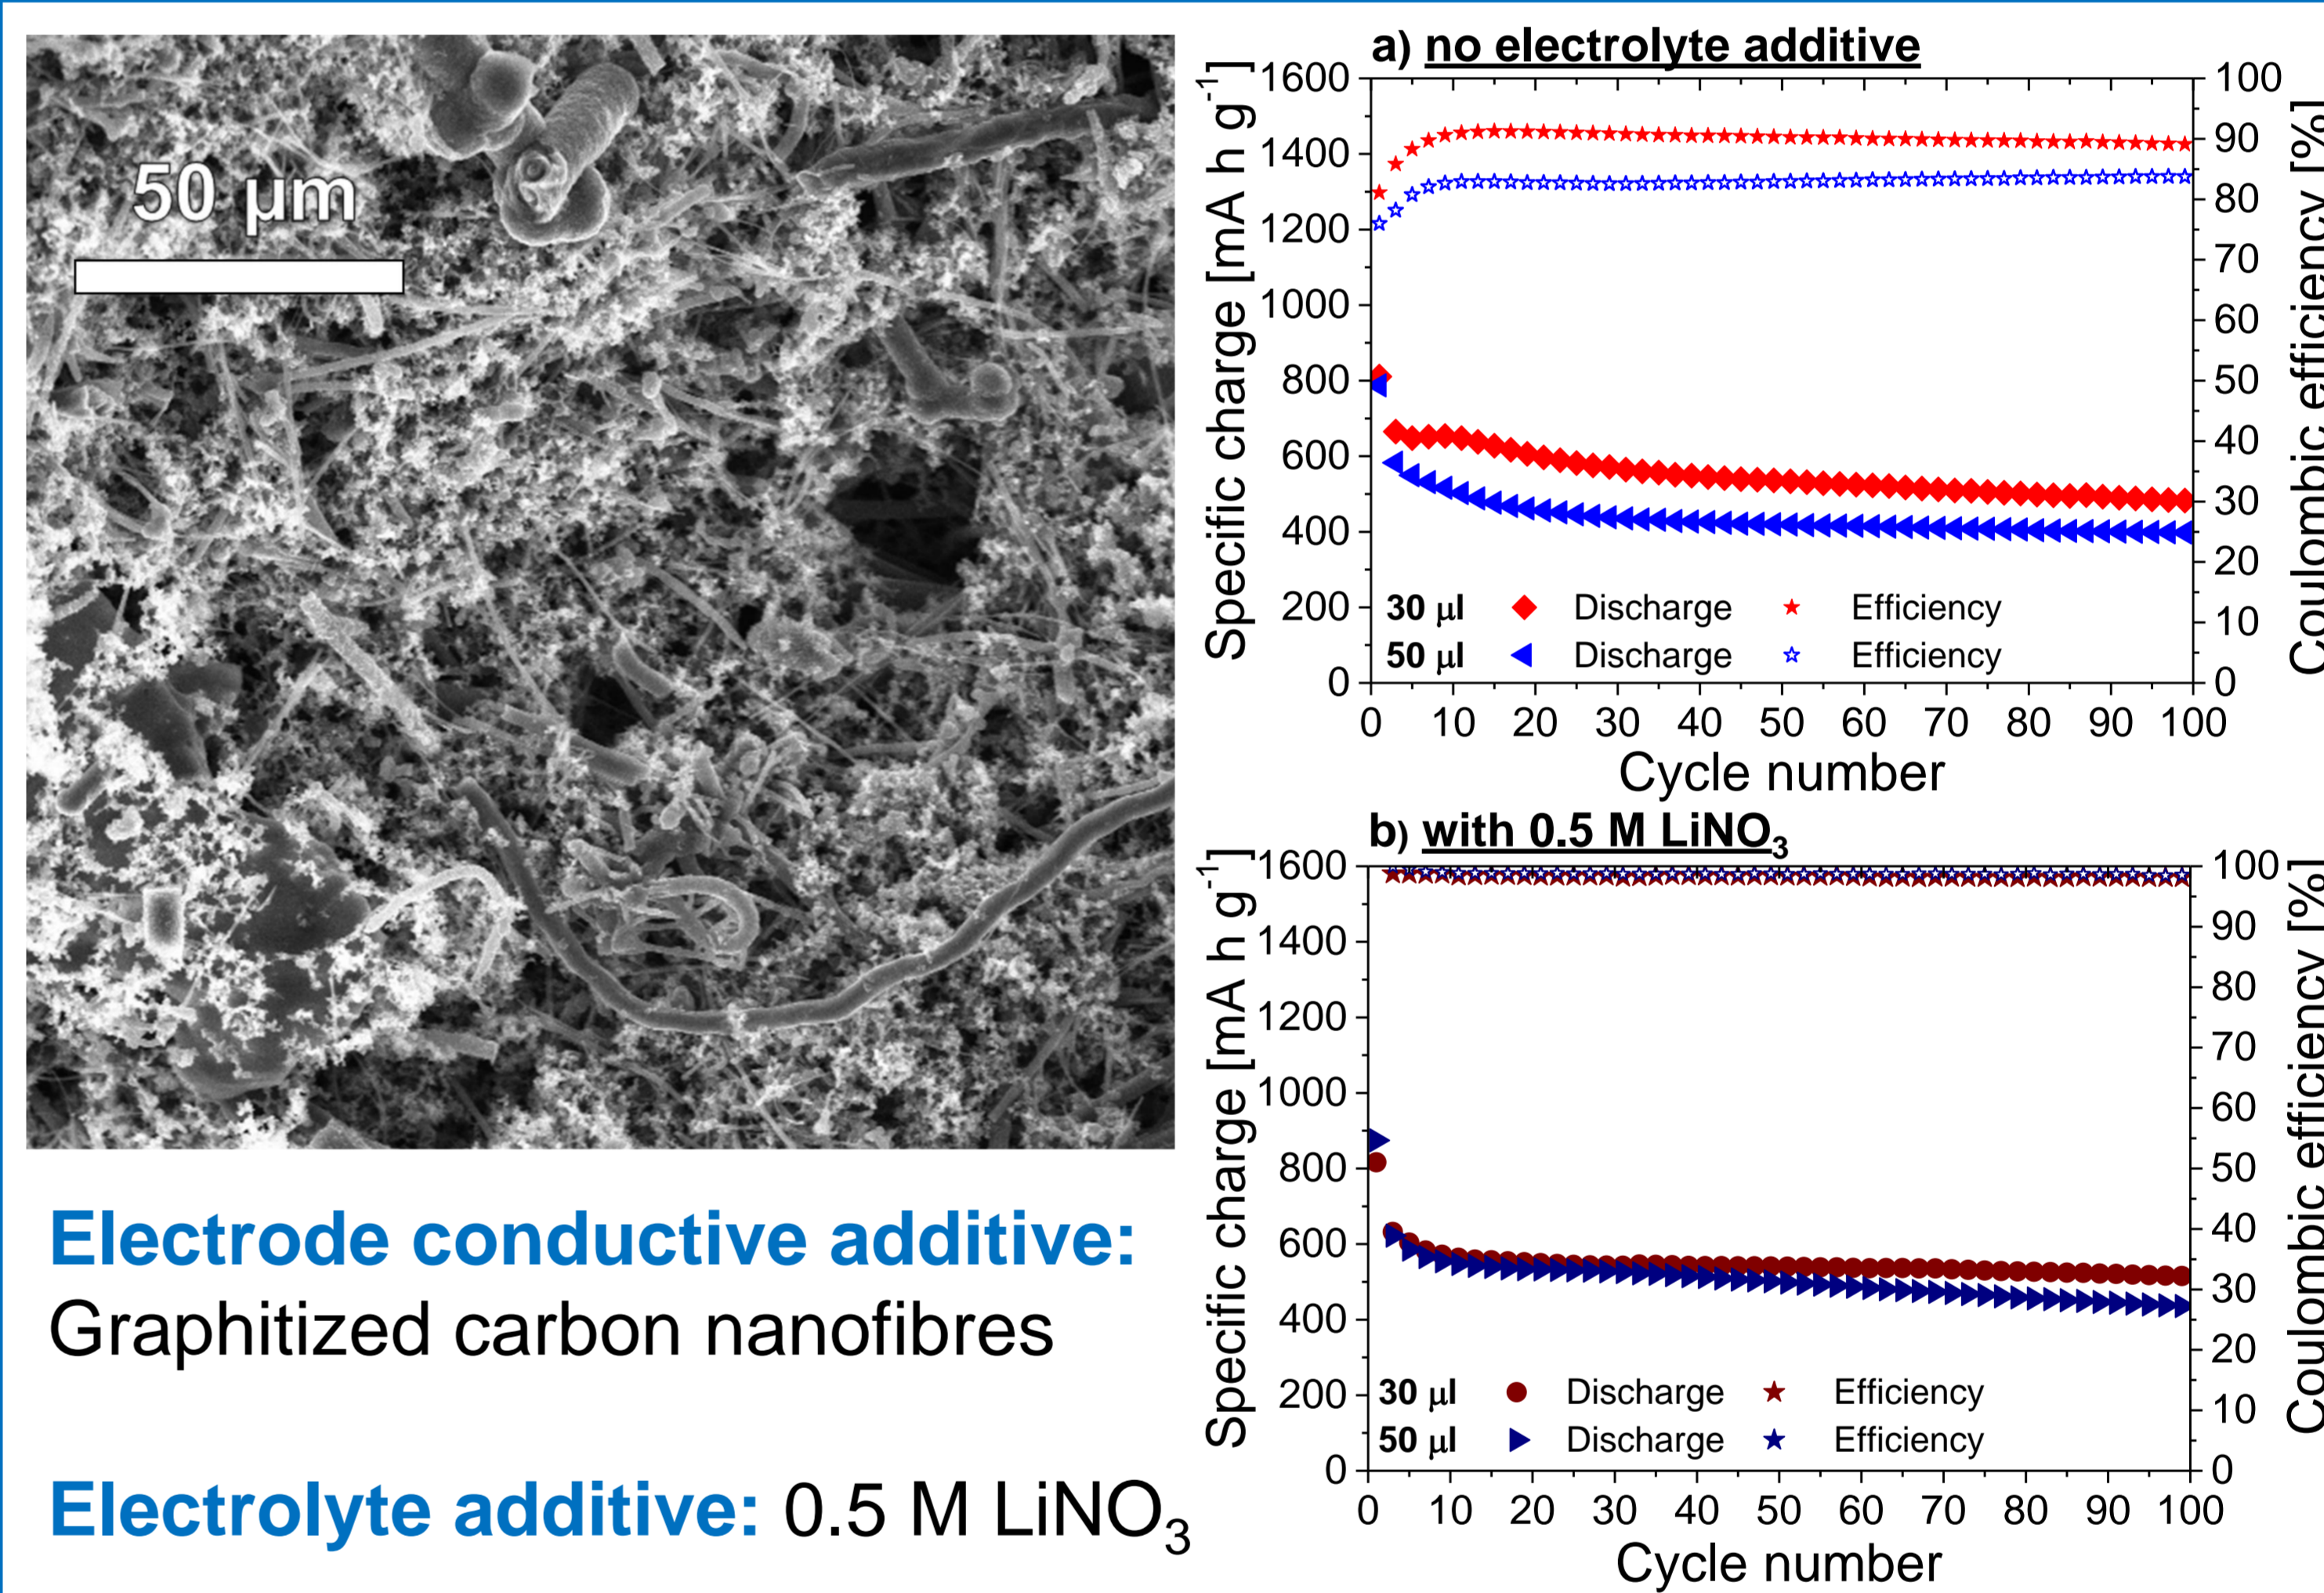

Sulphur Type

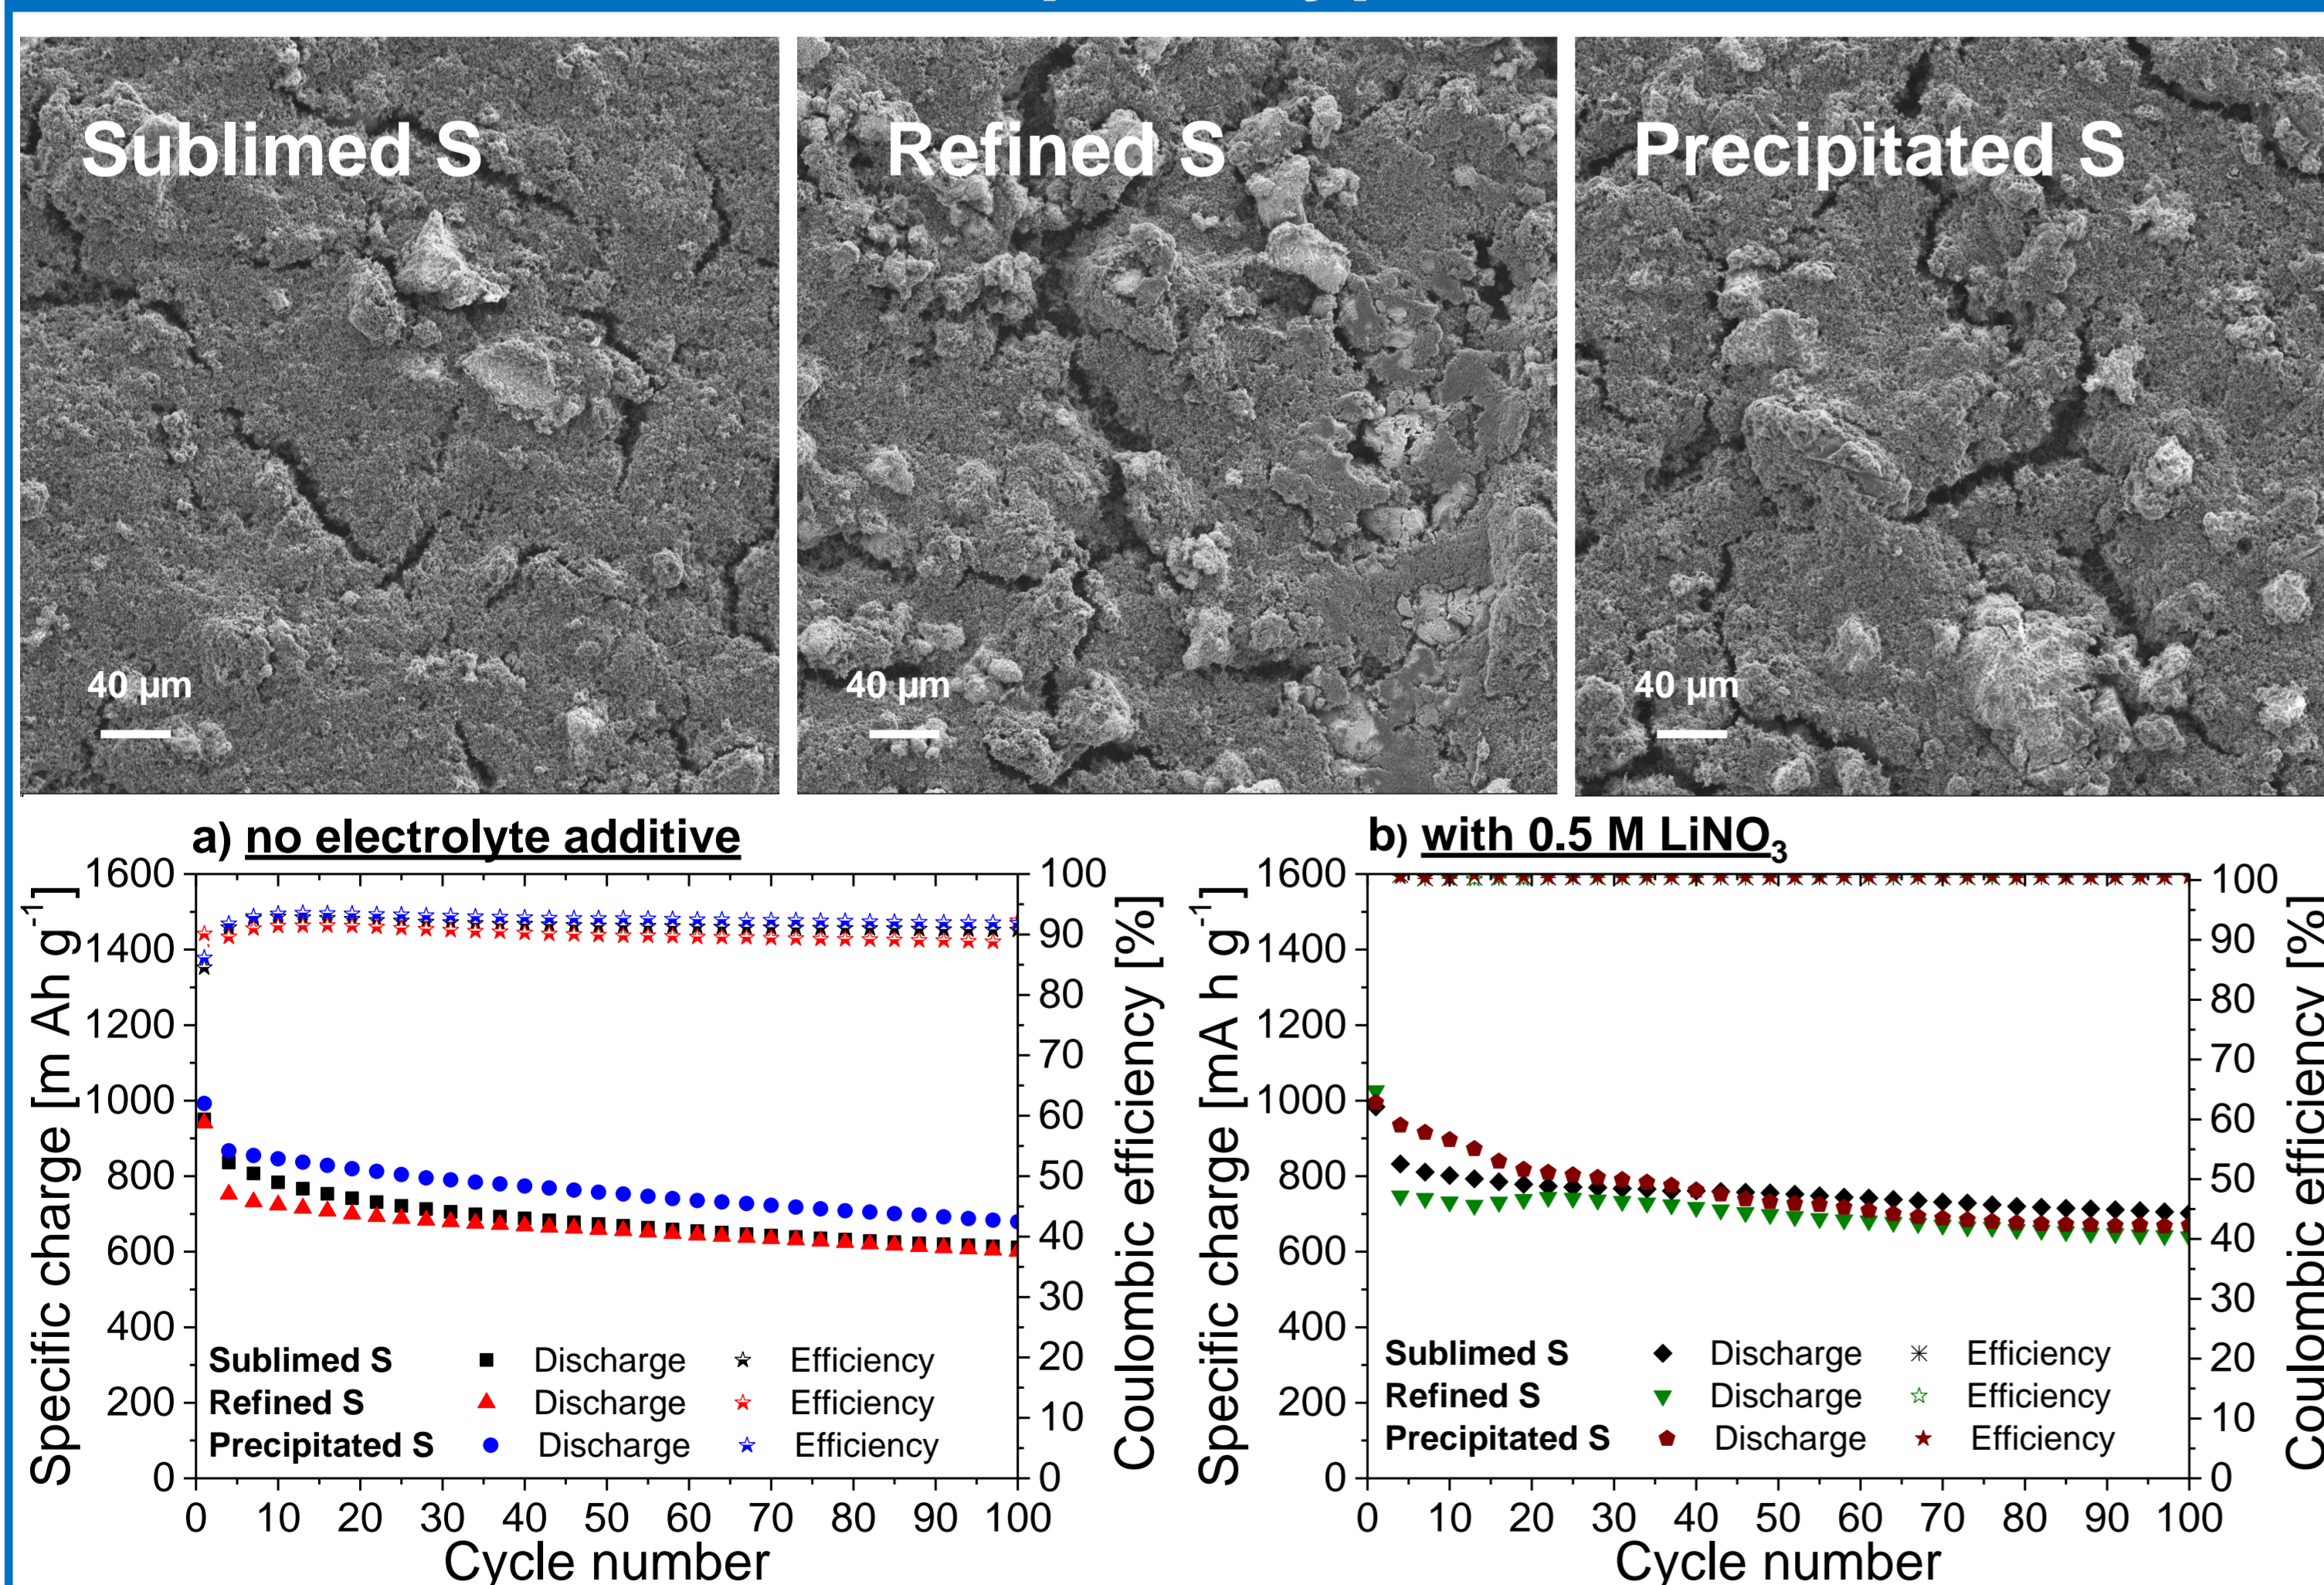

Long Term Cycling

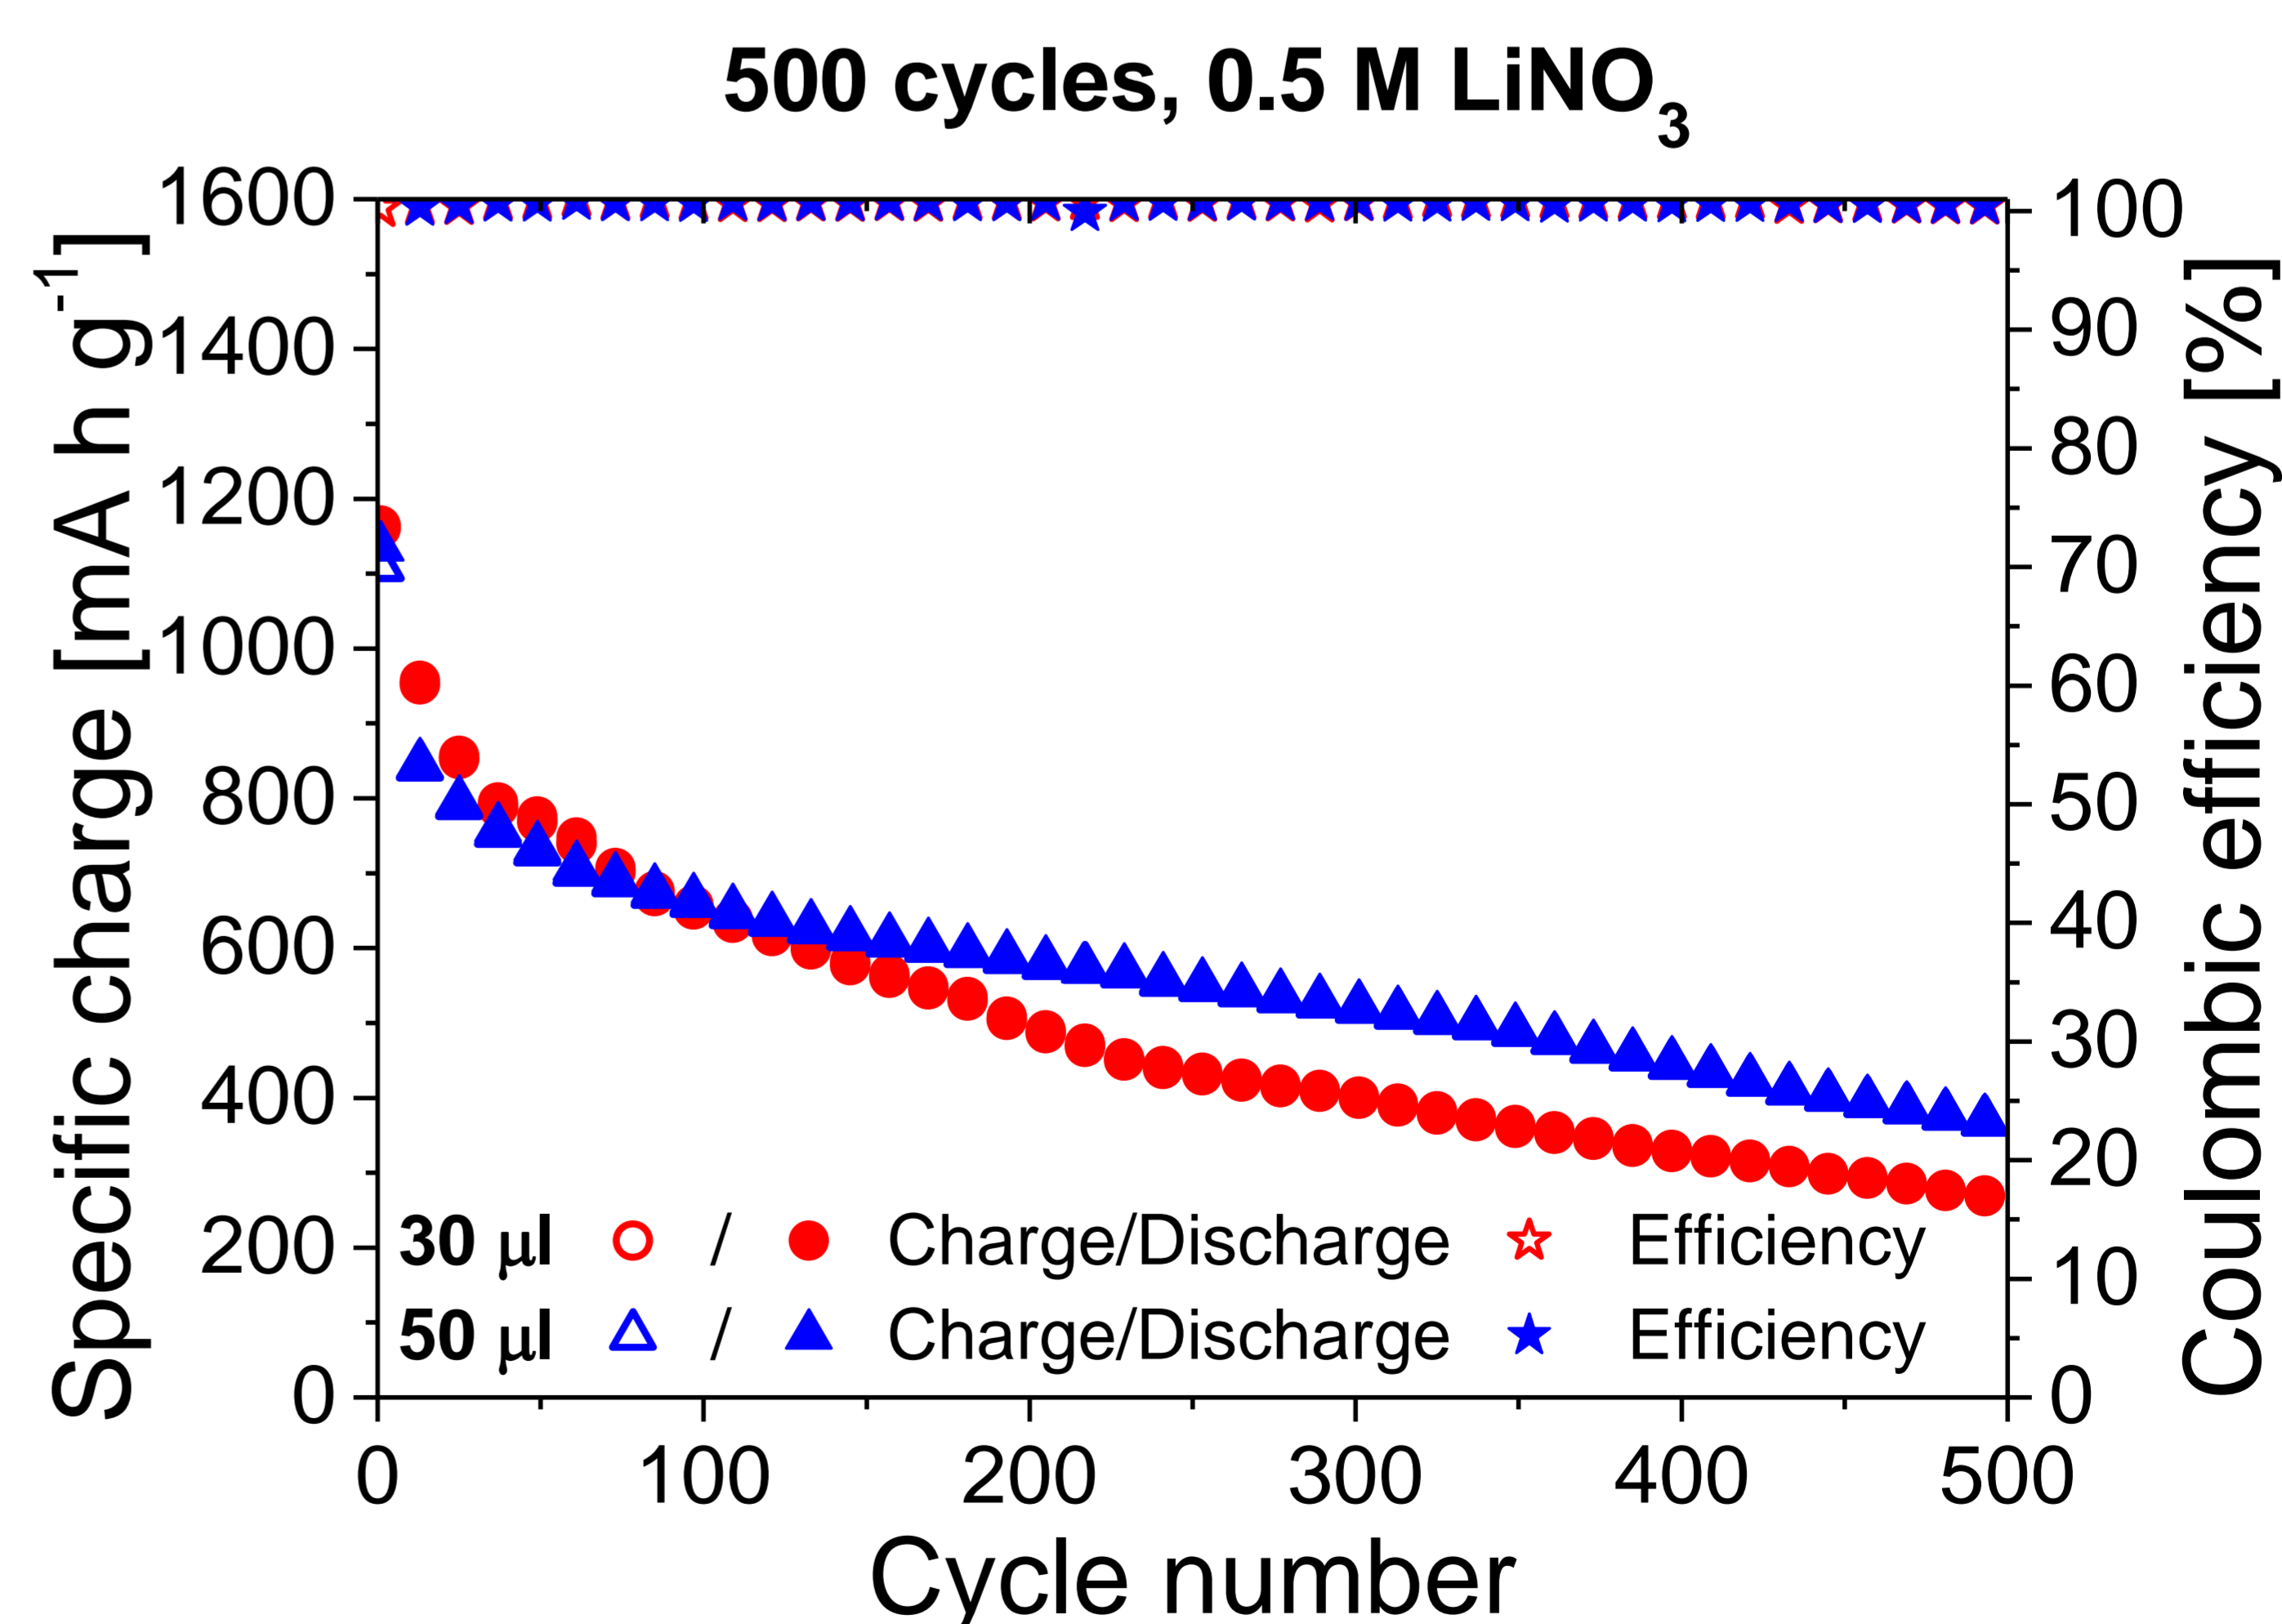

Concluding Remarks

The amount of electrolyte, the presence of electrolyte additives and the salt concentration are the most crucial and influential factors. Other parameters, which are previously claimed to have a high impact on performance among them sulphur particle-size, binder type and the presence of conductive additives to the electrode did not significantly influence the performance results of our Li-S cells.

Results suggest that parameters related to the electrolyte are more important for improving the overall performance than those concerning the electrode structure.

