

The Mu3e Experiment



Niklaus Berger


Institut für Kernphysik, Johannes-Gutenberg Universität Mainz



Particle Physics Seminar
Bonn November 2014




Overview



- The Motivation:

New physics in lepton flavour violating μ -decays?



- The Challenge:

Finding one in 10^{16} muon decays




- The Mu3e Detector:

Minimum Material, Maximum Precision

The hunt for
charged lepton flavour violation



The Standard Model of Elementary Particles

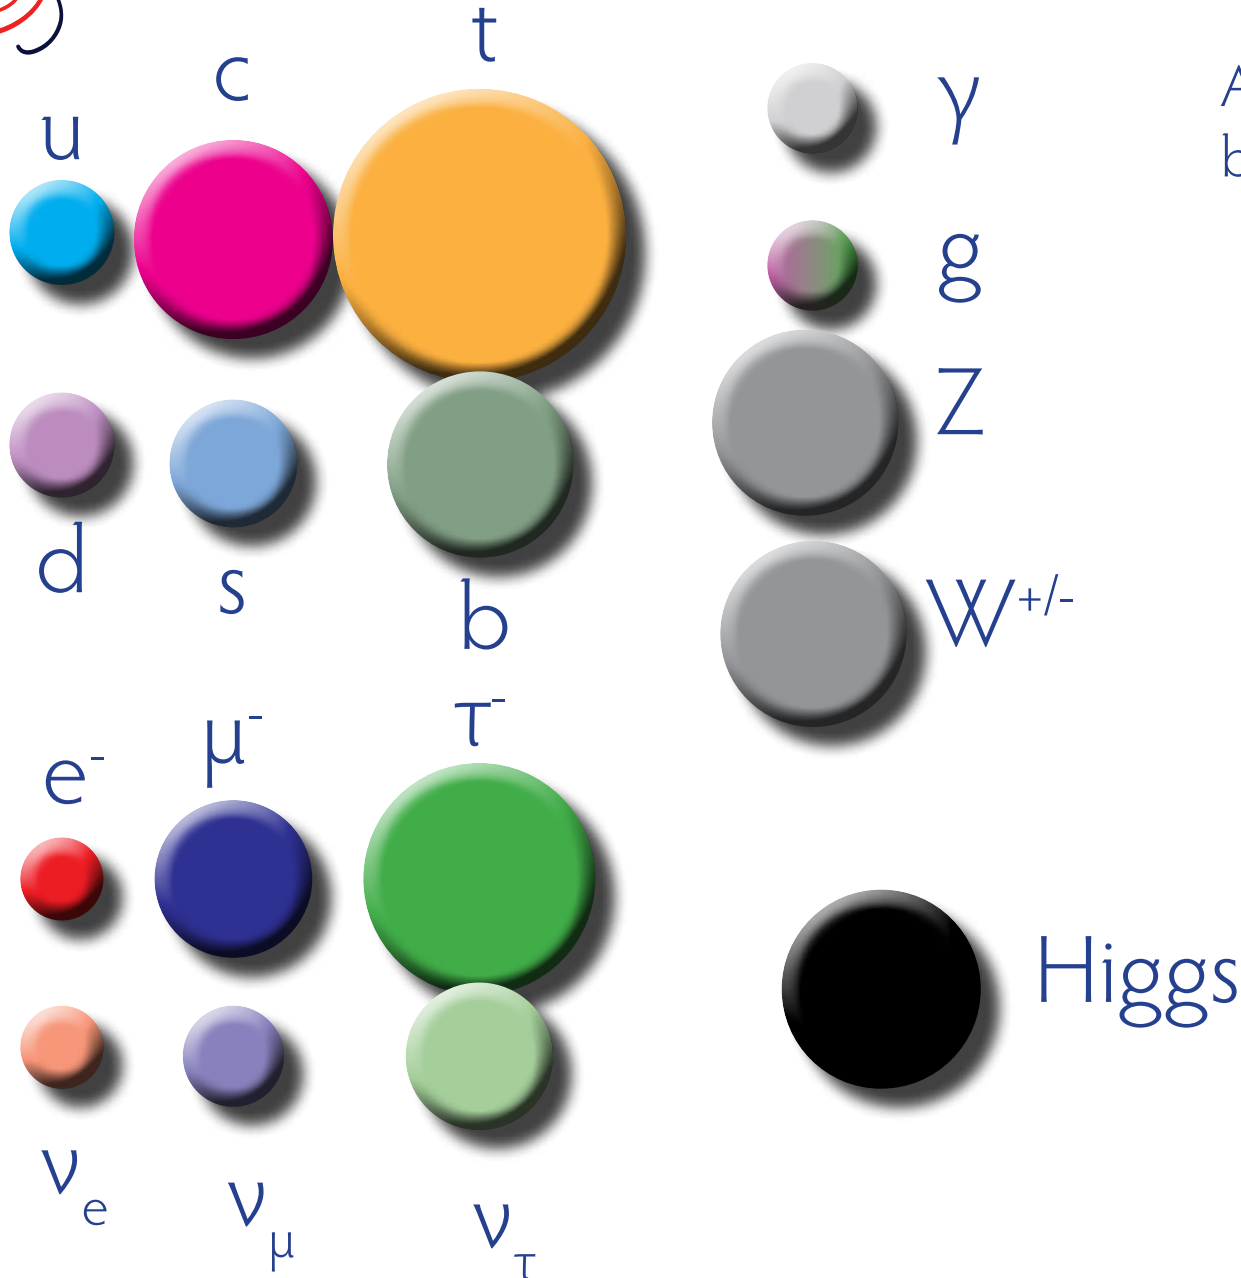


All there, works beautifully, but...

- Why three generations?
- Why the mixing patterns between generations?
- Is there more to it? (the dark universe...)



The Standard Model of Elementary Particles

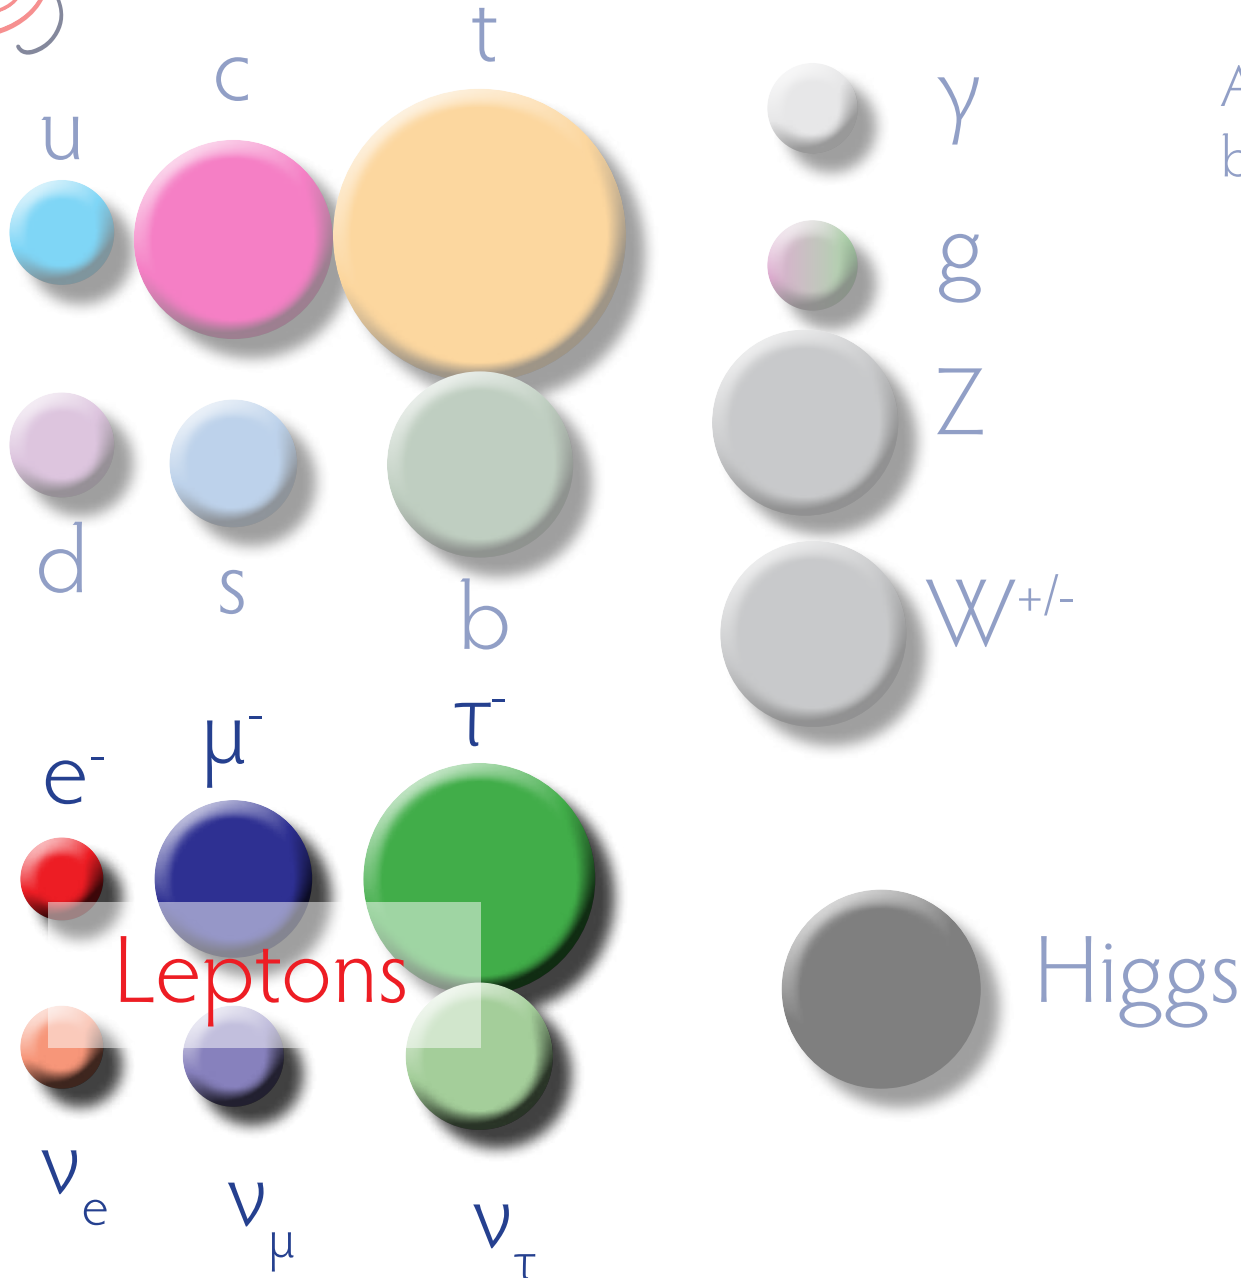


All there, works beautifully, but...

- Why three generations?
- Why the mixing patterns between generations?
- Is there more to it? (the dark universe...)


Lepton Bookkeeping

Normal Muon Decay:

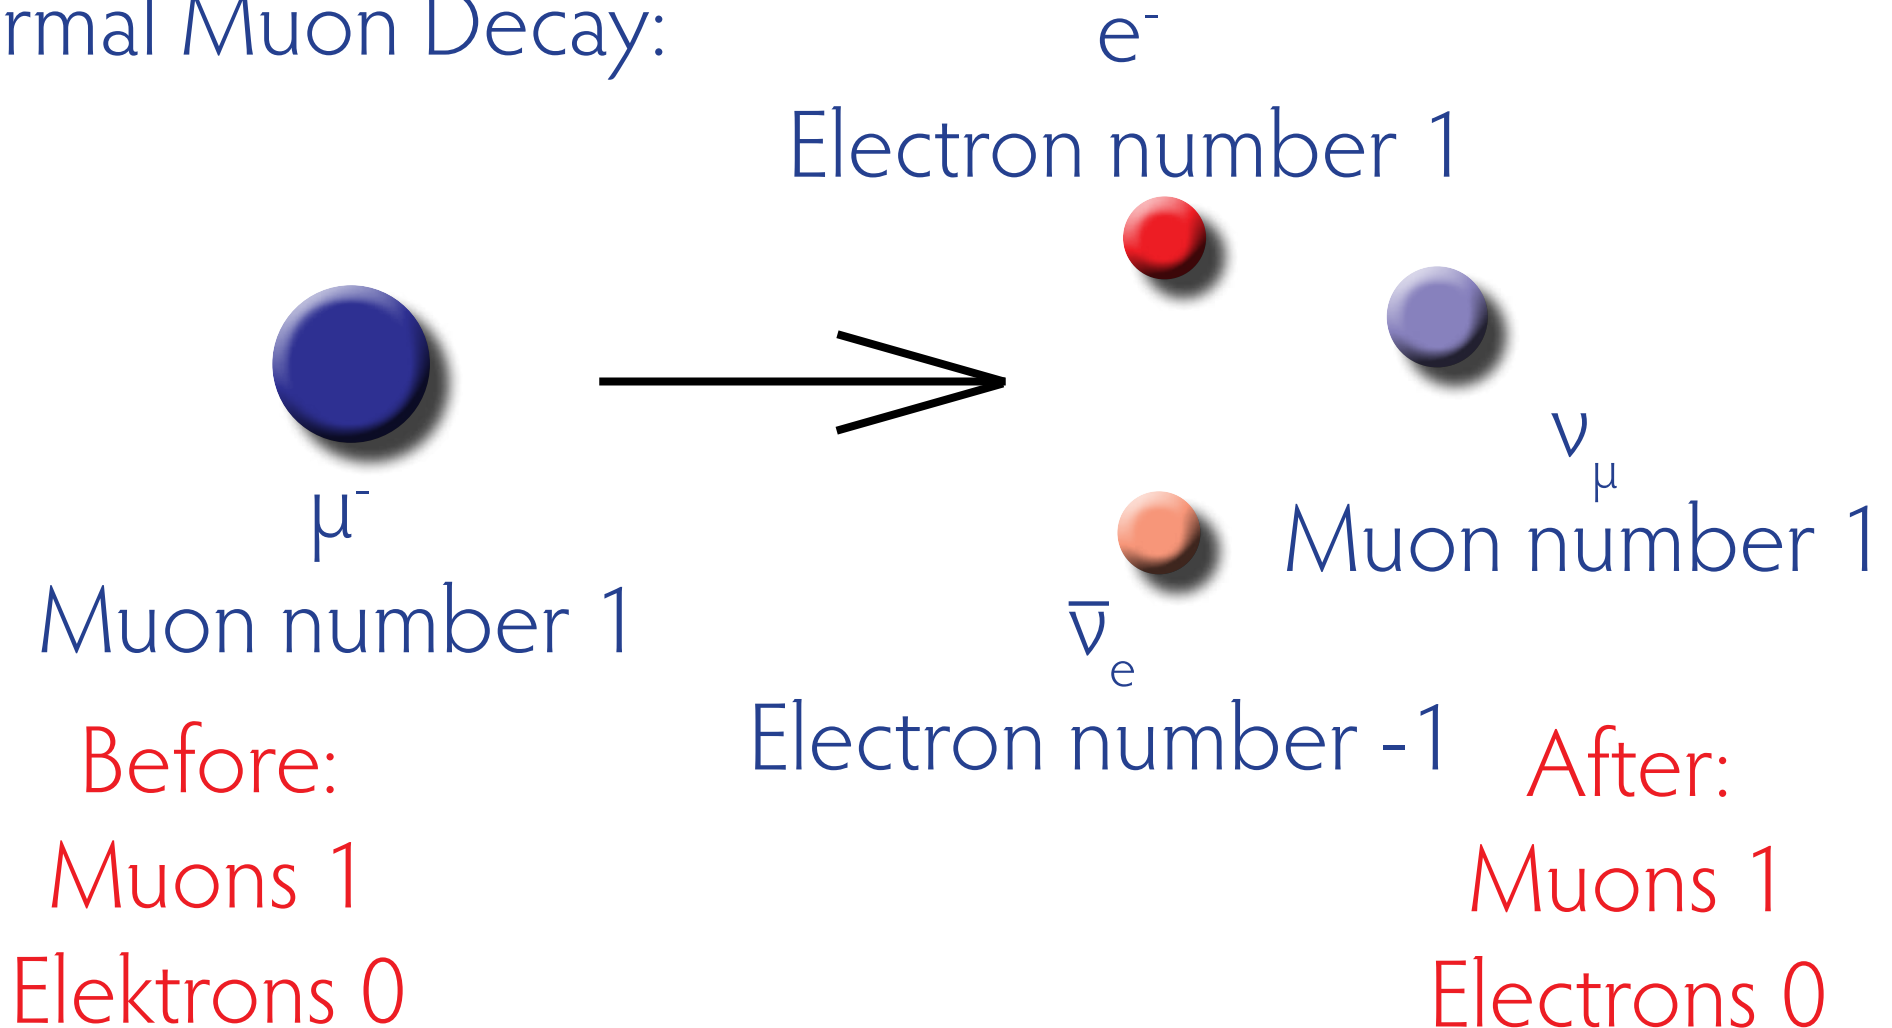





Cooked books?

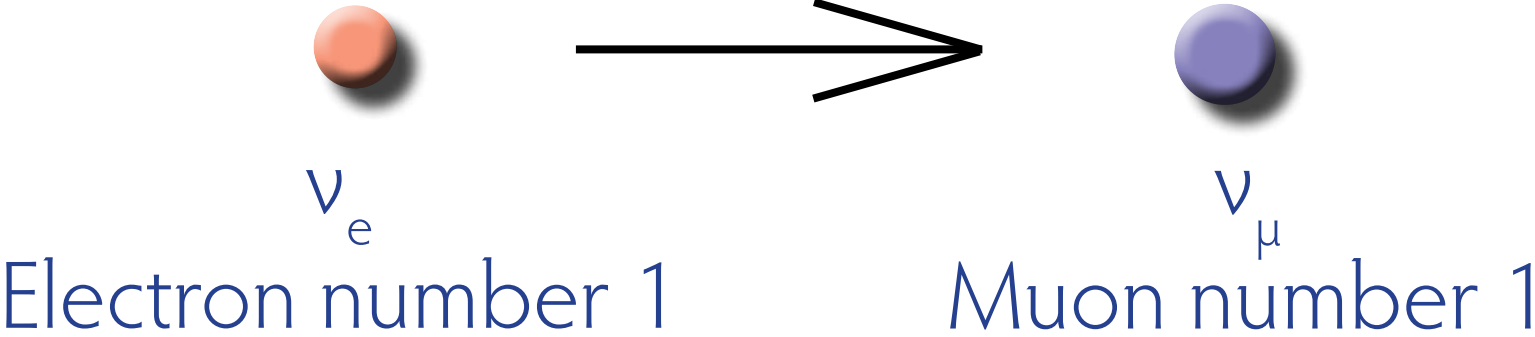

 Cooked books?

How about charged leptons (Muons)?

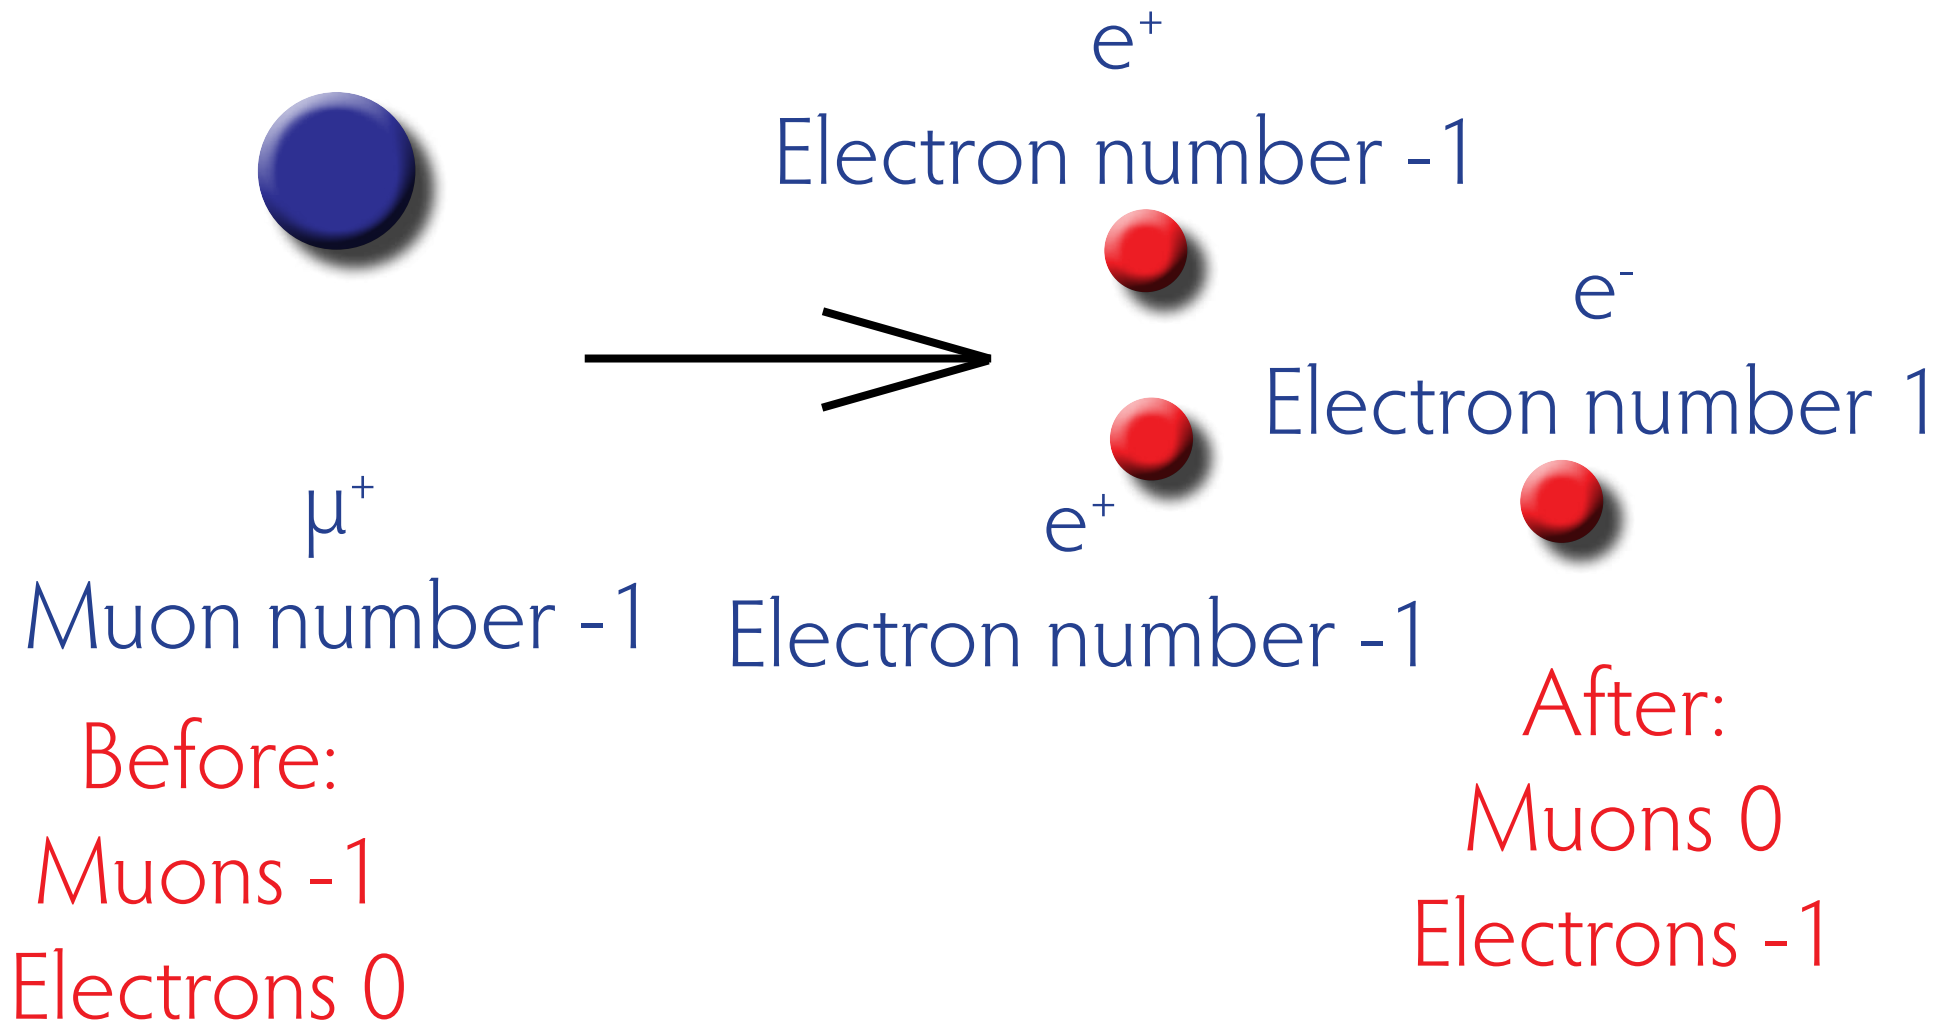

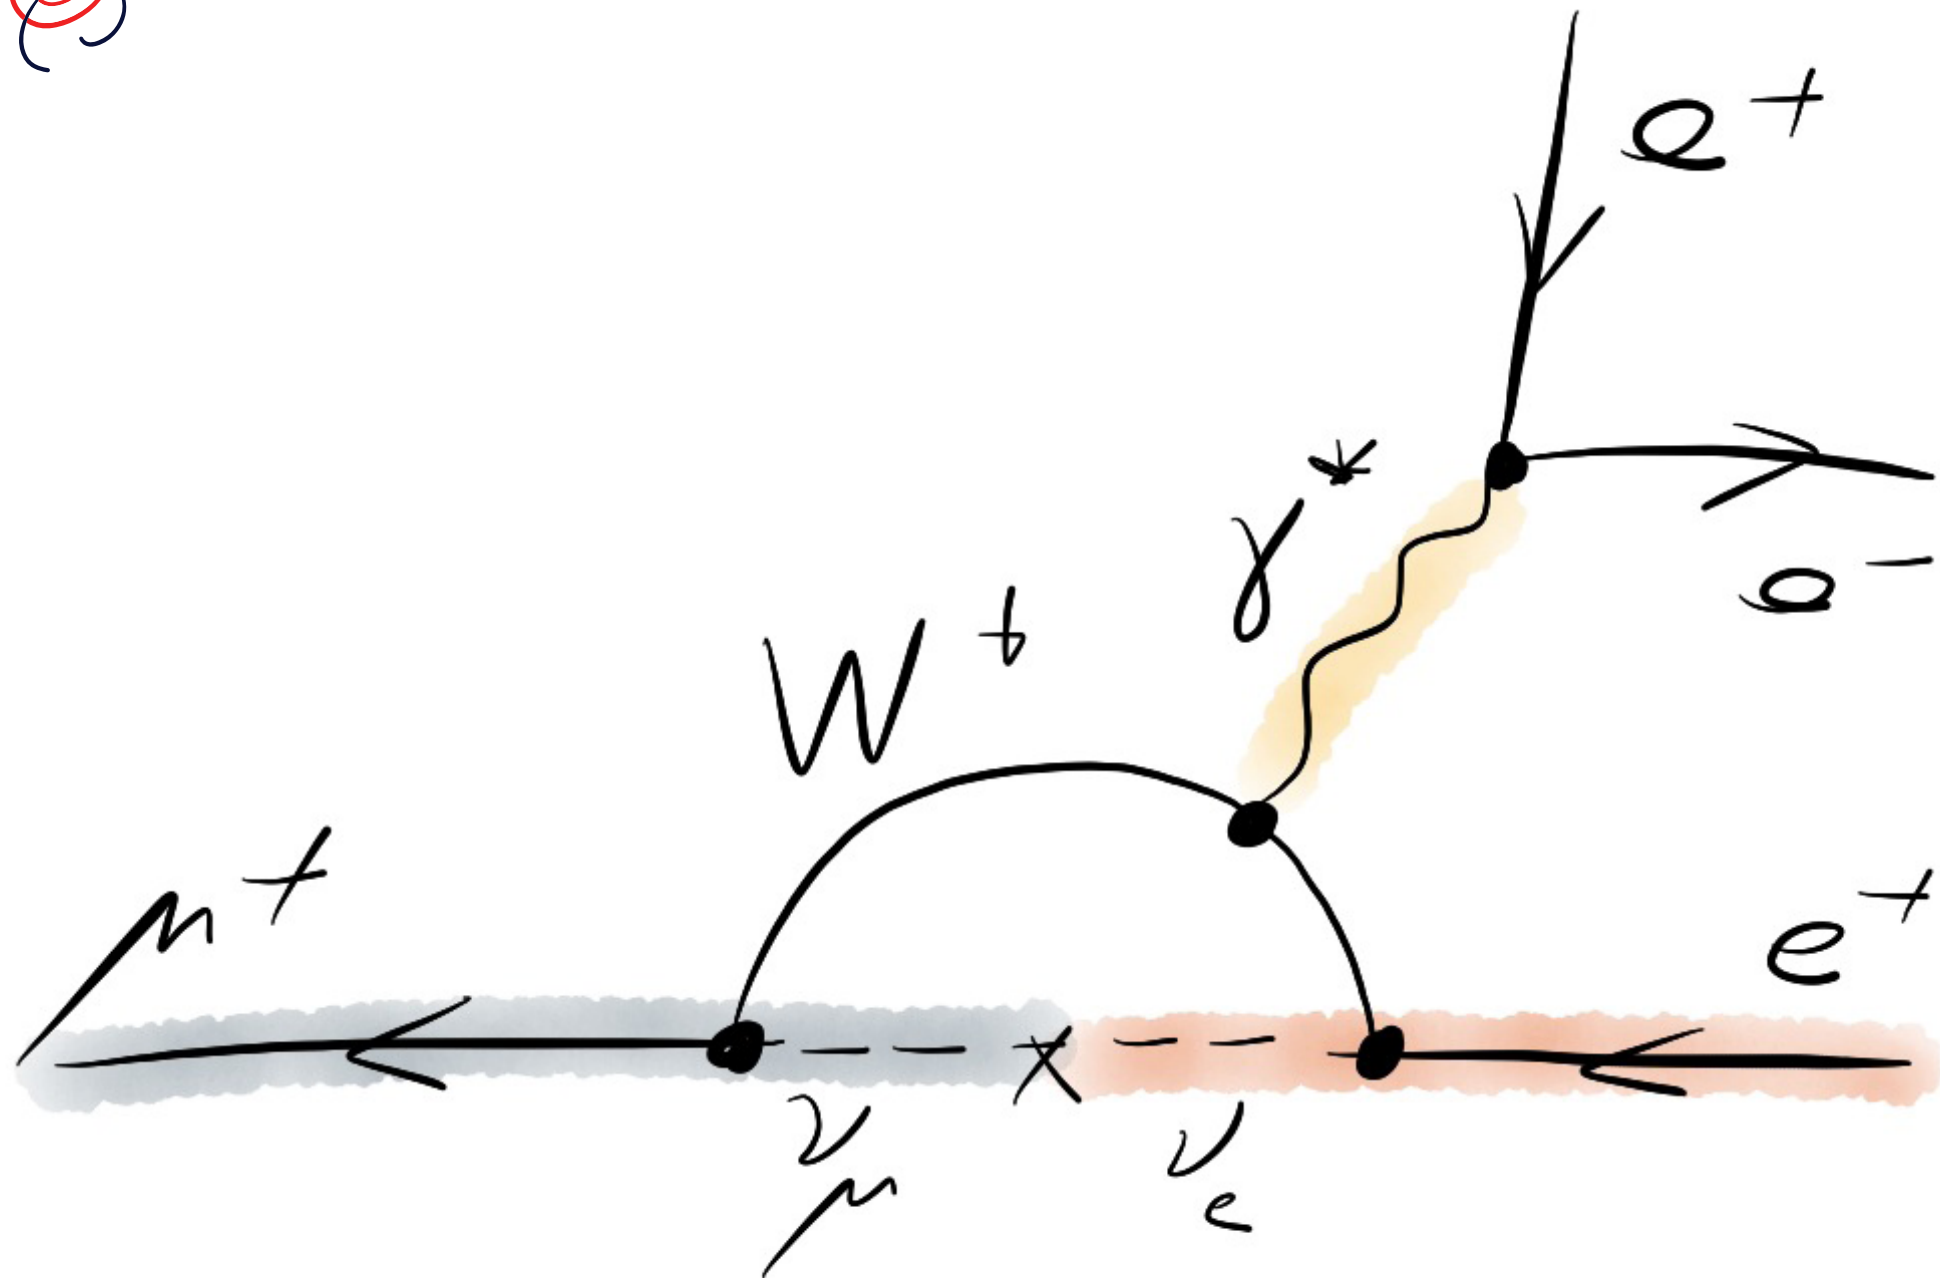




This
(charged lepton flavour violation)
has never been seen

and not because we have not looked



History of LFV experiments

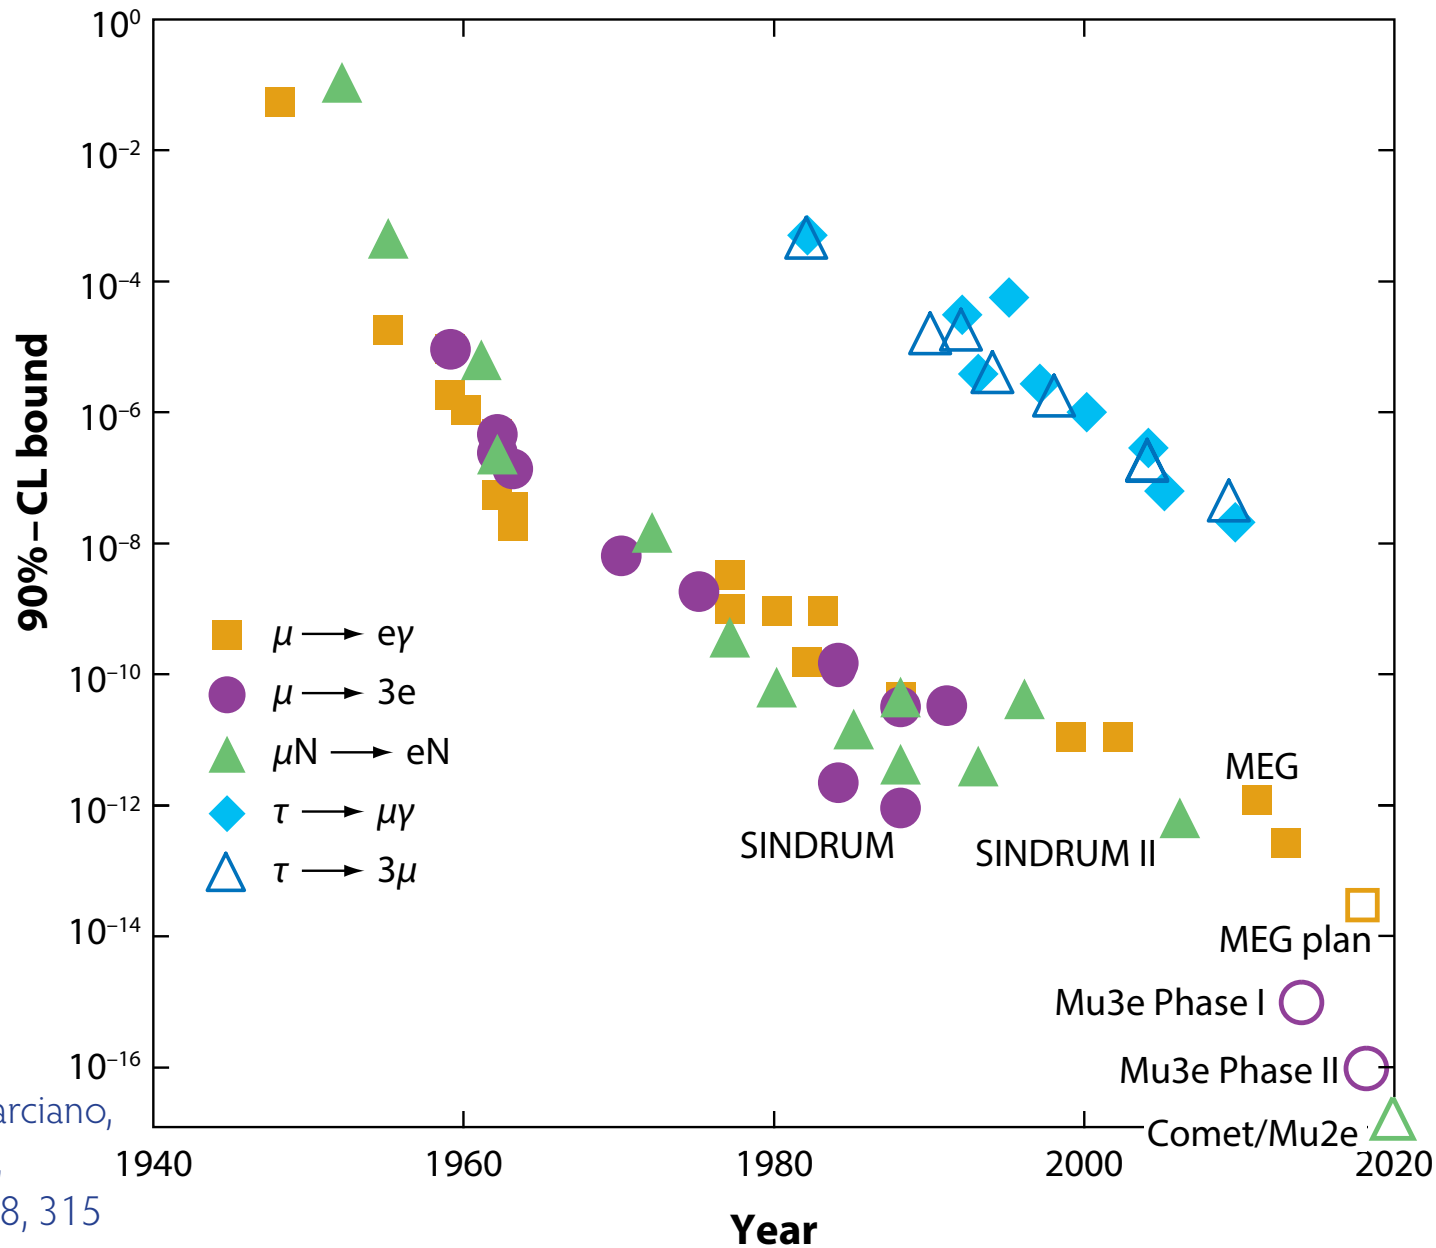


(Updated from W.J. Marciano,
T. Mori and J.M. Roney,
Ann.Rev.Nucl.Part.Sci. 58, 315
(2008))





Heavily suppressed in the SM
by $(\Delta m_\nu^2/m_W^2)^2$

Branching fraction $< 10^{-54}$

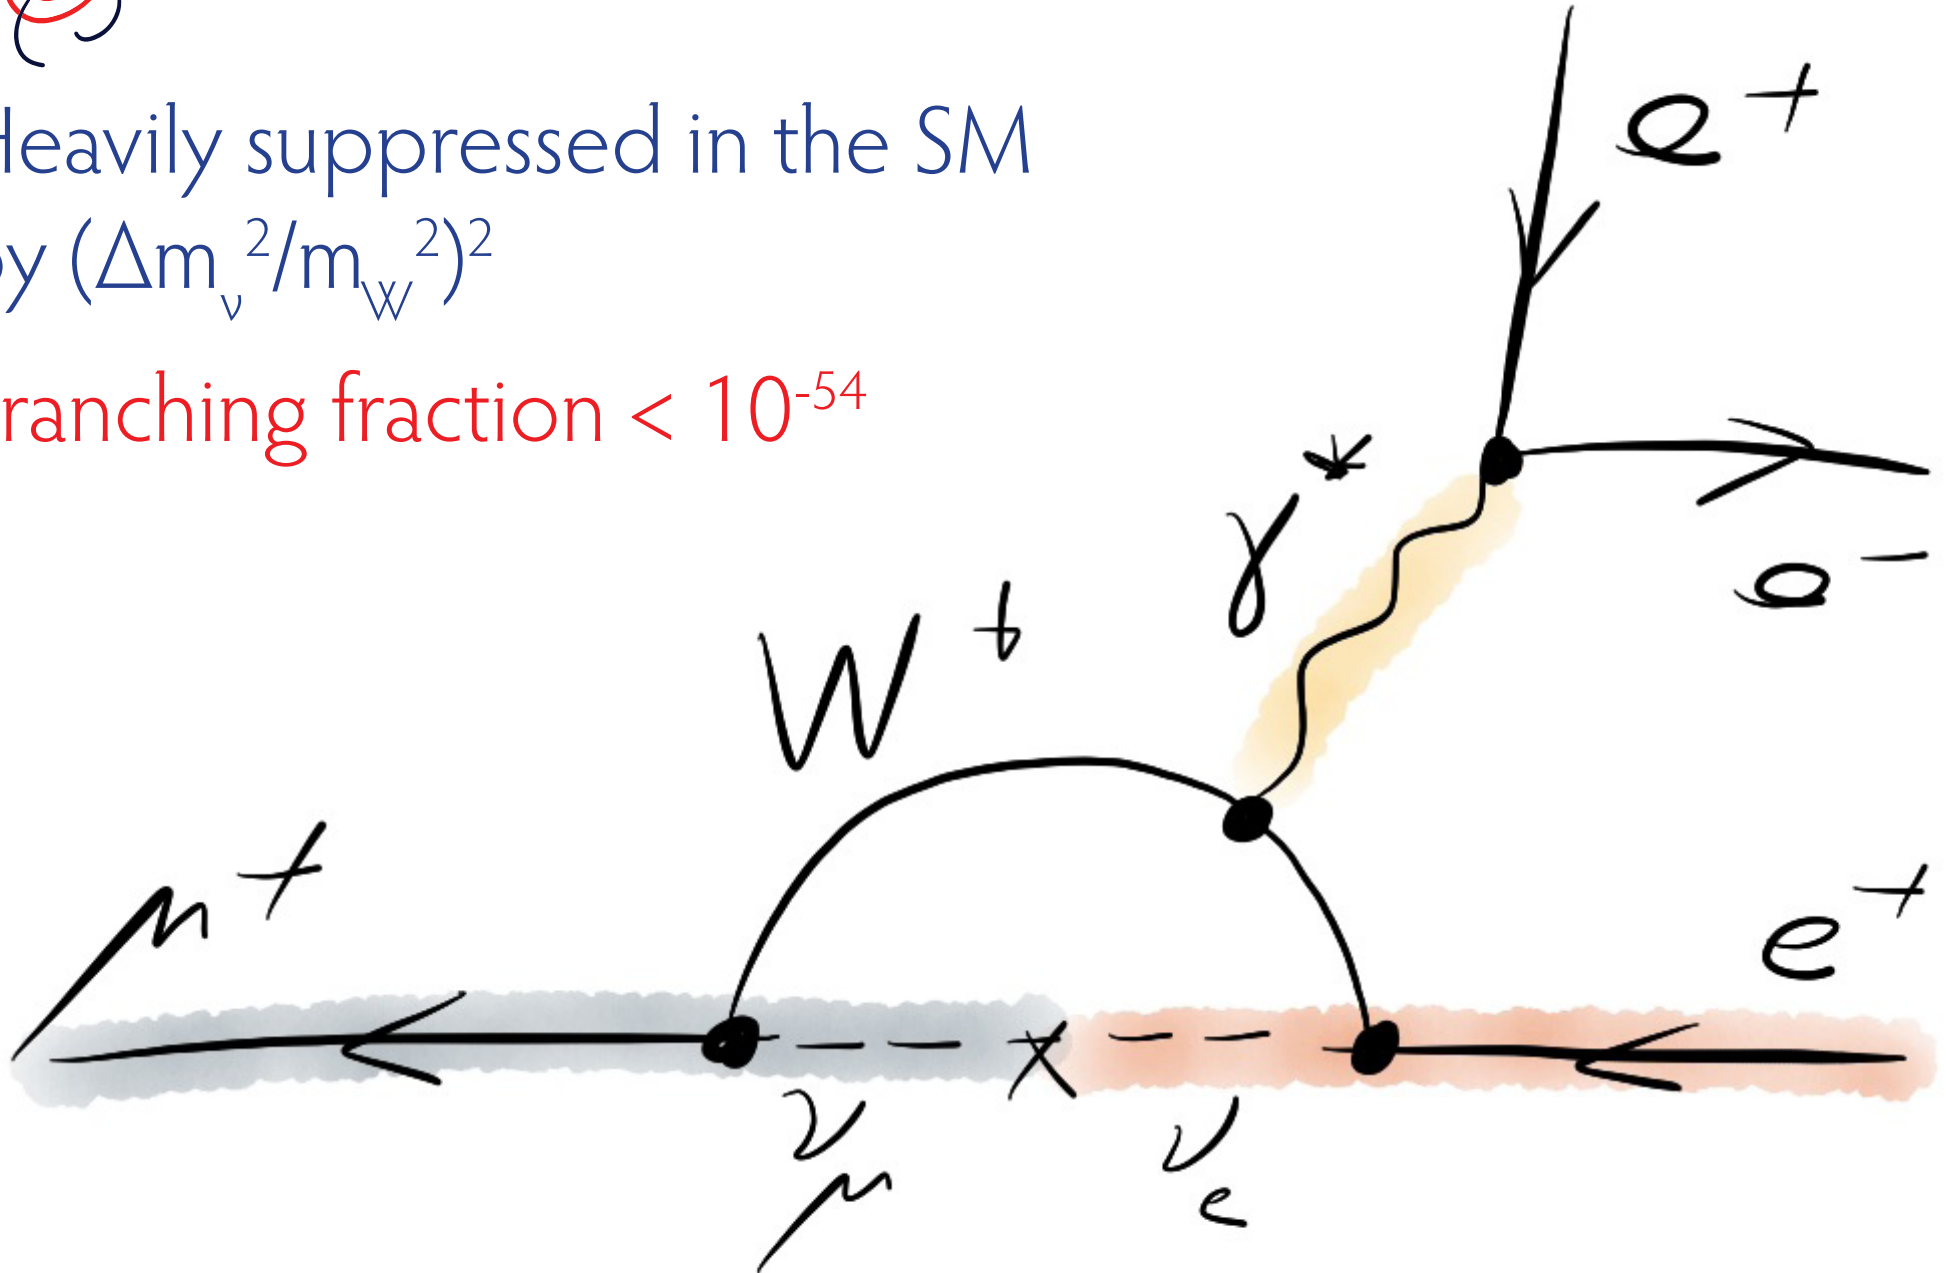

New physics in $\mu^+ \rightarrow e^+e^-e^+$

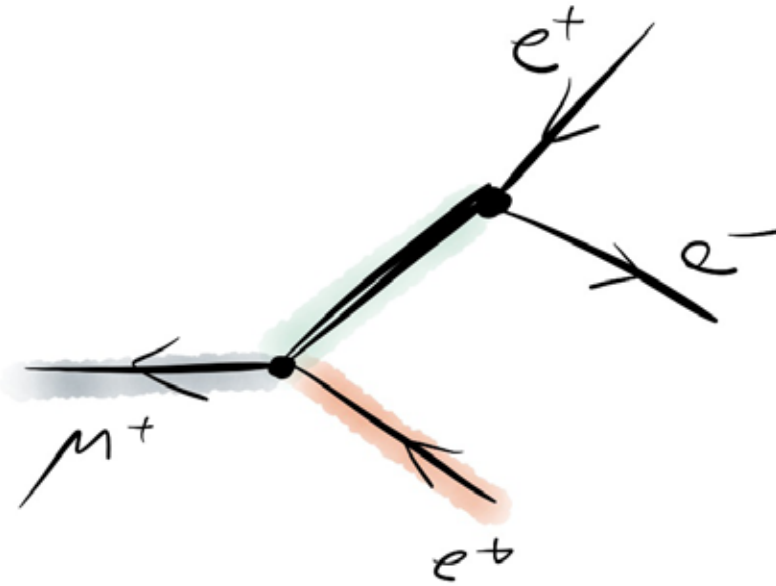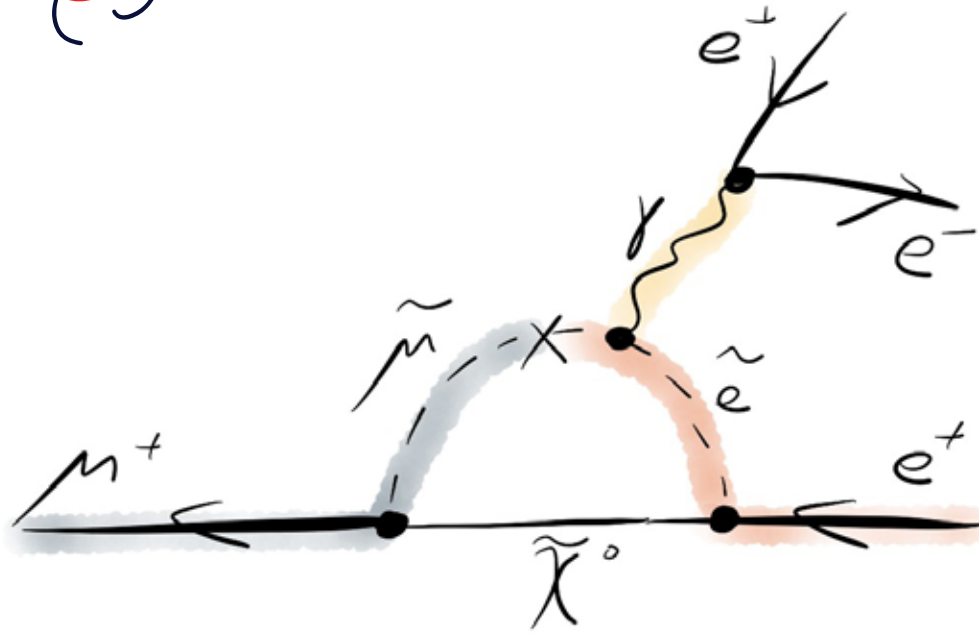


Loop diagrams

- Supersymmetry
- Little Higgs models
- Seesaw models
- GUT models (leptoquarks)
- and much more...

Tree diagrams

- Higgs triplet model
- Extra heavy vector bosons (Z')
- Extra dimensions (Kaluza-Klein tower)

 New physics in $\mu^+ \rightarrow e^+e^-e^+$

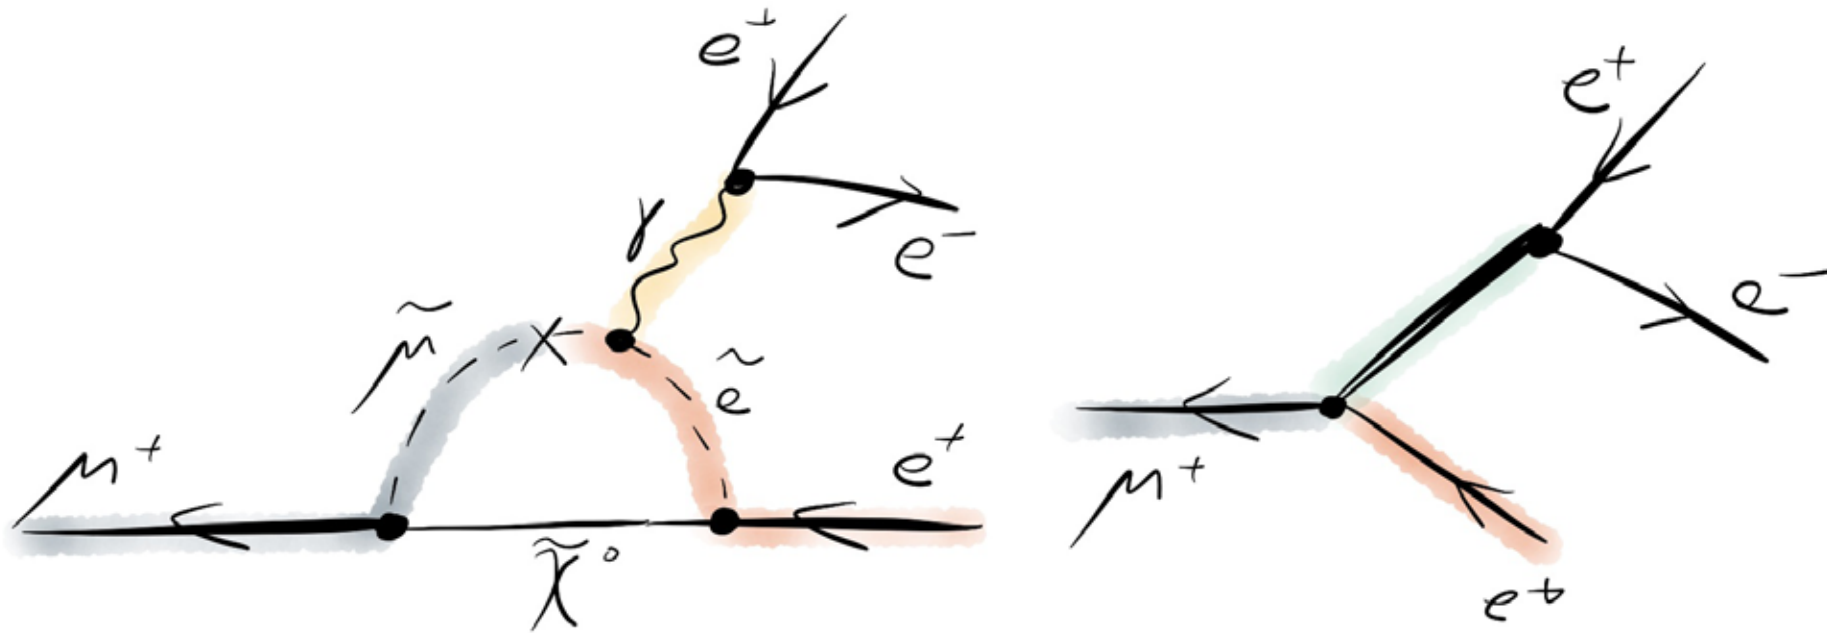


Muon decays sensitive to new physics at $O(1000 \text{ TeV})$
scale for $O(1)$ couplings!



The hunt for charged lepton flavour violation in μ -decays

LFV Muon Decays: Experimental Situation

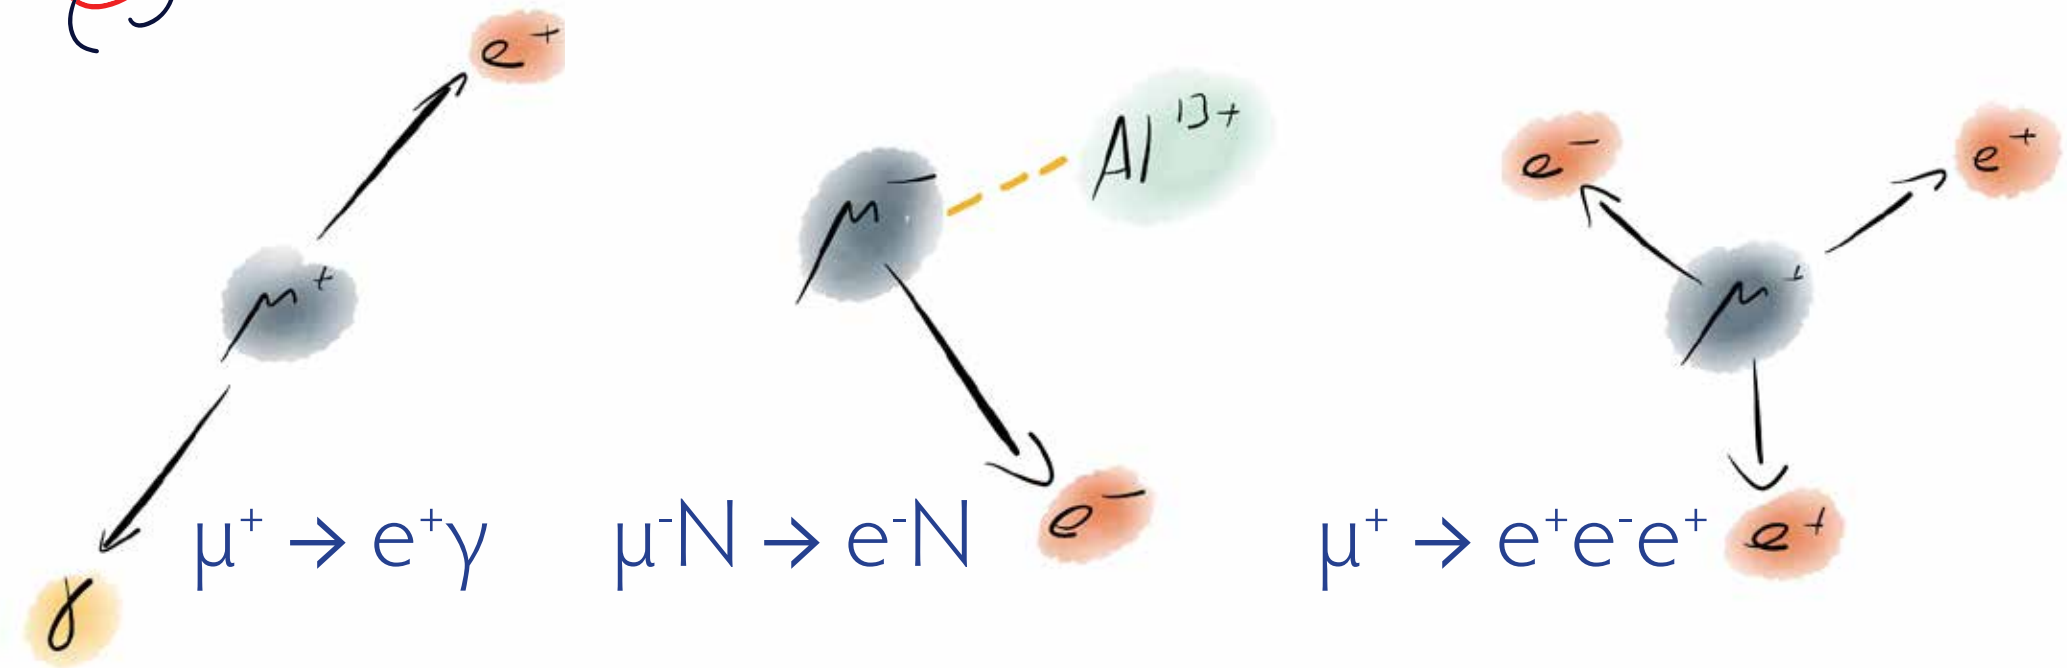

MEG (PSI)

$$B(\mu^+ \rightarrow e^+ \gamma) < 5.7 \cdot 10^{-13}$$

(2013)

SINDRUM II (PSI)

$$B(\mu^- \text{Au} \rightarrow e^- \text{Au}) < 7 \cdot 10^{-13}$$


(2006)

SINDRUM (PSI)

$$B(\mu^+ \rightarrow e^+ e^- e^+) < 1.0 \cdot 10^{-12}$$

(1988)

LFV Muon Decays: Experimental Situation

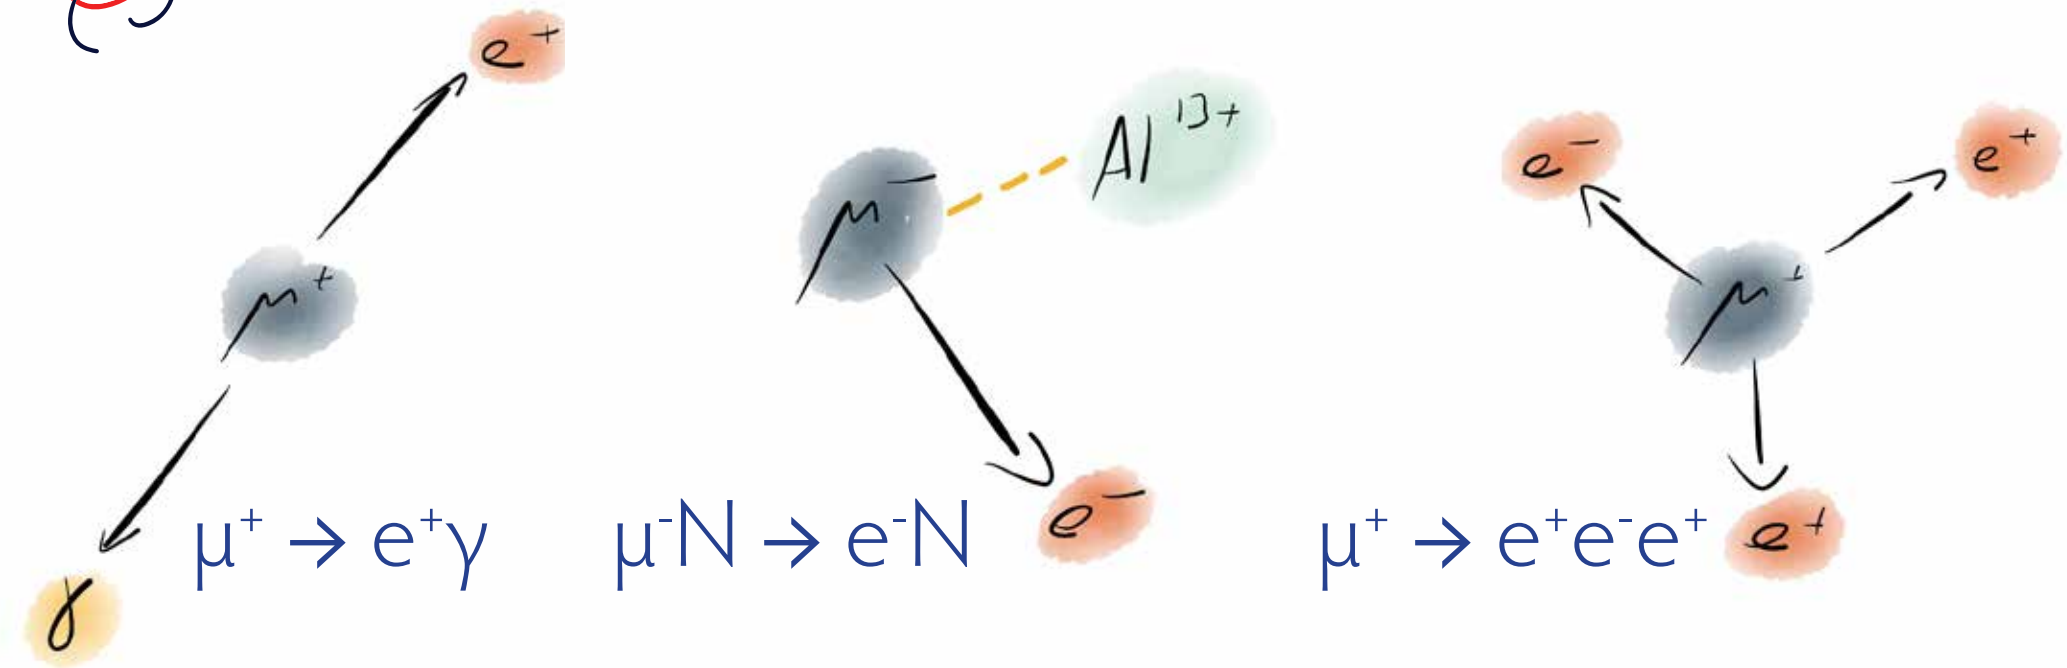

MEG (PSI)

$$B(\mu^+ \rightarrow e^+ \gamma) < 5.7 \cdot 10^{-13}$$

(2013)

upgrading

SINDRUM II (PSI)

$$B(\mu^- \text{Au} \rightarrow e^- \text{Au}) < 7 \cdot 10^{-13}$$

(2006)

Mu2e/Comet




SINDRUM (PSI)

$$B(\mu^+ \rightarrow e^+ e^- e^+) < 1.0 \cdot 10^{-12}$$

(1988)

Mu3e

LFV Muon Decays: Experimental signatures

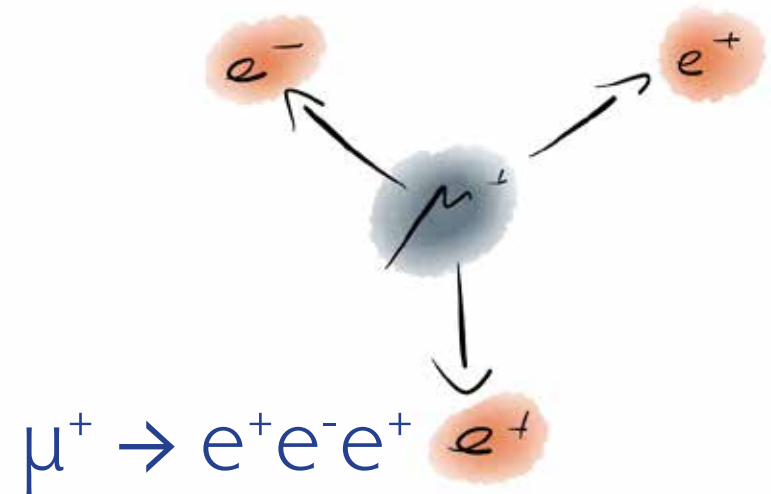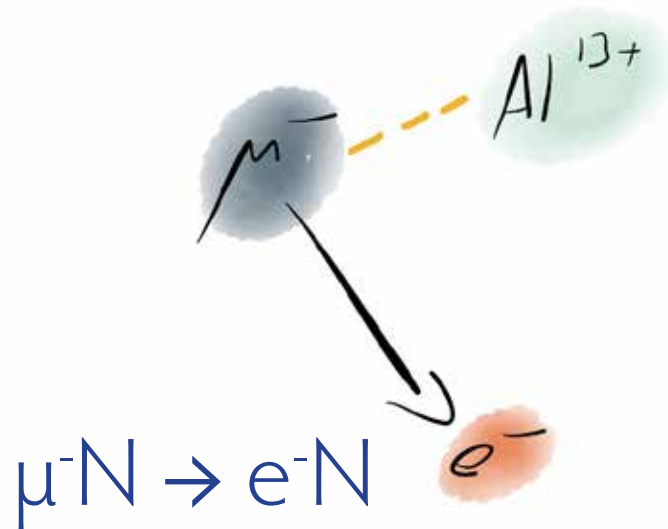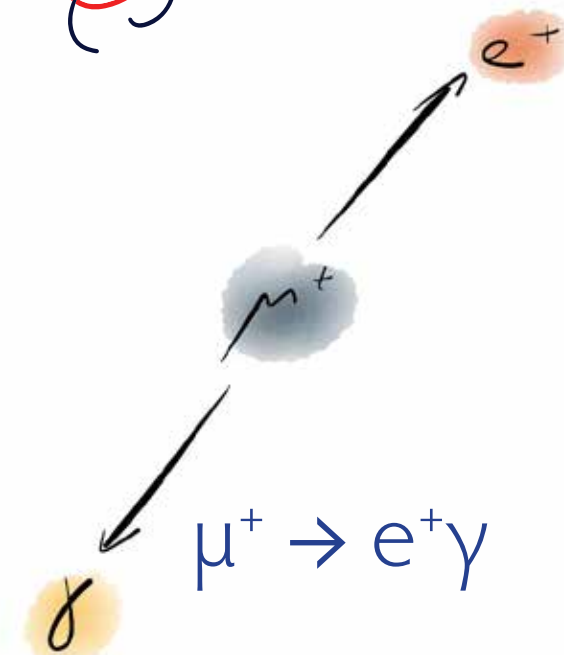

Kinematics

- 2-body decay
- Monoenergetic e^+ , γ
- Back-to-back




Kinematics

- Quasi 2-body decay
- Monoenergetic e^-
- Single particle detected

Kinematics

- 3-body decay
- Invariant mass constraint
- $\sum p_i = 0$

LFV Muon Decays: Experimental signatures

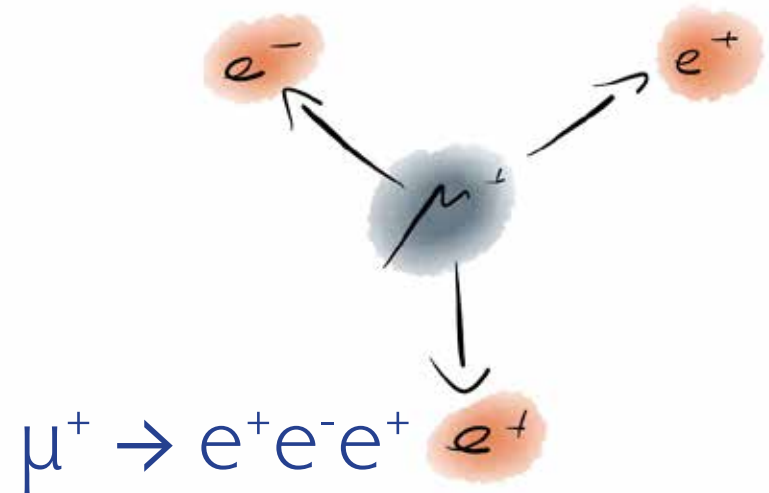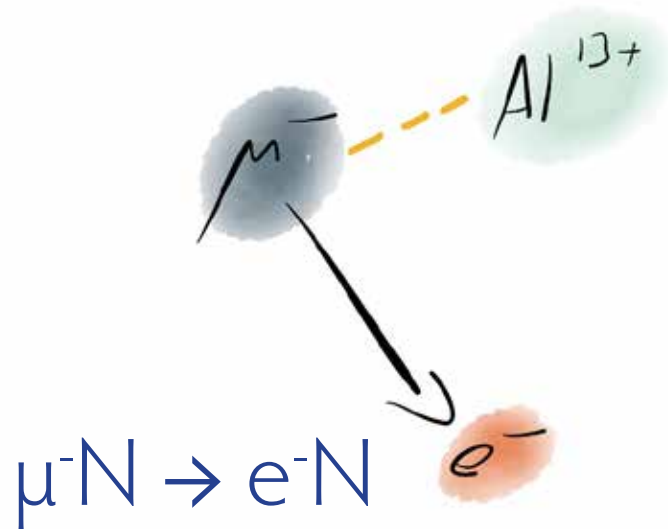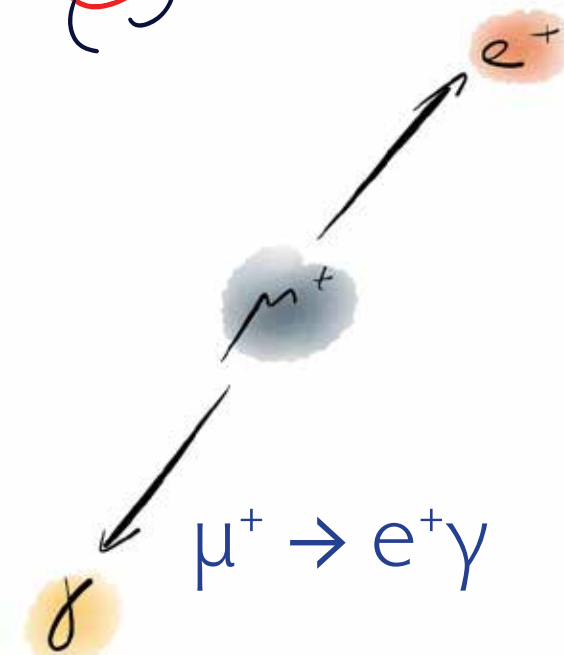

Kinematics

- 2-body decay
- Monoenergetic e^+ , γ
- Back-to-back

Background

- Accidental background

Kinematics

- Quasi 2-body decay
- Monoenergetic e^-
- Single particle detected

Background

- Decay in orbit
- Antiprotons, pions, cosmics




Kinematics

- 3-body decay
- Invariant mass constraint
- $\sum p_i = 0$

Background

- Radiative decay
- Accidental background

LFV Muon Decays: Experimental signatures

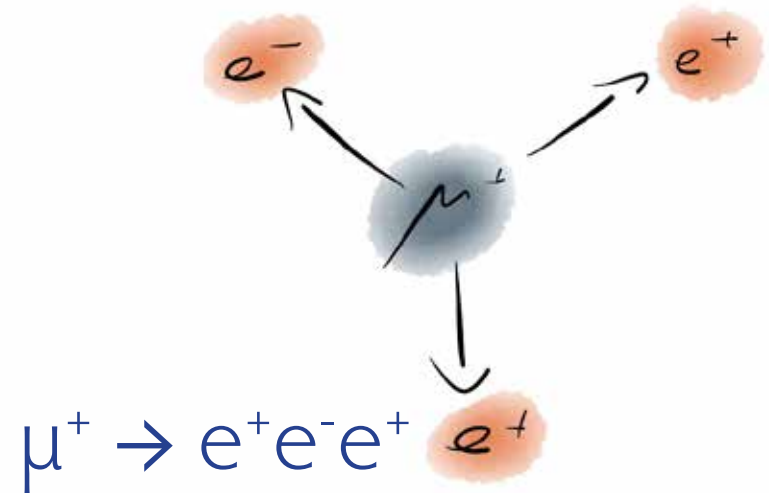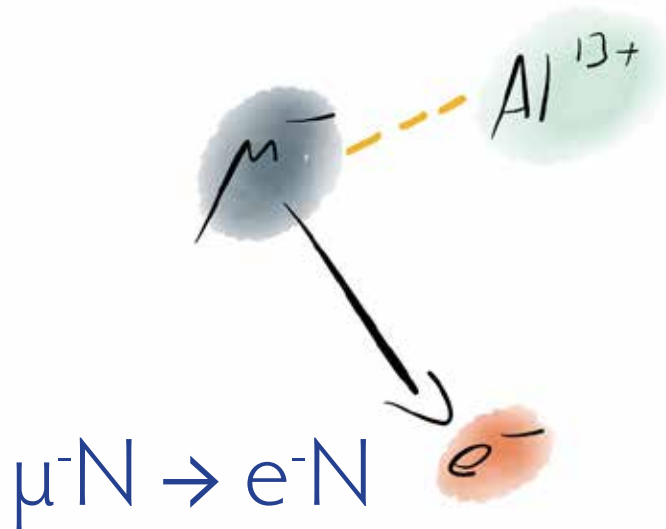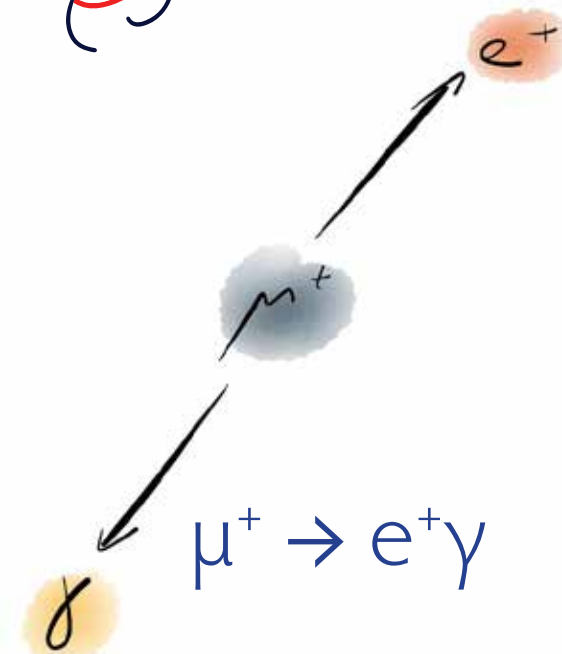

Kinematics

- 2-body decay
- Monoenergetic
- Back-to-back

Background

- Atomic background

Kinematics

- Quasi 2-body decay
- Monoenergetic
- Single particle detected

Background

- Γ orbit
- Atomic protons, pions

Kinematics

- 3-body decay
- Invariant mass constraint
- $\sum p_i = 0$

Background

- Radiative decay
- Atomic background

Continuous Beam

Pulsed Beam

Continuous Beam




Searching for
 $\mu^+ \rightarrow e^+e^-e^+$ at the 10^{-16} level



The Goal: 10^{-16}

- We want to find or exclude $\mu \rightarrow eee$ at the 10^{-16} level

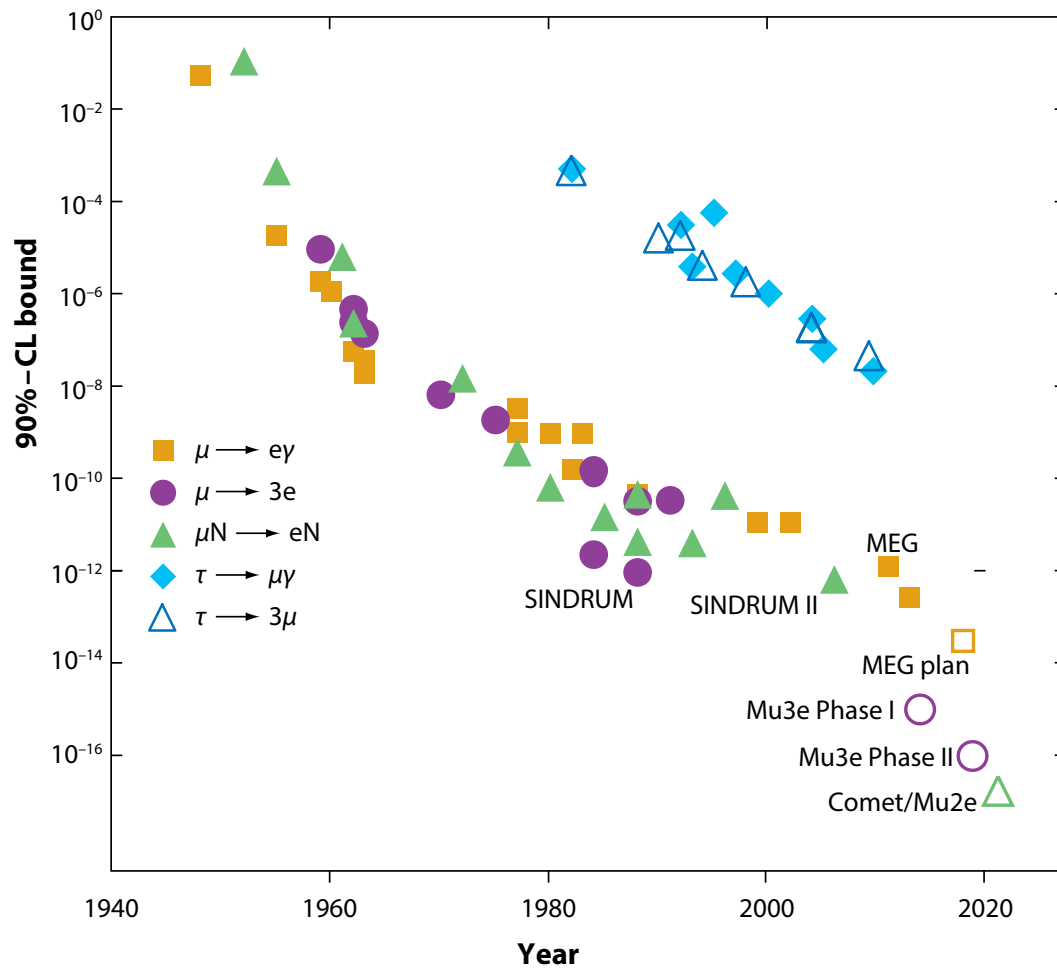

- 10^{-15} in phase I (existing beamline)
- 10^{-16} in phase II (new beamline)
- 4 orders of magnitude over previous experiment (SINDRUM 1988)

(Updated from W.J. Marciano, T. Mori and J.M. Roney, *Ann.Rev.Nucl.Part.Sci.* 58, 315 (2008))



The Mu3e Collaboration



**UNIVERSITÉ
DE GENÈVE**

- DPNC, Geneva University



- Physics Institute, Heidelberg University



- KIP, Heidelberg University



KIT
Karlsruhe Institute of Technology

- IPE, Karlsruhe Institute of Technology

PAUL SCHERRER INSTITUT



- Paul Scherrer Institute



- Physics Institute, Zürich University

ETH

Eidgenössische Technische Hochschule Zürich
Swiss Federal Institute of Technology Zurich

- Institute for Particle Physics, ETH Zürich


JOHANNES GUTENBERG
UNIVERSITÄT MAINZ



- Institute for Nuclear Physics, JGU Mainz



The Challenges

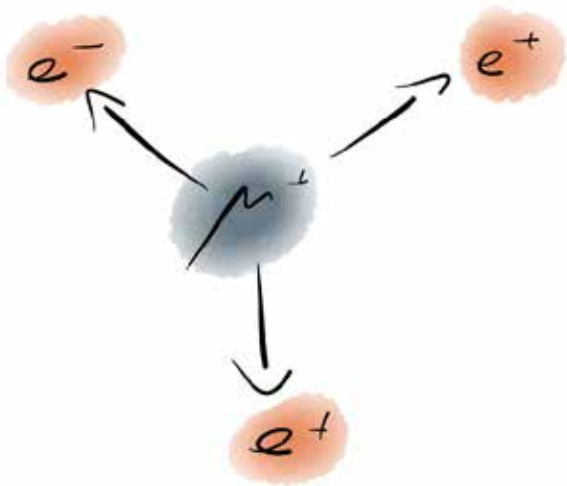

- Observe more than 10^{16} muon decays:
2 Billion muons per second
- Suppress backgrounds by more than 16 orders of magnitude
- Be sensitive for the signal

The logo of the Paul Scherrer Institute (PSI) features a stylized red and black circular design with the letters 'PSI' integrated into it.

Muons from PSI

Paul Scherrer Institute in Villigen, Switzerland






Muons from PSI

Paul Scherrer Institute in Villigen, Switzerland

World's most intensive proton beam

2.2 mA at 590 MeV: 1.3 MW of beam power

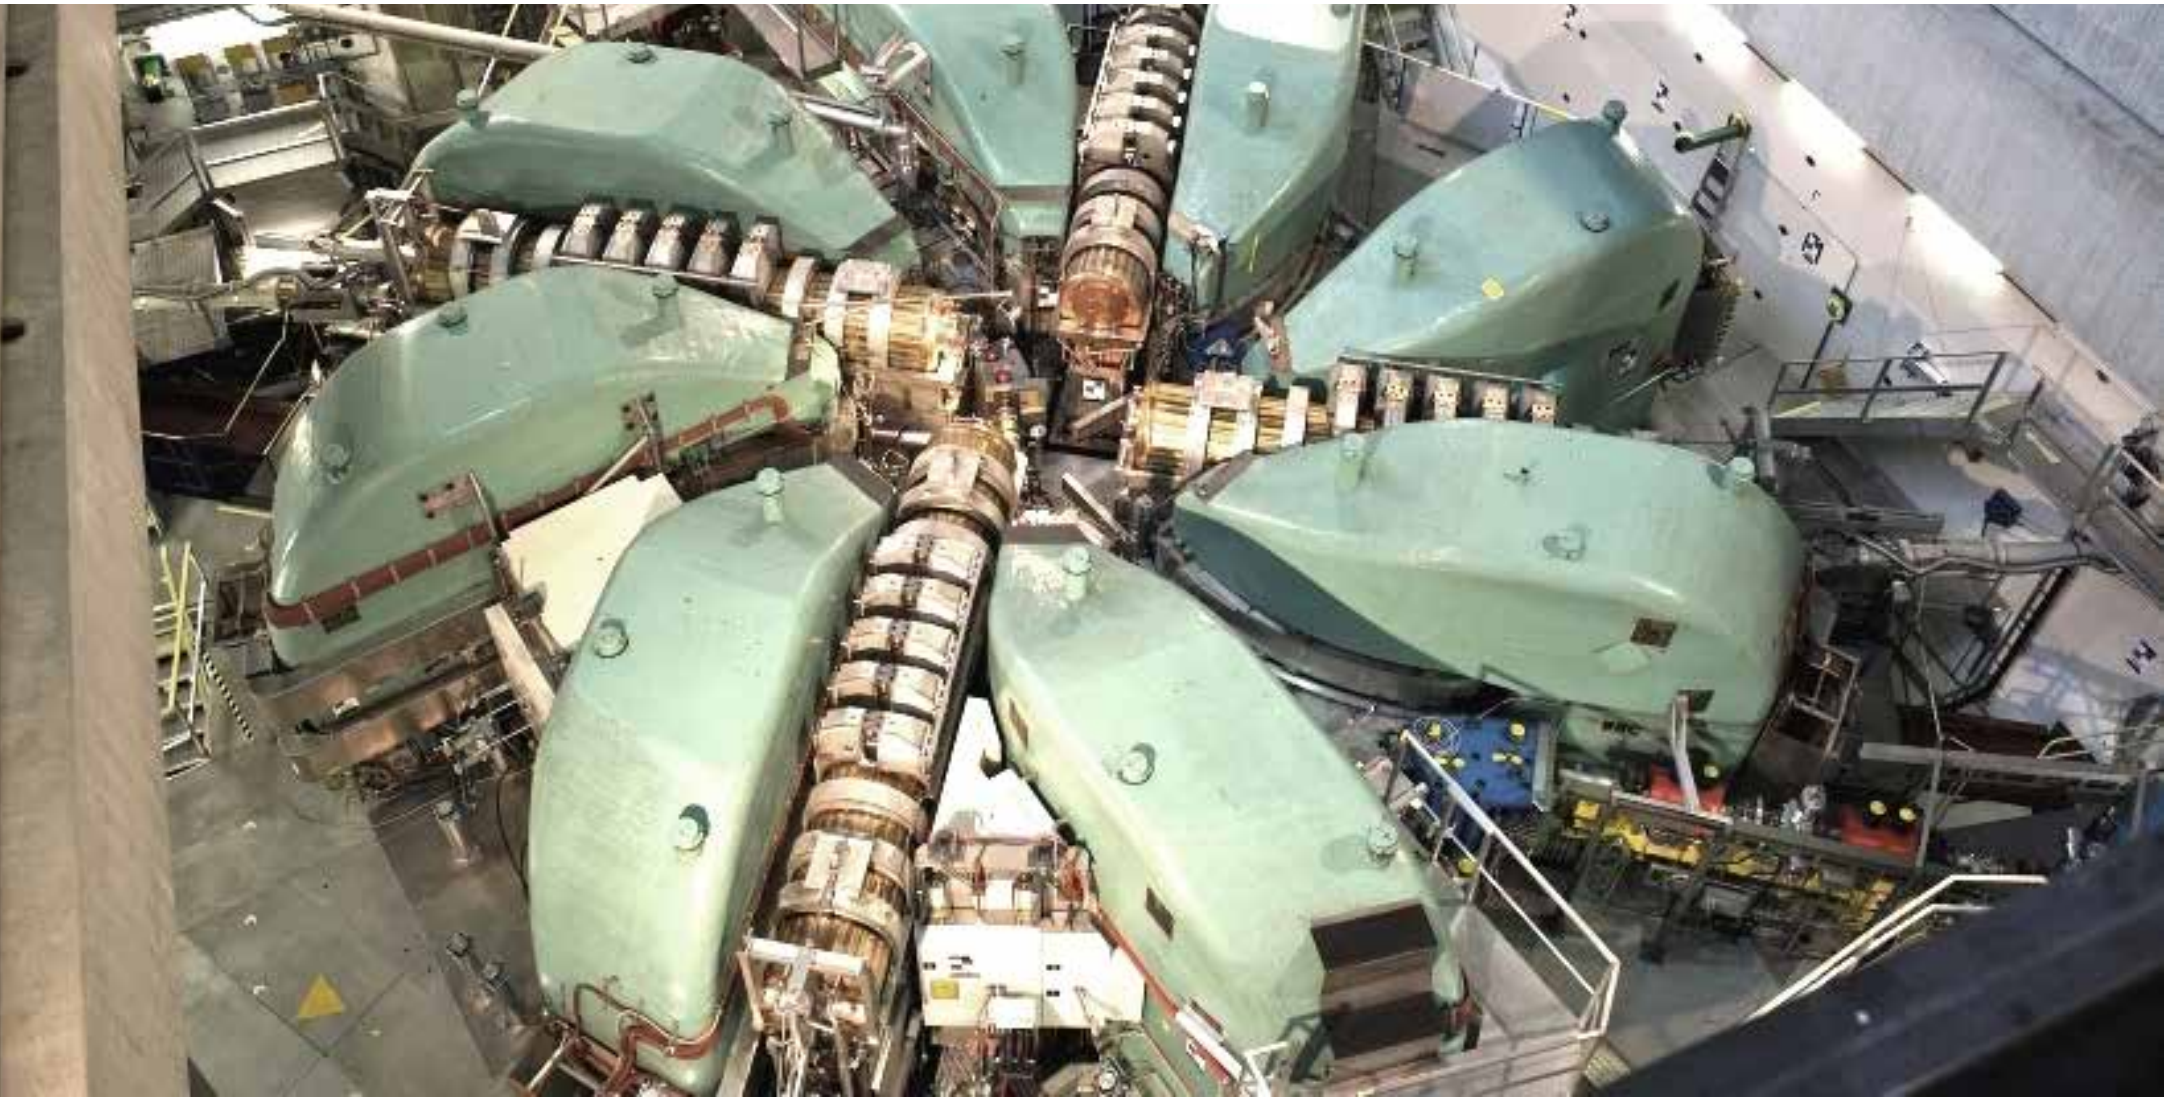

Muons from PSI

DC muon beams at PSI:



- π E5 beamline: $\sim 10^8$ muons/s
(MEG experiment, Mu3e phase I)
- Surface muons, $p = 29.7$ MeV/c
Stopped in < 1 mm of plastic
- More than $\sim 10^{11}$ muons/s are produced
bring magnetic elements closer to capture them:
High intensity muon beamline (HiMB)
study currently ongoing
- The $\mu \rightarrow eee$ experiment (final stage)
requires 2×10^9 muons/s focused and
collimated on a ~ 2 cm spot





Building the Mu3e Experiment



Stop muons, let them decay


muon beam

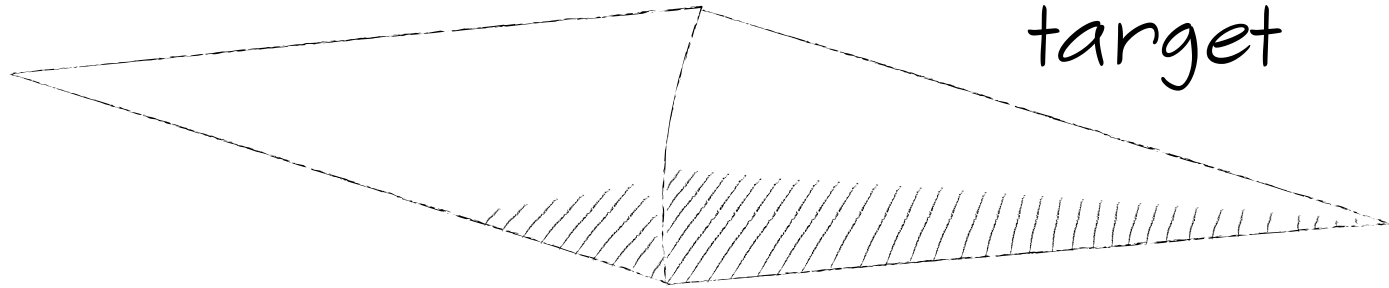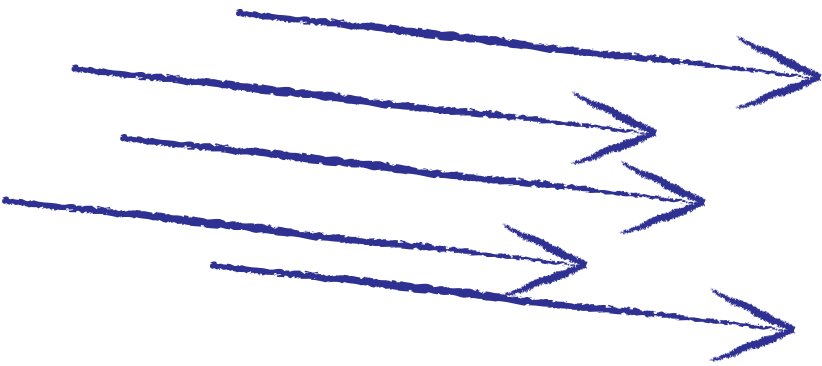

target




The signal

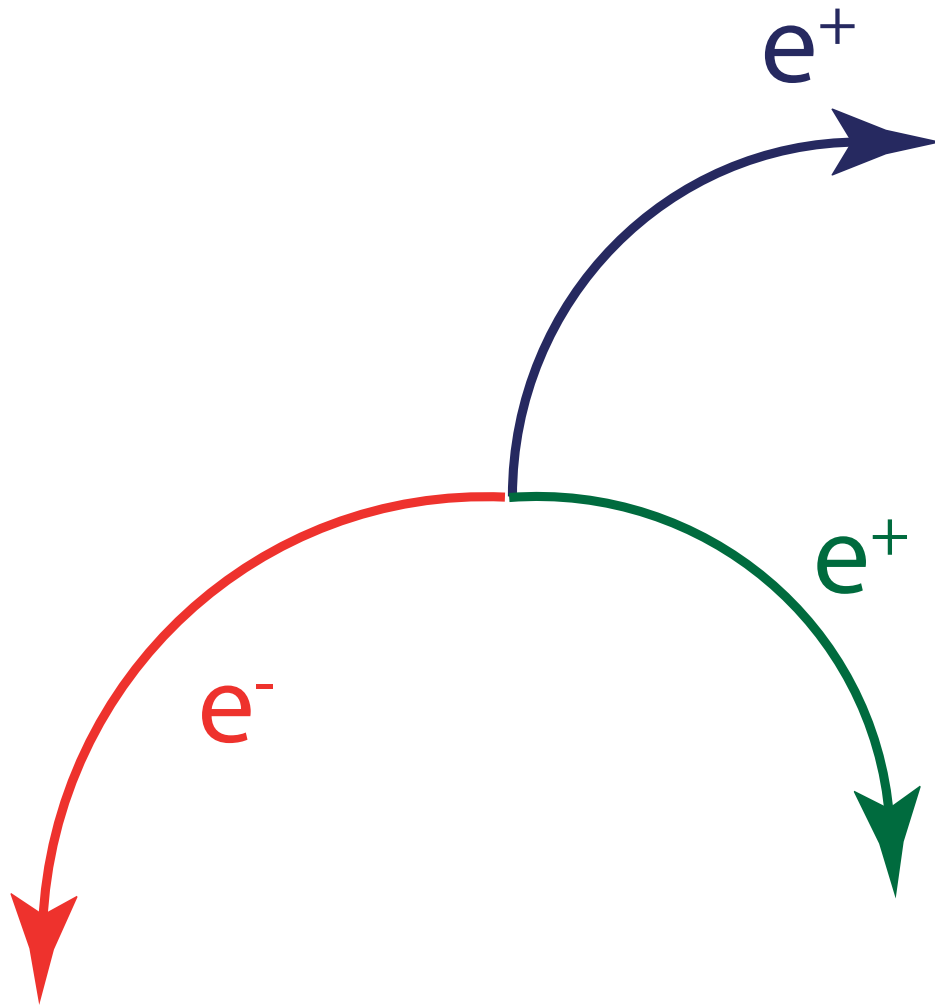

- $\mu^+ \rightarrow e^+e^-e^+$
- Two positrons, one electron
- From same vertex
- Same time
- Sum of 4-momenta corresponds to muon at rest
- Maximum momentum: $\frac{1}{2} m_\mu = 53 \text{ MeV}/c$

Accidental Background

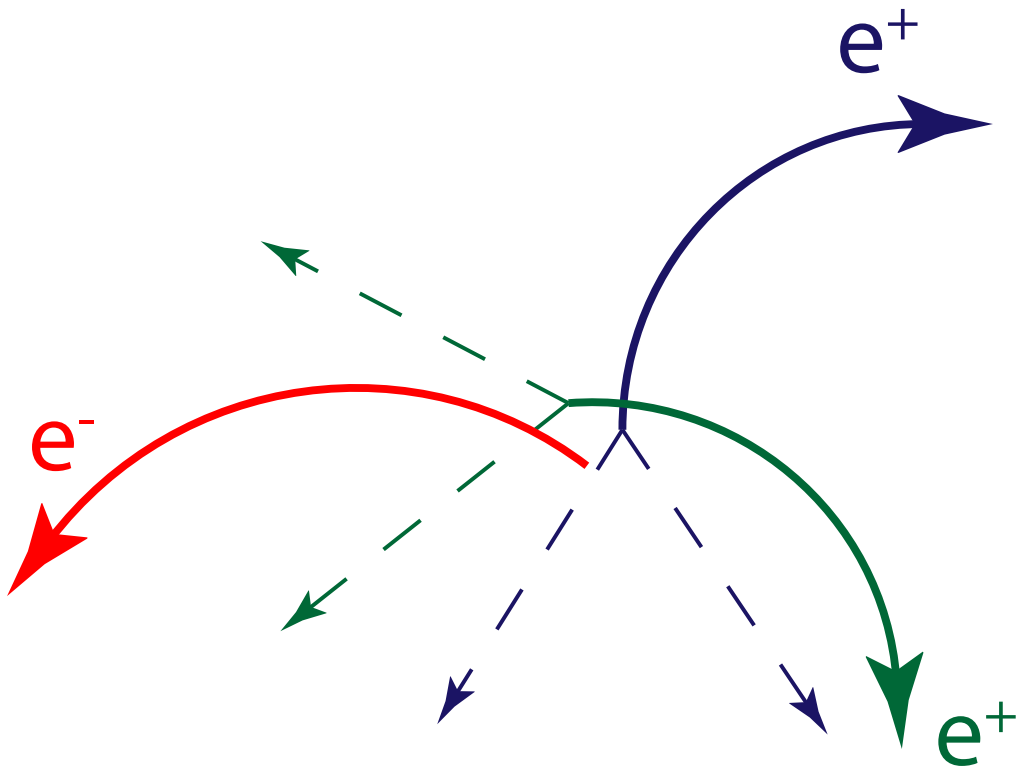

- Combination of positrons from ordinary muon decay with electrons from:
 - photon conversion,
 - Bhabha scattering,
 - Mis-reconstruction
- Need very good timing, vertex and momentum resolution

Internal conversion background




- Allowed radiative decay with internal conversion:



- Only distinguishing feature:
Missing momentum carried by neutrinos

- Need excellent momentum resolution

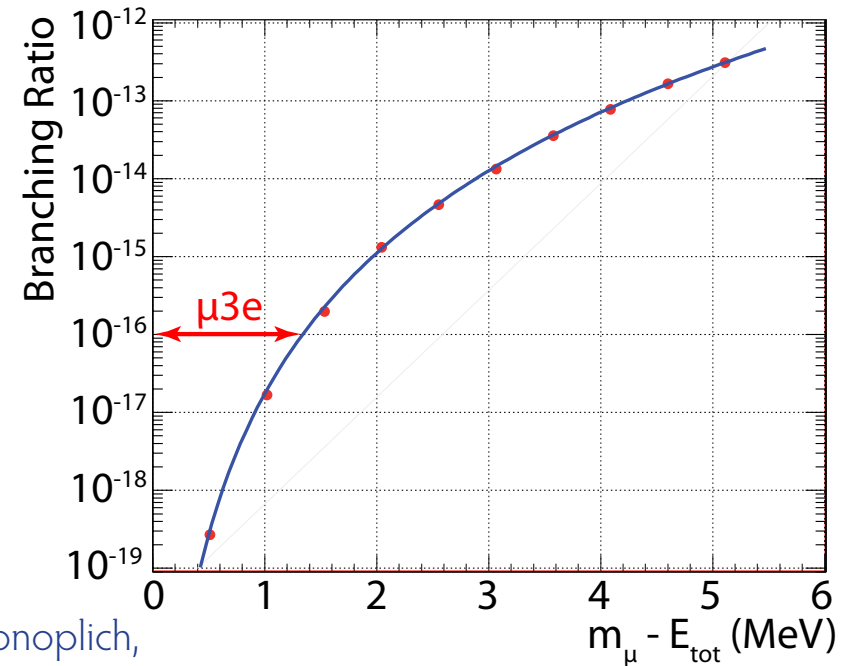


(R. M. Djilkibaev, R. V. Konoplich,
Phys.Rev. D79 (2009) 073004)




2 Billion Muon Decays/s

50 ns, 1 Tesla field

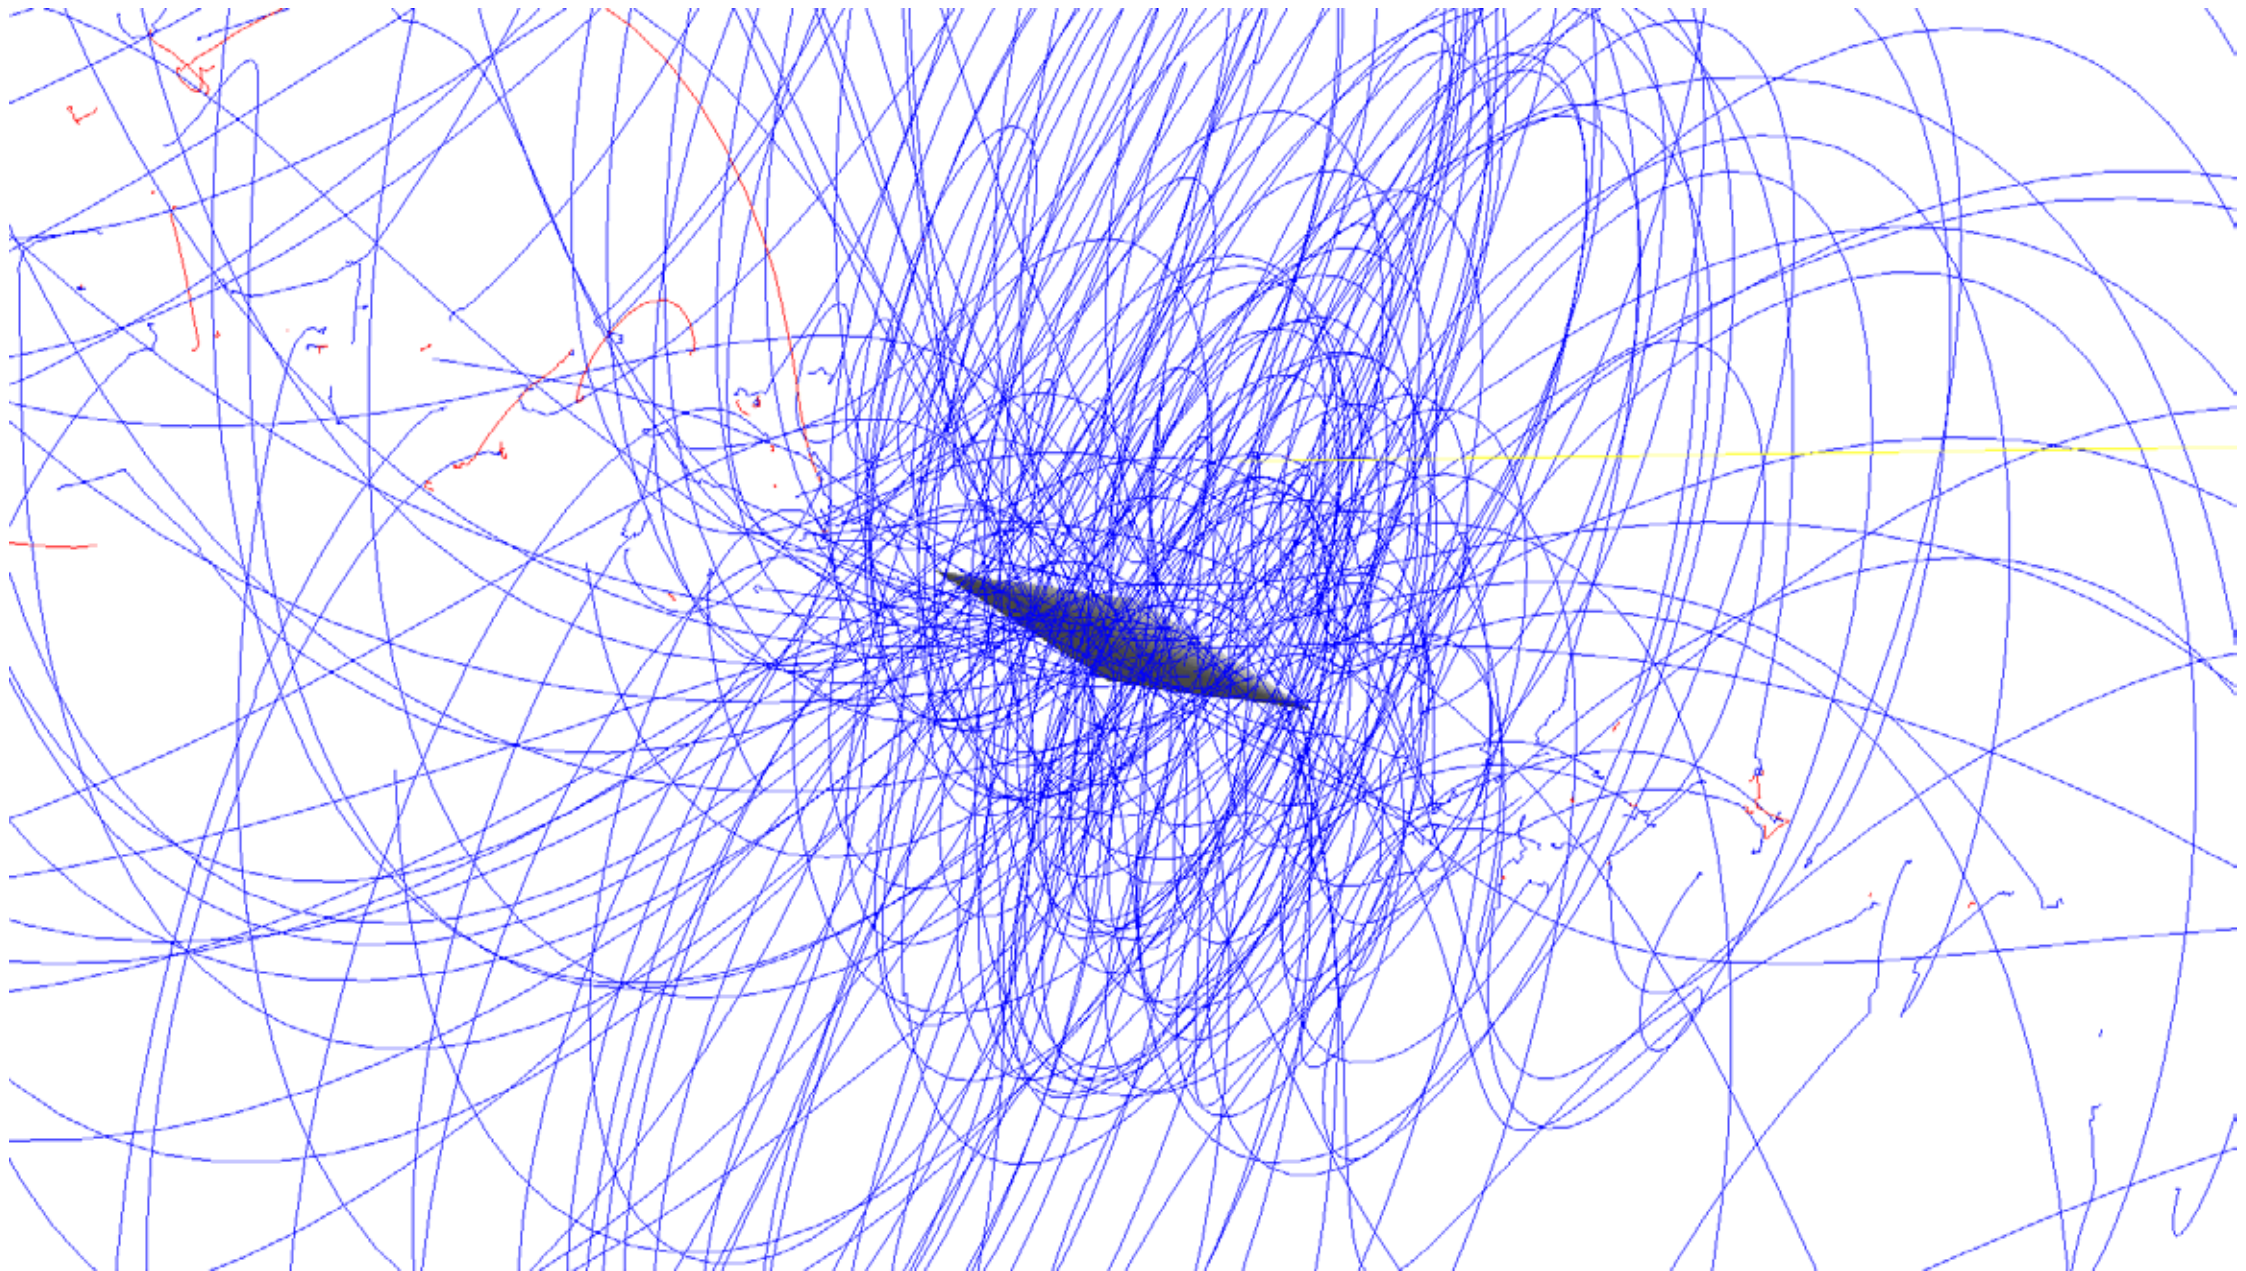



Detector Technology

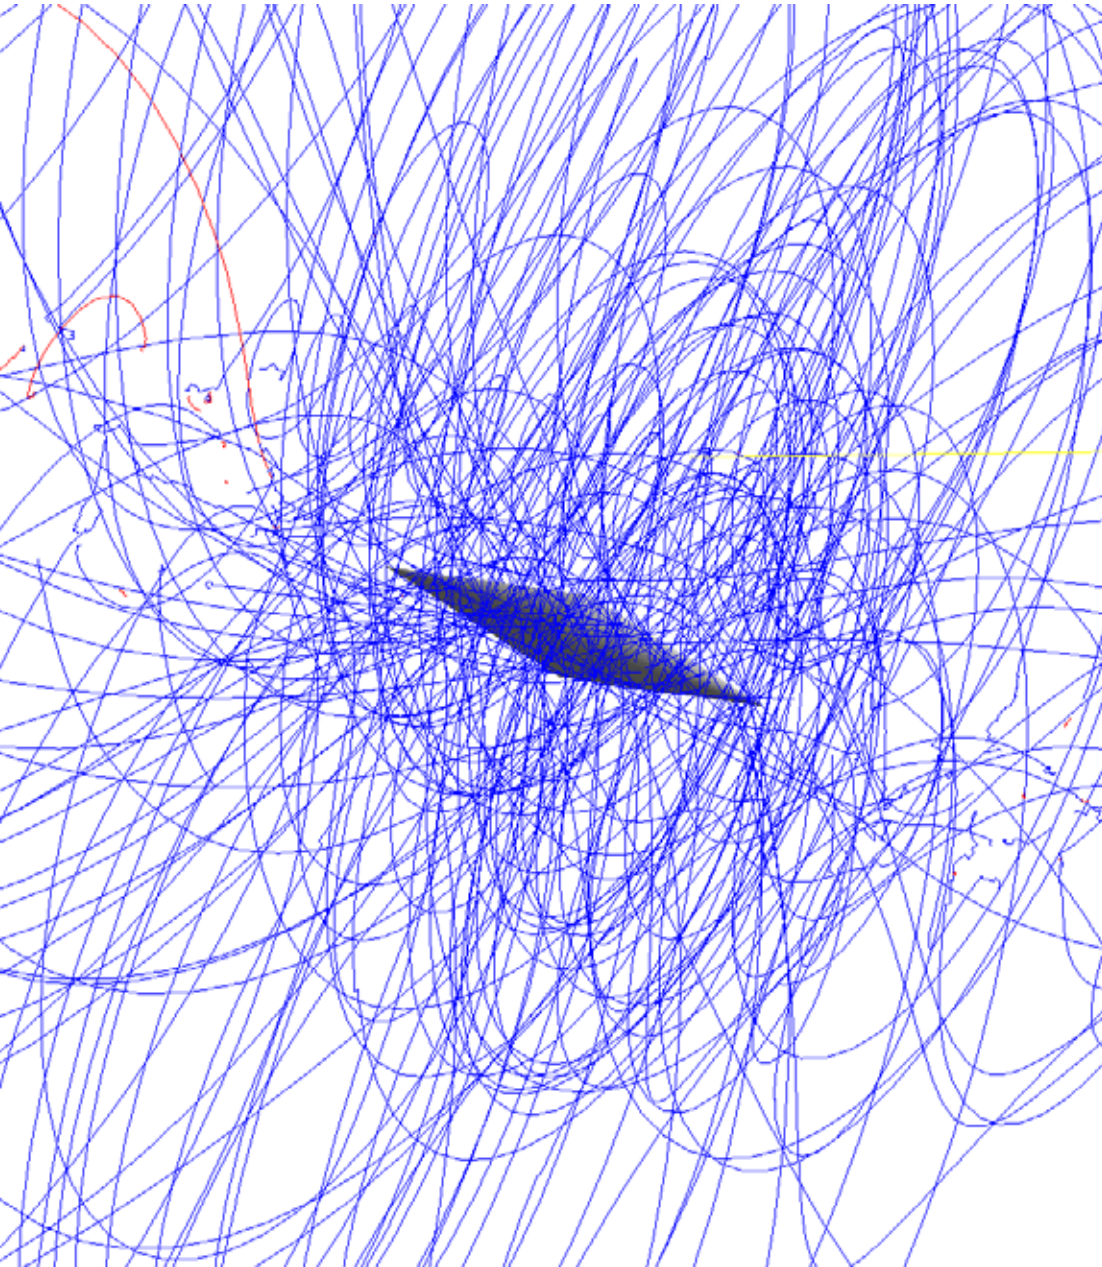


- High granularity (occupancy)
- Close to target (vertex resolution)
- 3D space points (reconstruction)
- Minimum material (momenta below 53 MeV/c)
- Gas detectors do not work (space charge, aging, 3D)
- Silicon strips do not work (material budget, 3D)
- Hybrid pixels (as in LHC) do not work (material budget)



Fast and thin sensors: HV-MAPS

High voltage monolithic active pixel sensors - Ivan Perić

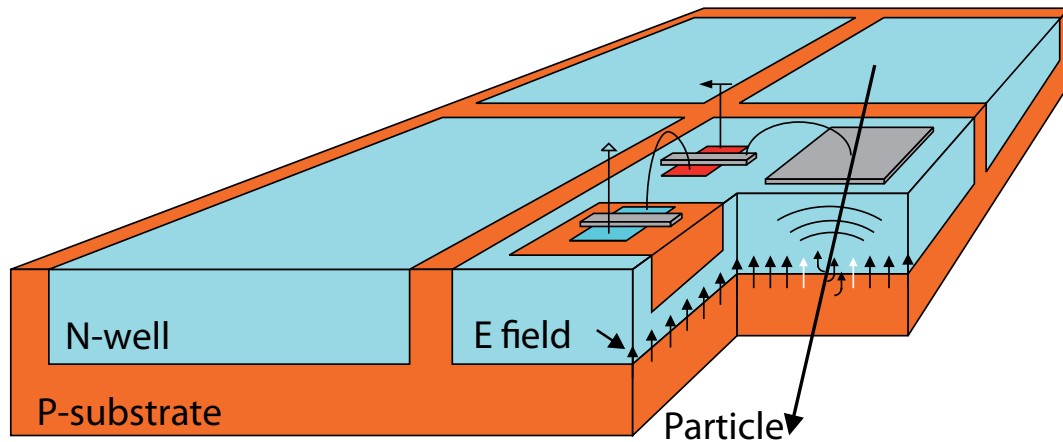



- Use a high voltage commercial process (automotive industry)
- Small active region, fast charge collection via drift
- Implement logic directly in N-well in the pixel - smart diode array
- Can be thinned down to $< 50 \mu\text{m}$
- Logic on chip: Output are zero-suppressed hit addresses and timestamps

(I.Perić, P. Fischer et al., NIM A 582 (2007) 876)




The MUIPX chip prototypes


MUIPX2



MUIPX6

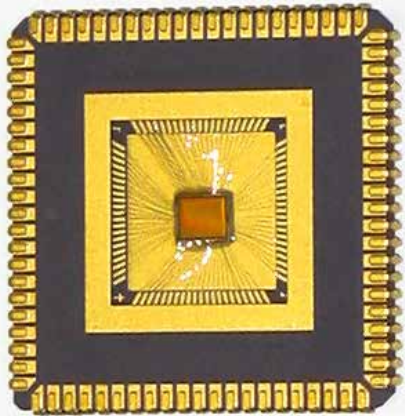

MUIPX4

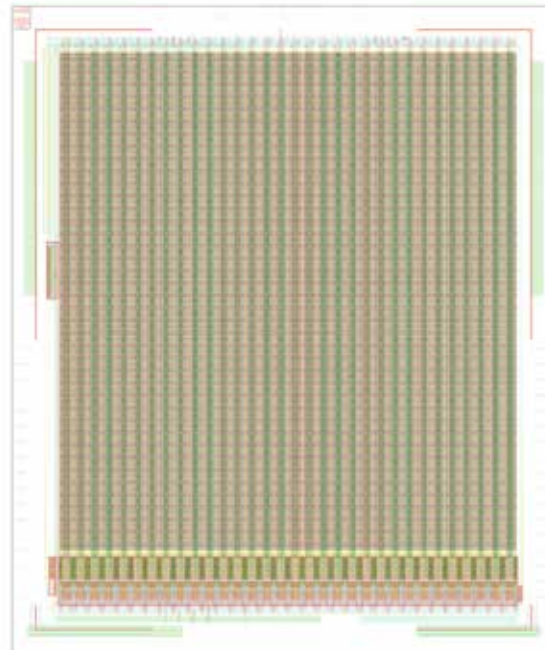

HV-MAPS chips: AMS 180 nm HV-CMOS

- 5 generations of prototypes
- Current generation:
MUIPX6
40 x 32 pixels
80 x 103 μm pixel size
9.4 mm^2 active area
- Test beam results with **MUIPX4**
- **MUIPX7** (August submission) will have all features of final sensor - arrived yesterday
- Left to do: Scale to 2 x 2 cm^2




Test beam at DESY





Position Resolution


Position resolution given by pixel size

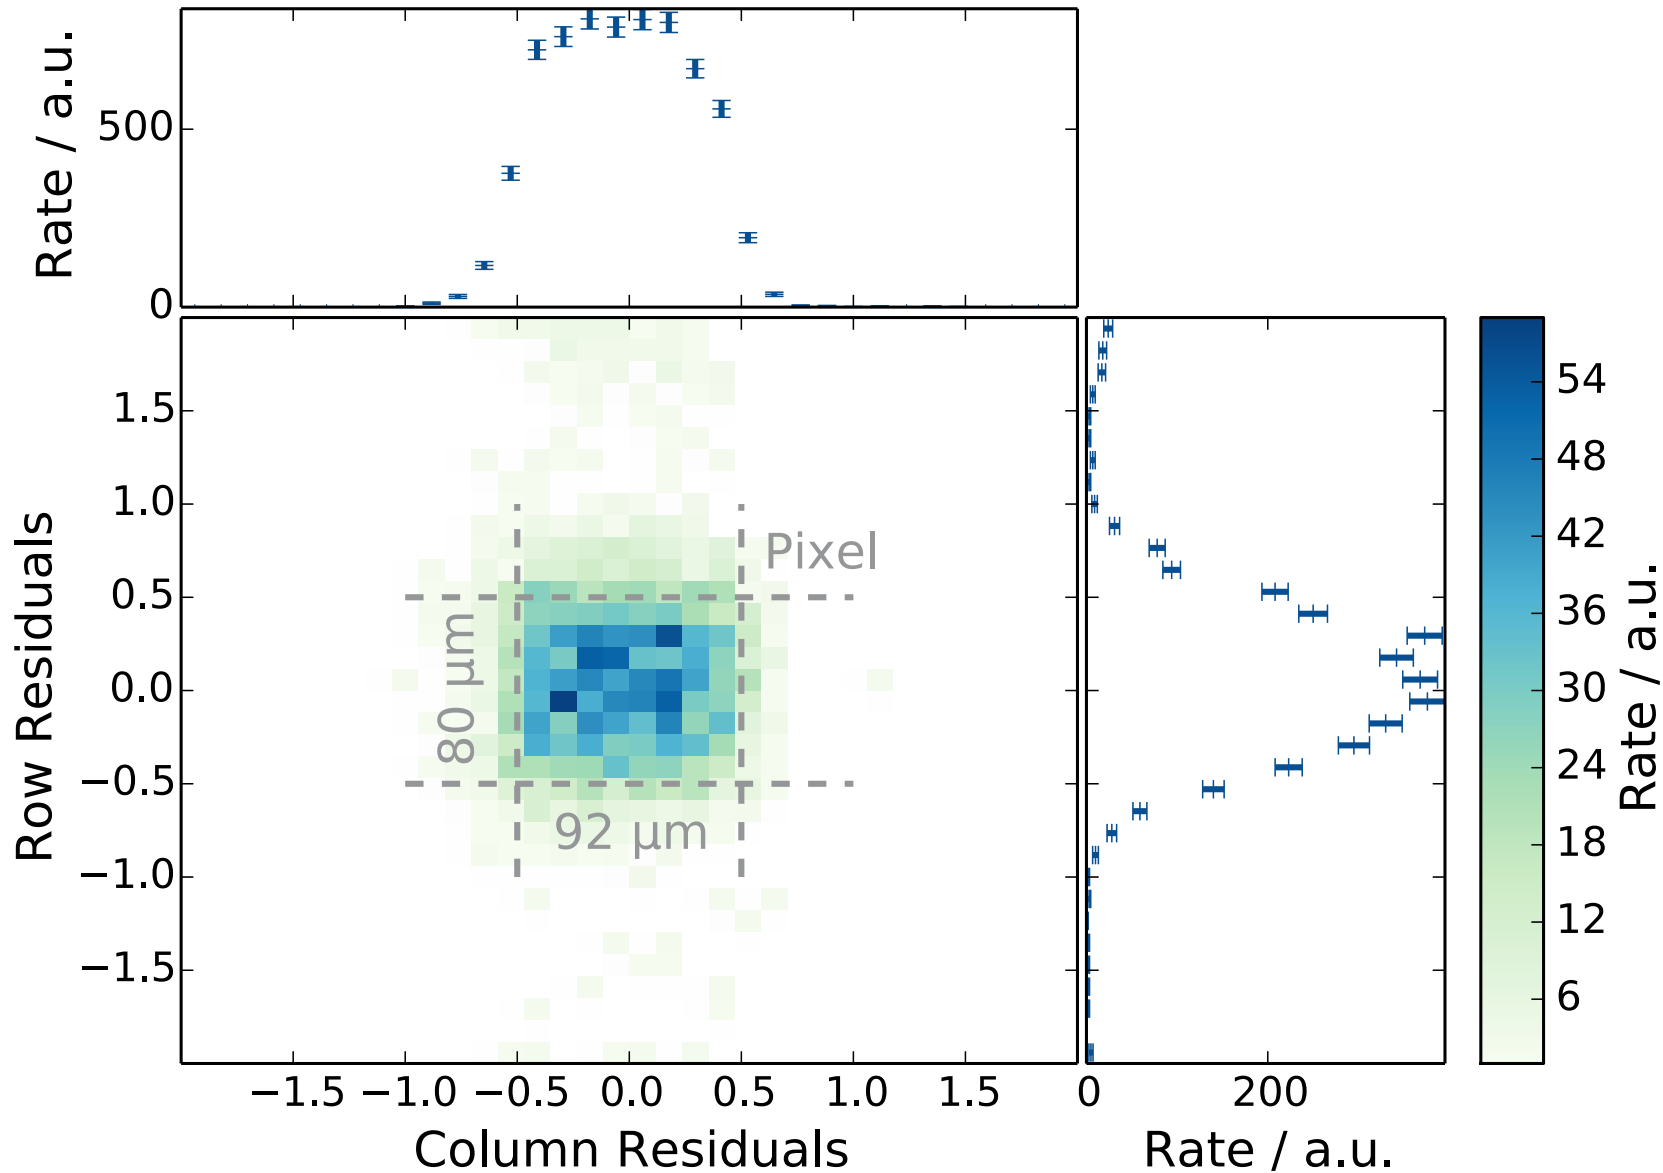




Efficiency

Hit efficiency above 99% without tuning

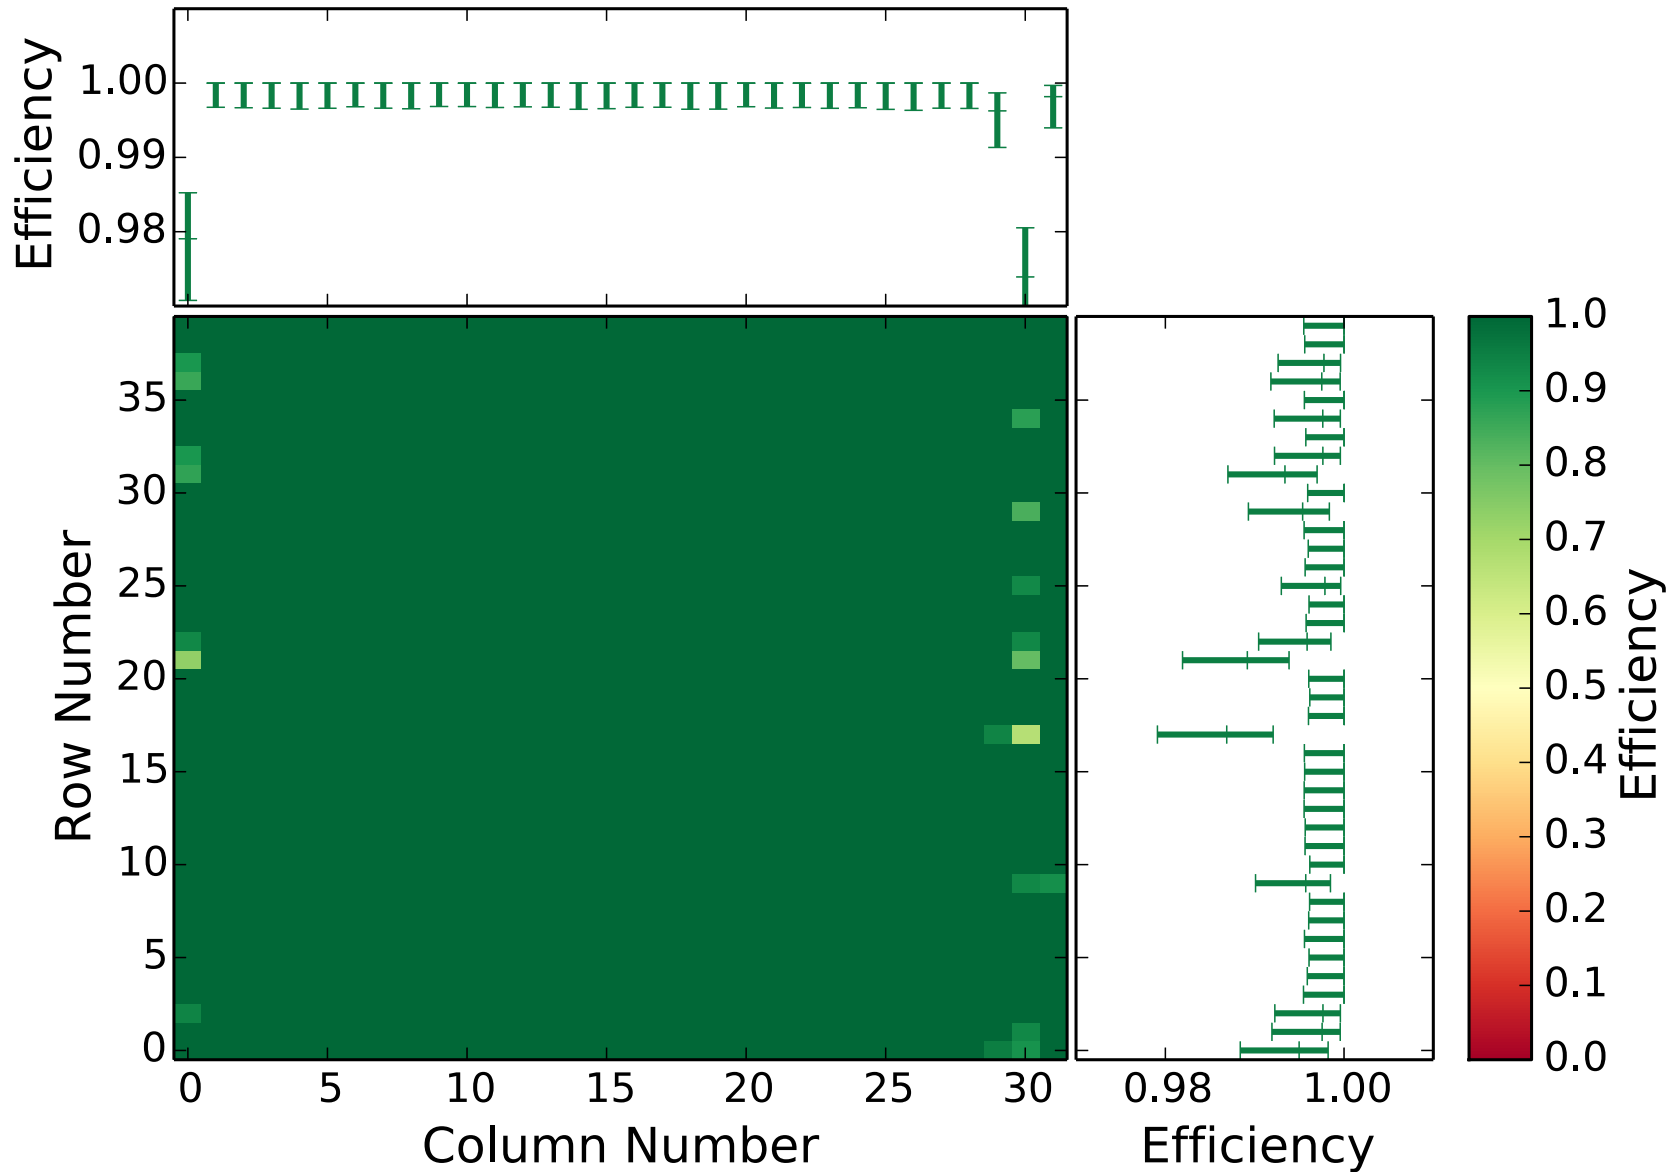




Time resolution

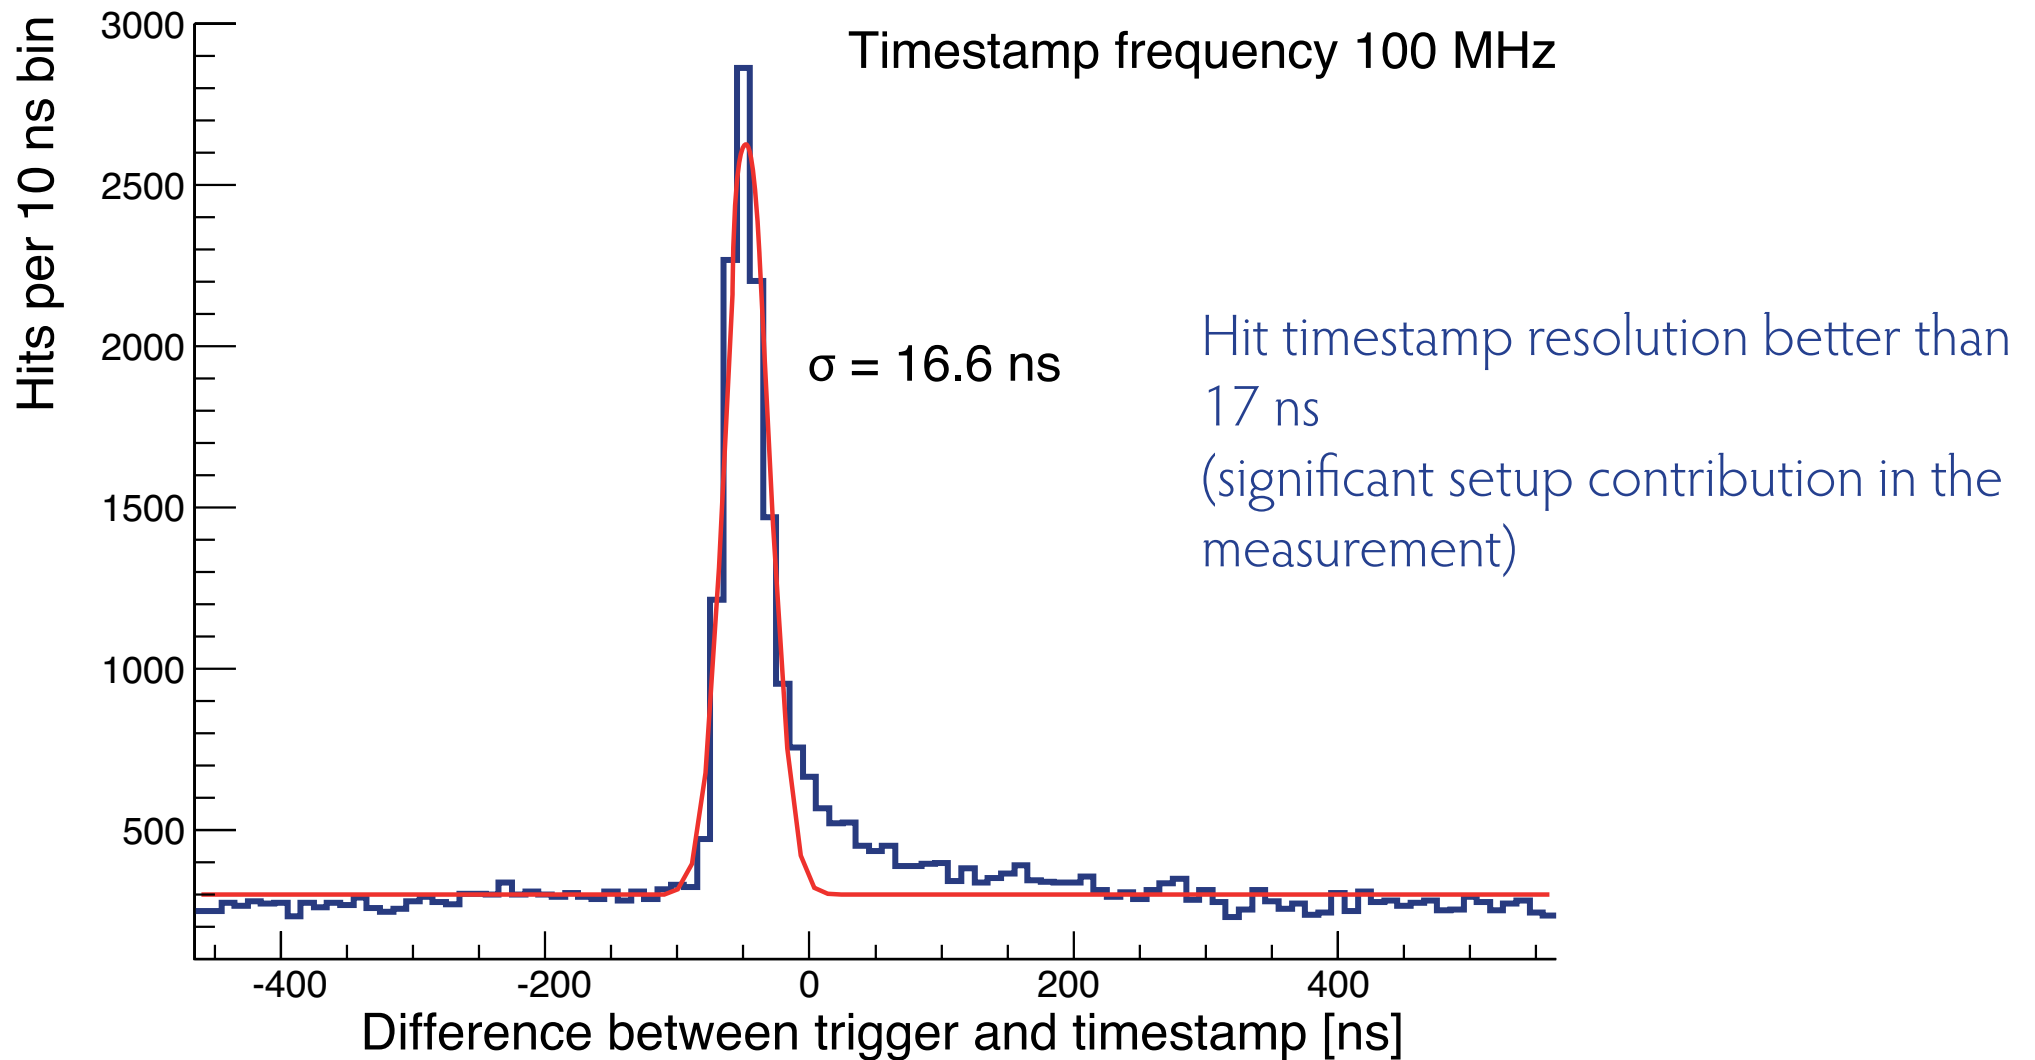


Mupix Telescope

Built our own pixel telescope

- Four planes of thin Mupix sensors
- Fast readout into PCIe FPGA cards
- Currently about 1 MHz hits/plane possible
- Tested at DESY and PSI

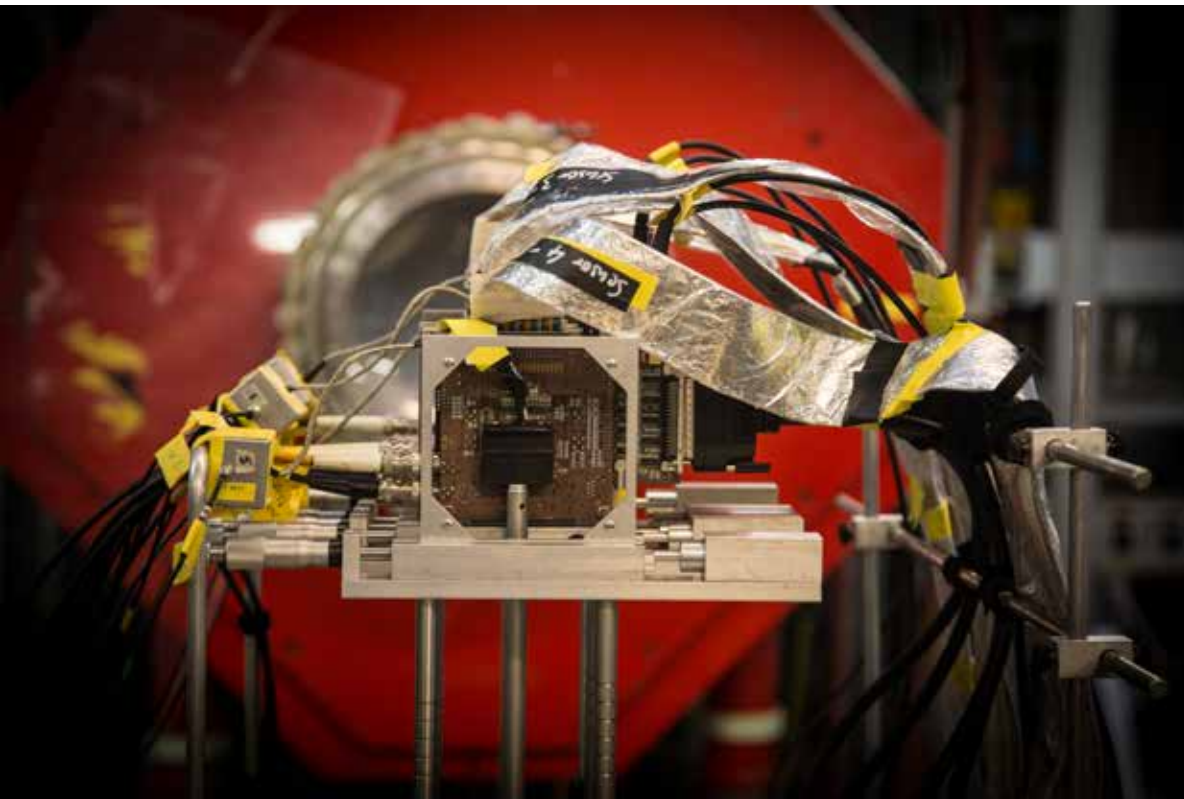



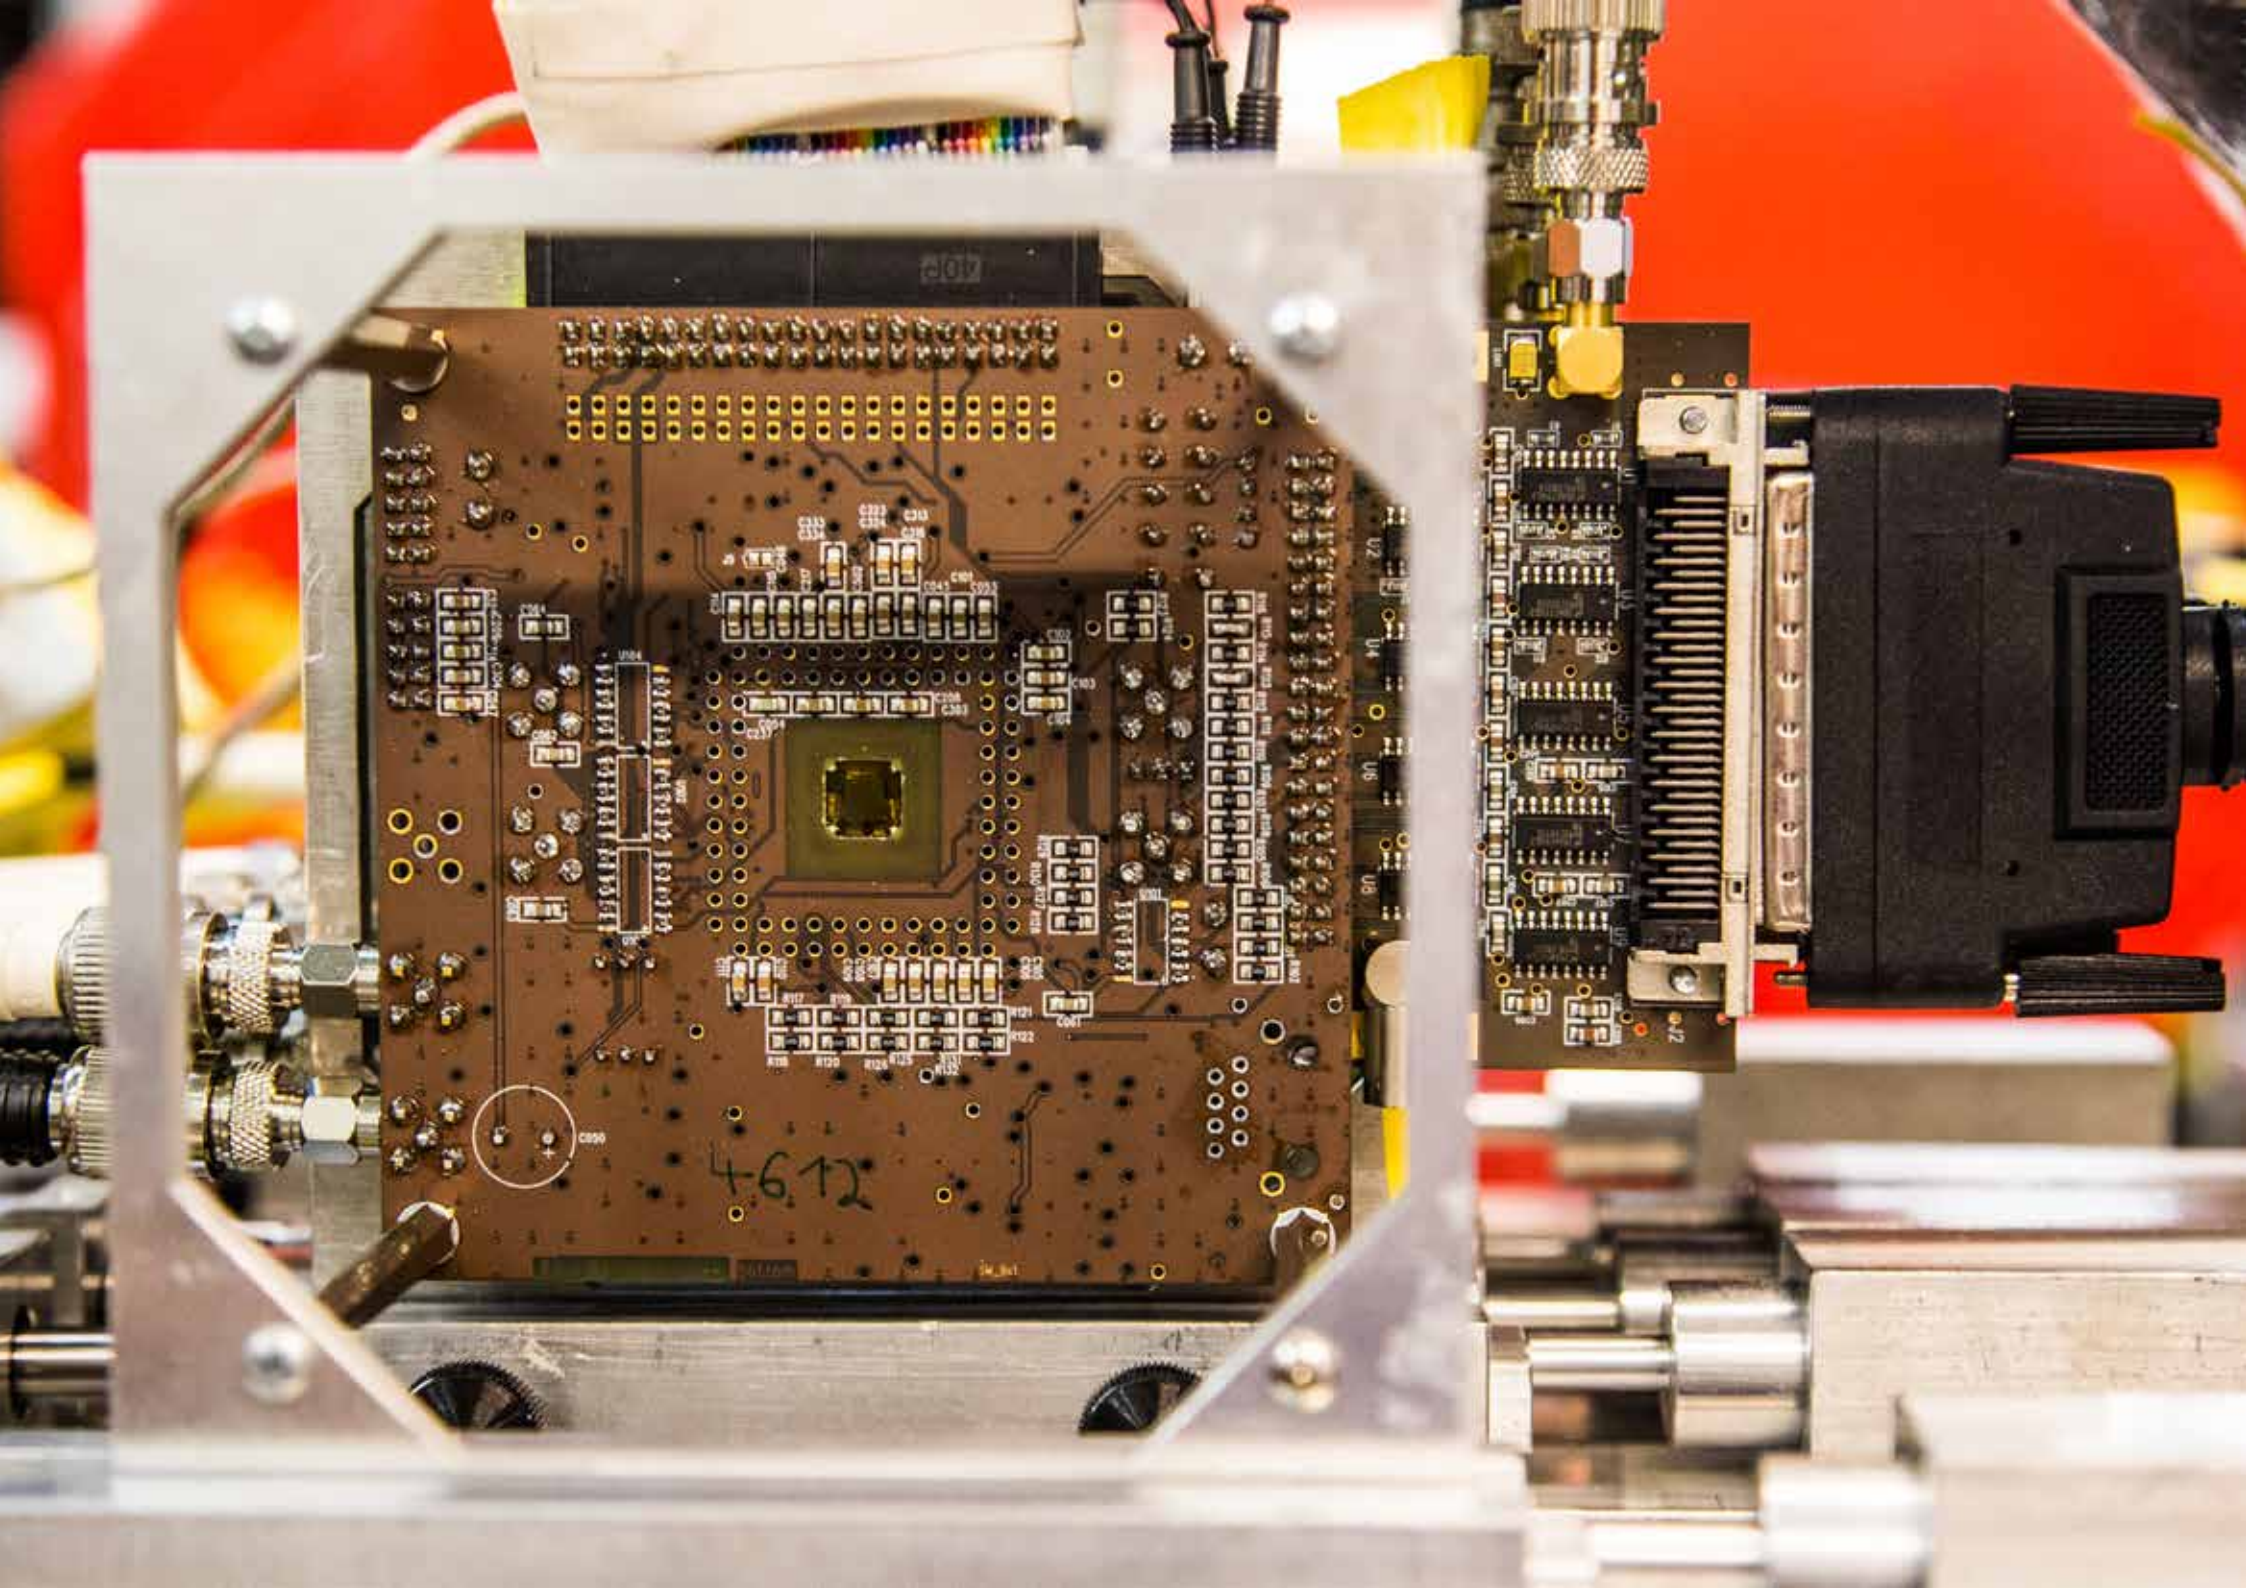

4672

4672

Pin header connections at the top of the board, including a 24-pin header and a 16-pin header.

Large multi-pin connector on the right side, connected to a black device. The connector has 36 pins and is labeled with 'U12' and 'U13'.

IC component on the left side of the board, labeled with 'U1' and 'U2'.

IC component on the left side of the board, labeled with 'U1' and 'U2'.

Small circular component labeled 'C99' on the left side of the board.

Small circular component labeled 'C99' on the left side of the board.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.


IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.

IC component in the center-right area of the board, labeled with 'U3' and 'U4'.




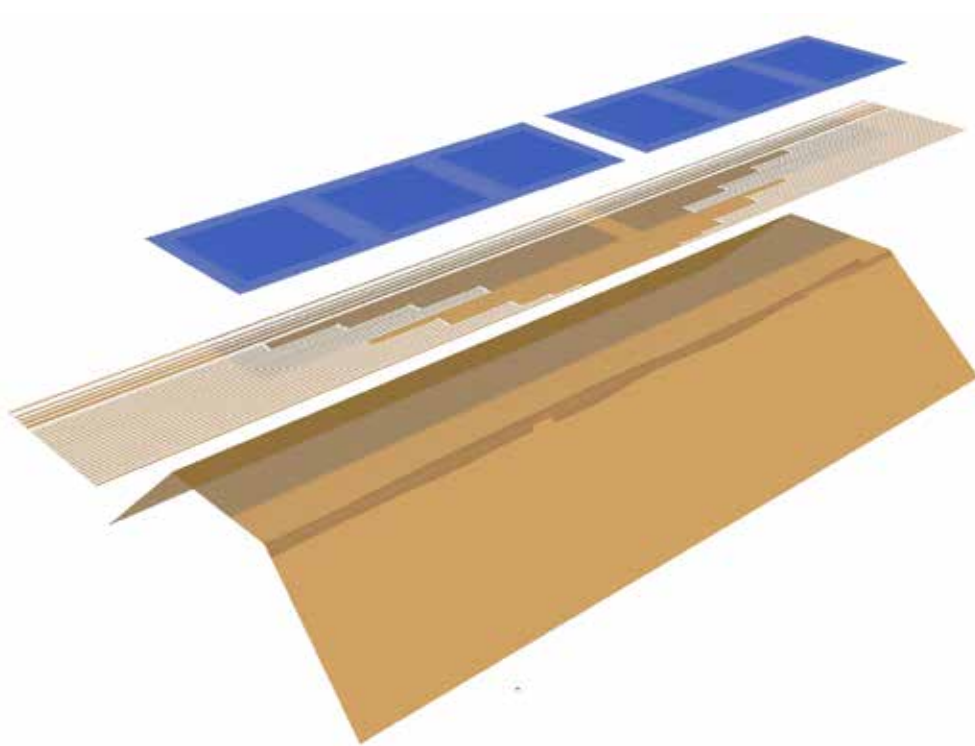

- 50 μm silicon
- 25 μm Kapton™ flexprint with aluminium traces
- 25 μm Kapton™ frame as support
- Less than 1‰ of a radiation length per layer







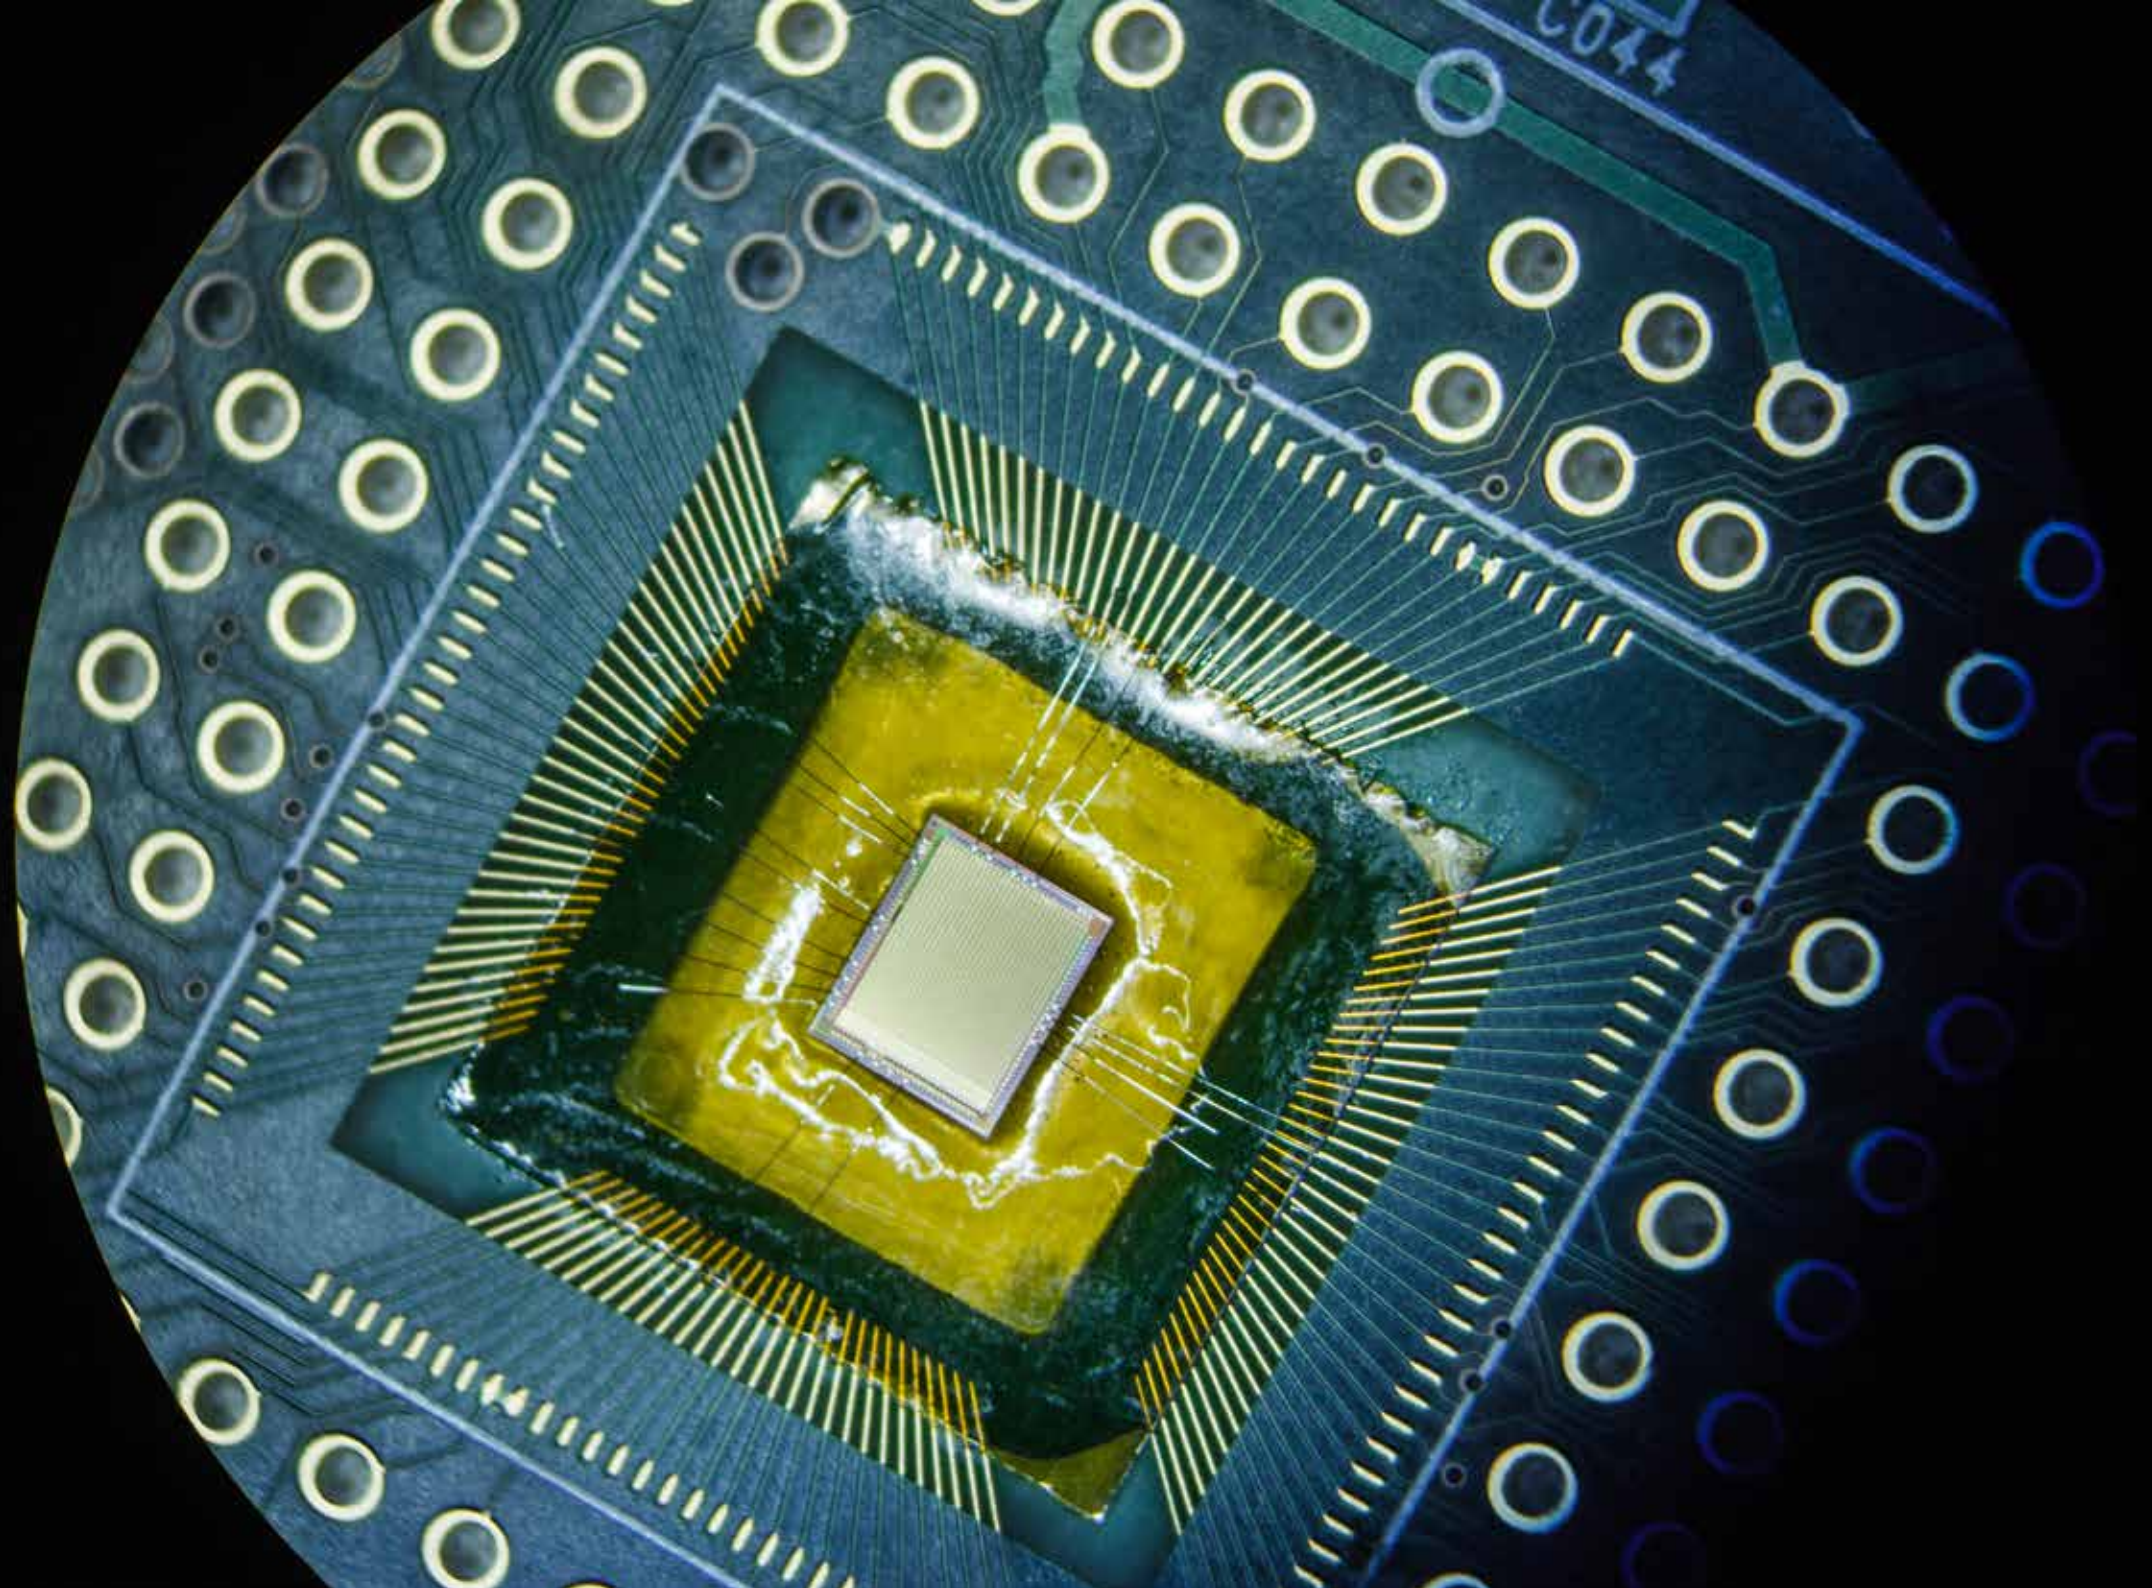

Cooling

- Add no material:
Cool with **gaseous Helium**
(low scattering, high mobility)
- $\sim 150 \text{ mW/cm}^2$ - total 2 kW
- Simulations: Need \sim **several m/s flow**


- Full scale heatable prototype built
- 36 cm active length
- No visible vibrations

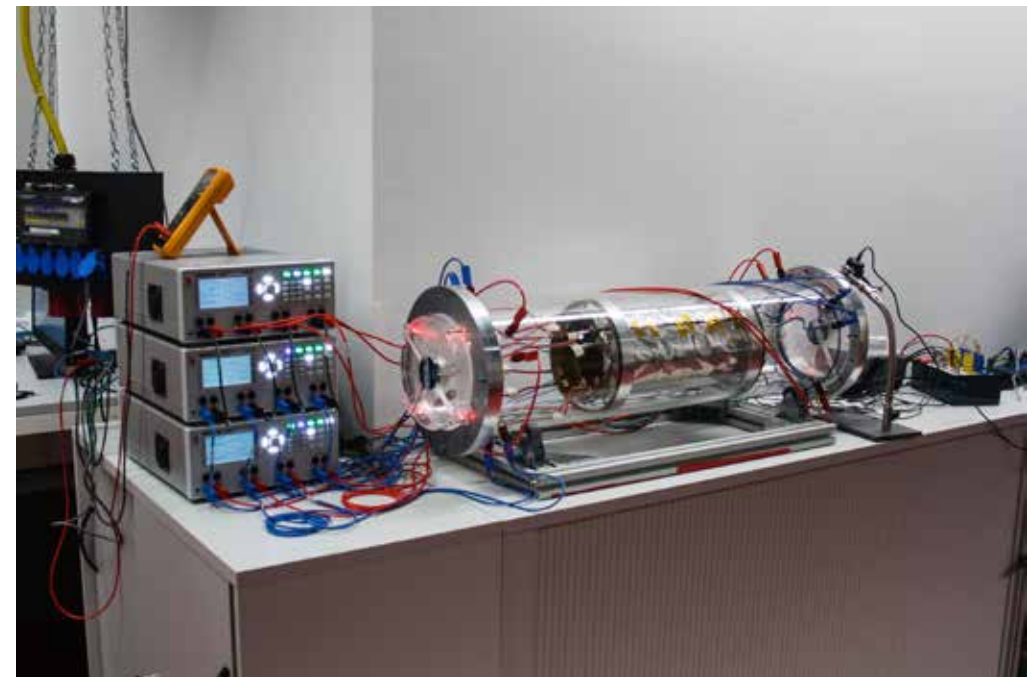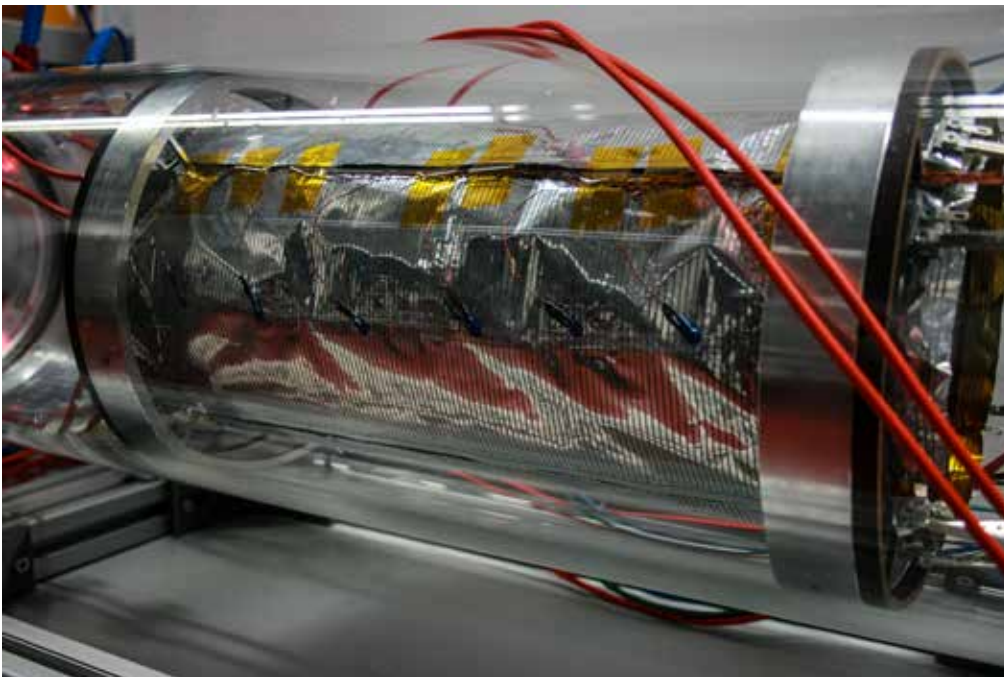




Cooling tests



- Can keep gradients under 30°C over 36 cm with helium cooling
- Can add local cooling

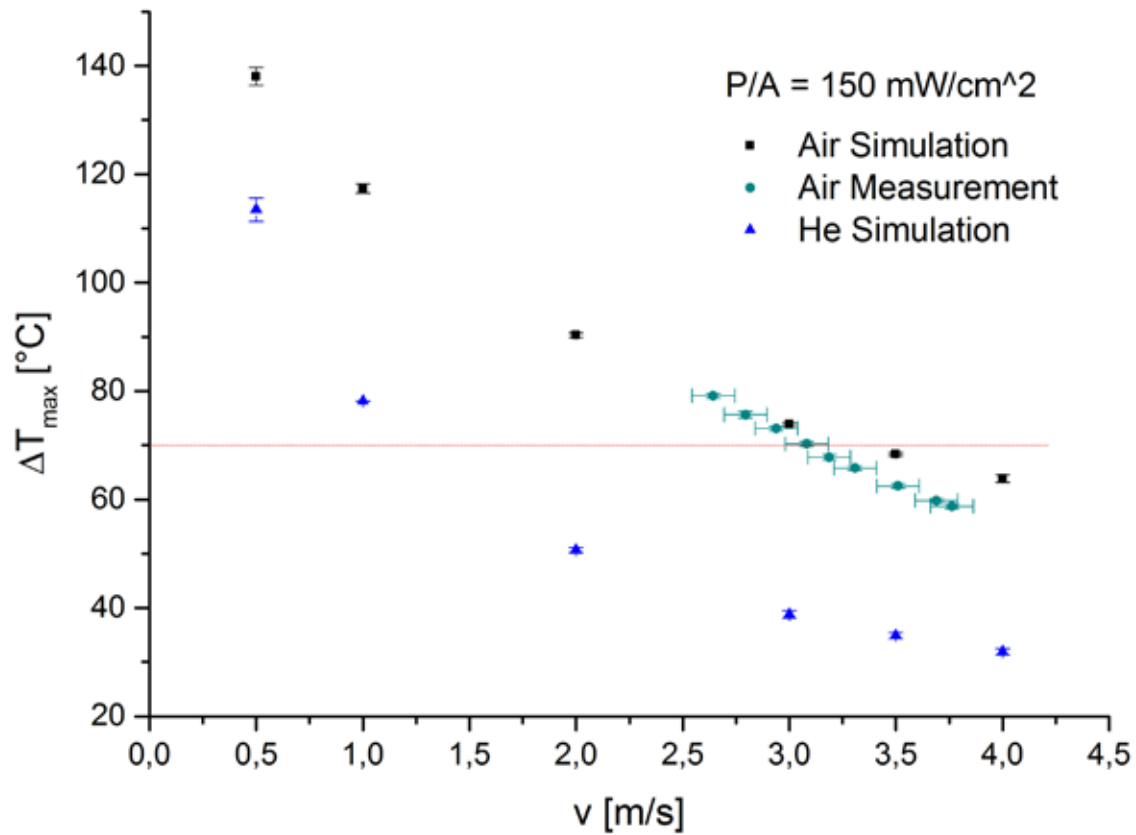

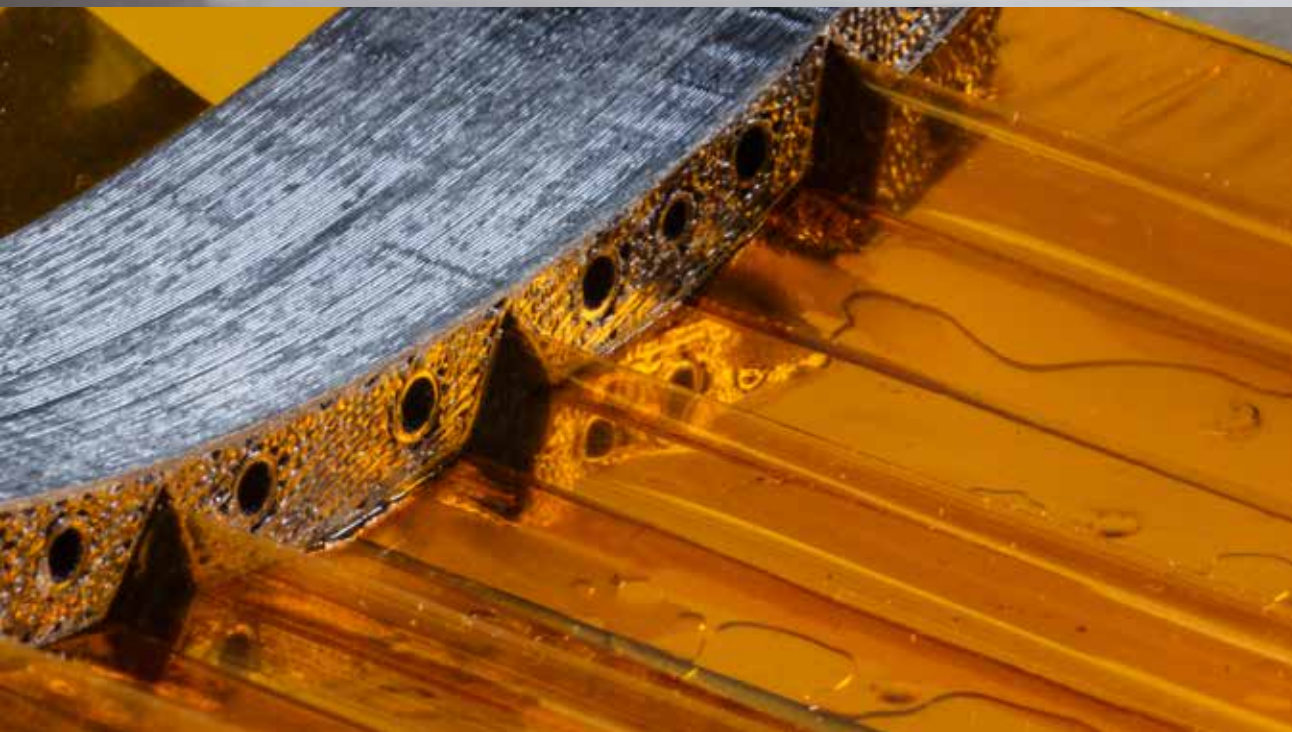




Cooling tests

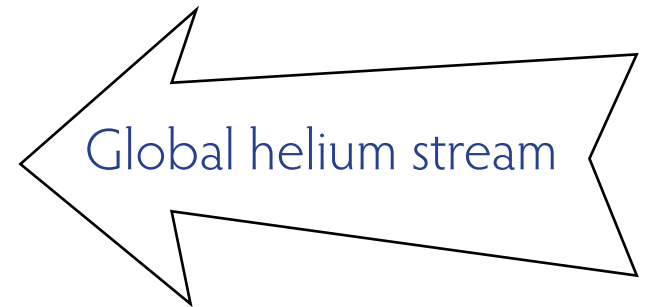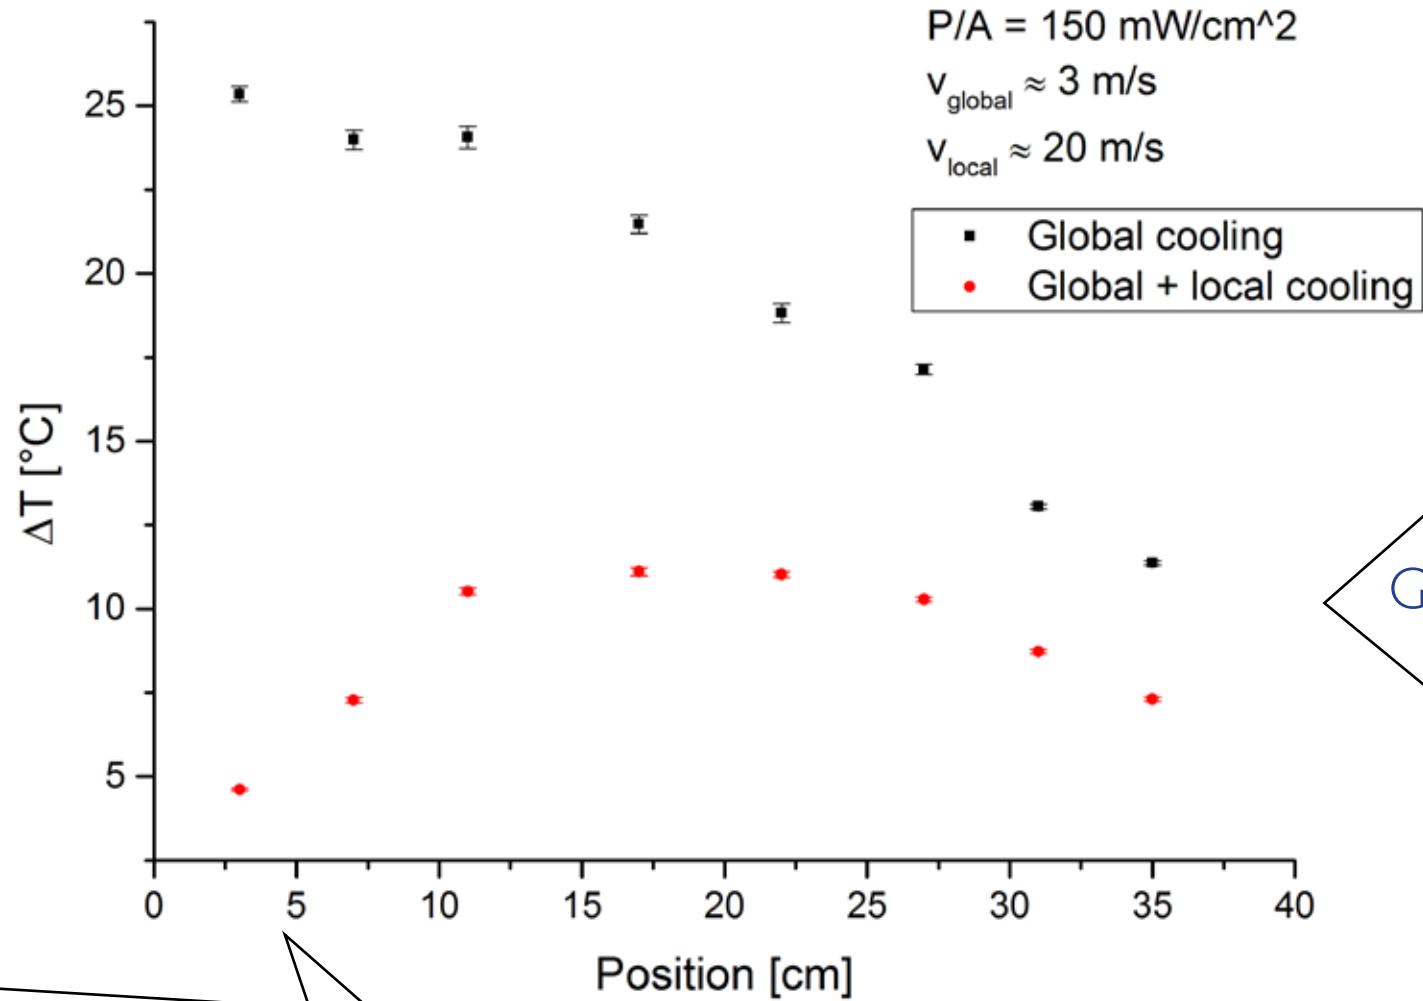



Momentum measurement

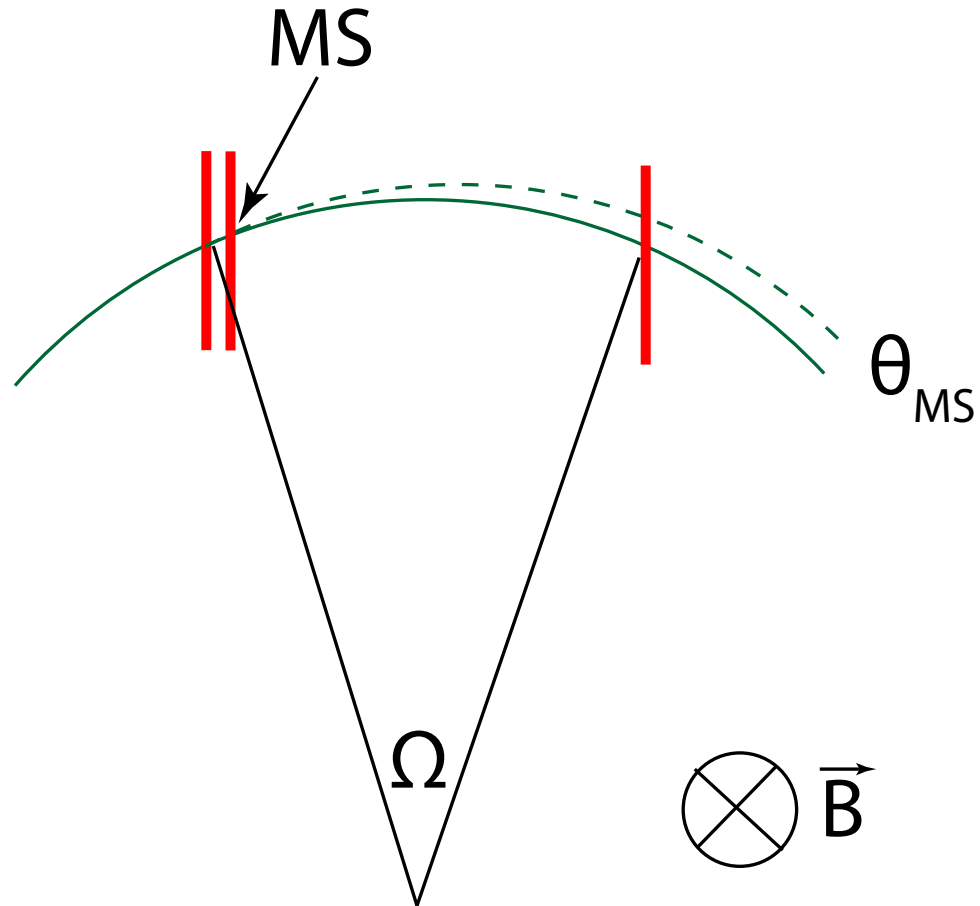


- 1 T magnetic field
- Resolution dominated by **multiple scattering**
- Momentum resolution to first order:


$$\sigma_{P/P} \sim \theta_{MS}/\Omega$$

- Precision requires large lever arm (large bending angle Ω) and low multiple scattering θ_{MS}


Precision vs. Acceptance

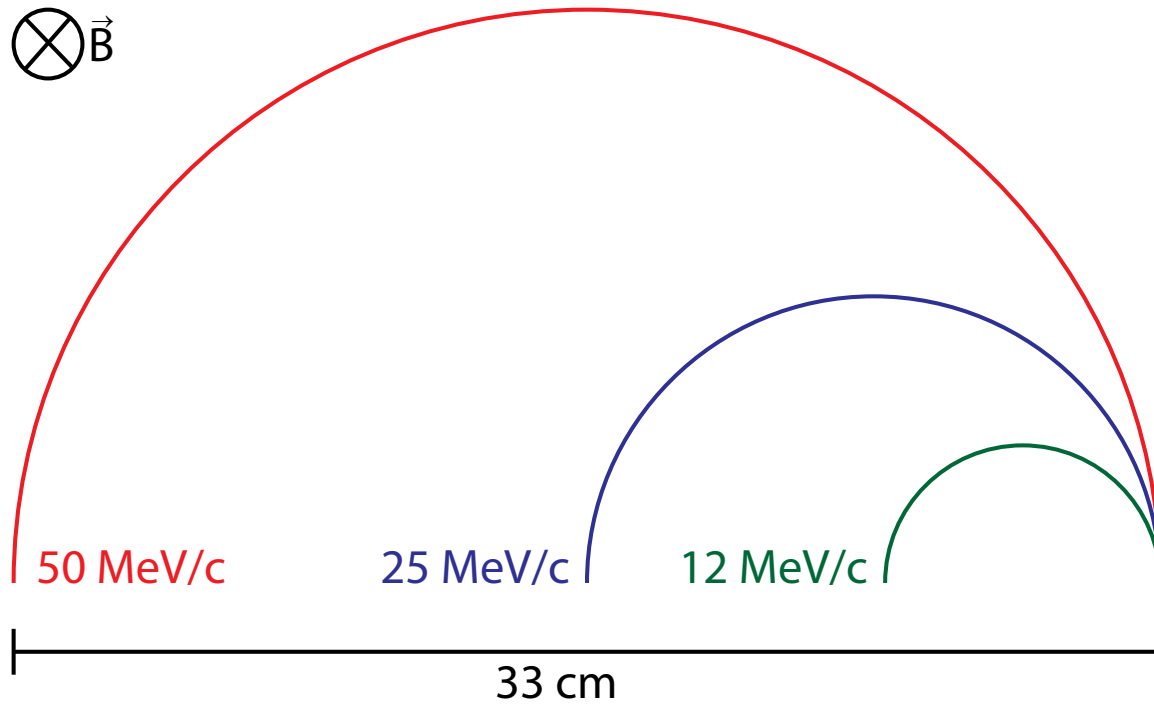


Precision vs. Acceptance

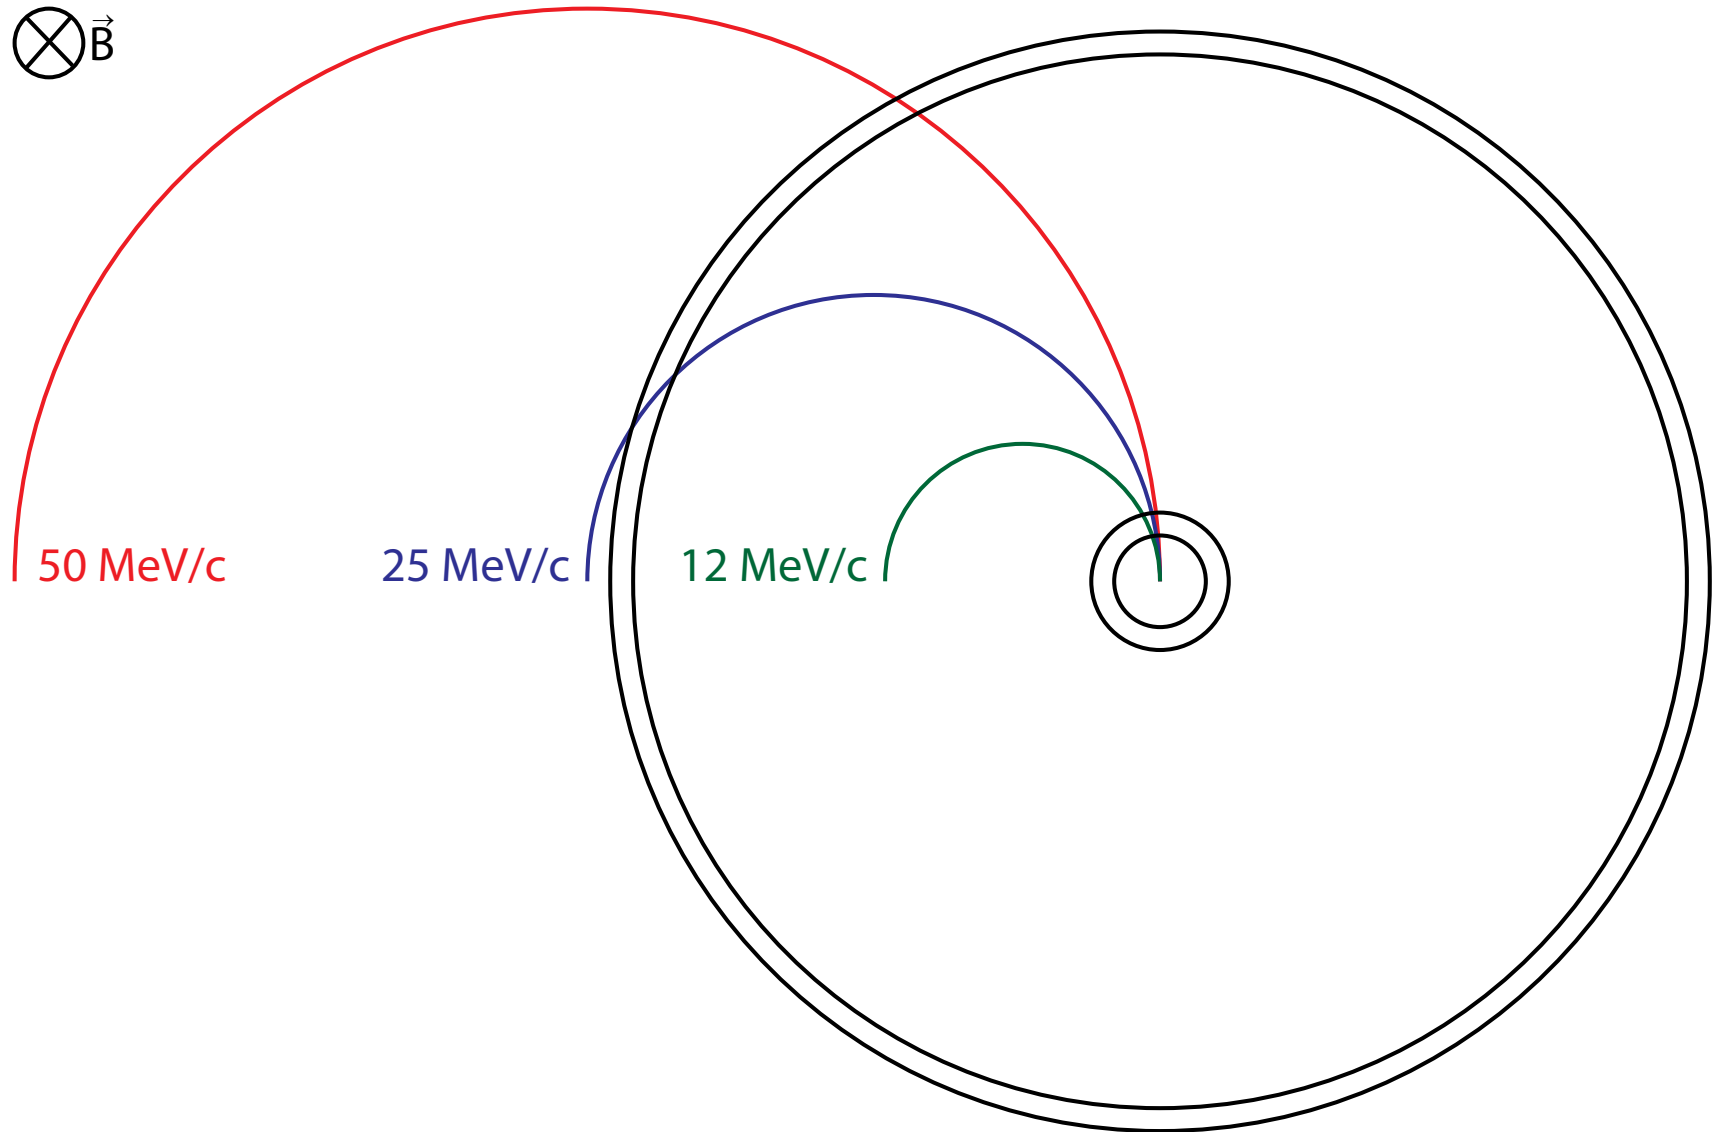



Precision vs. Acceptance

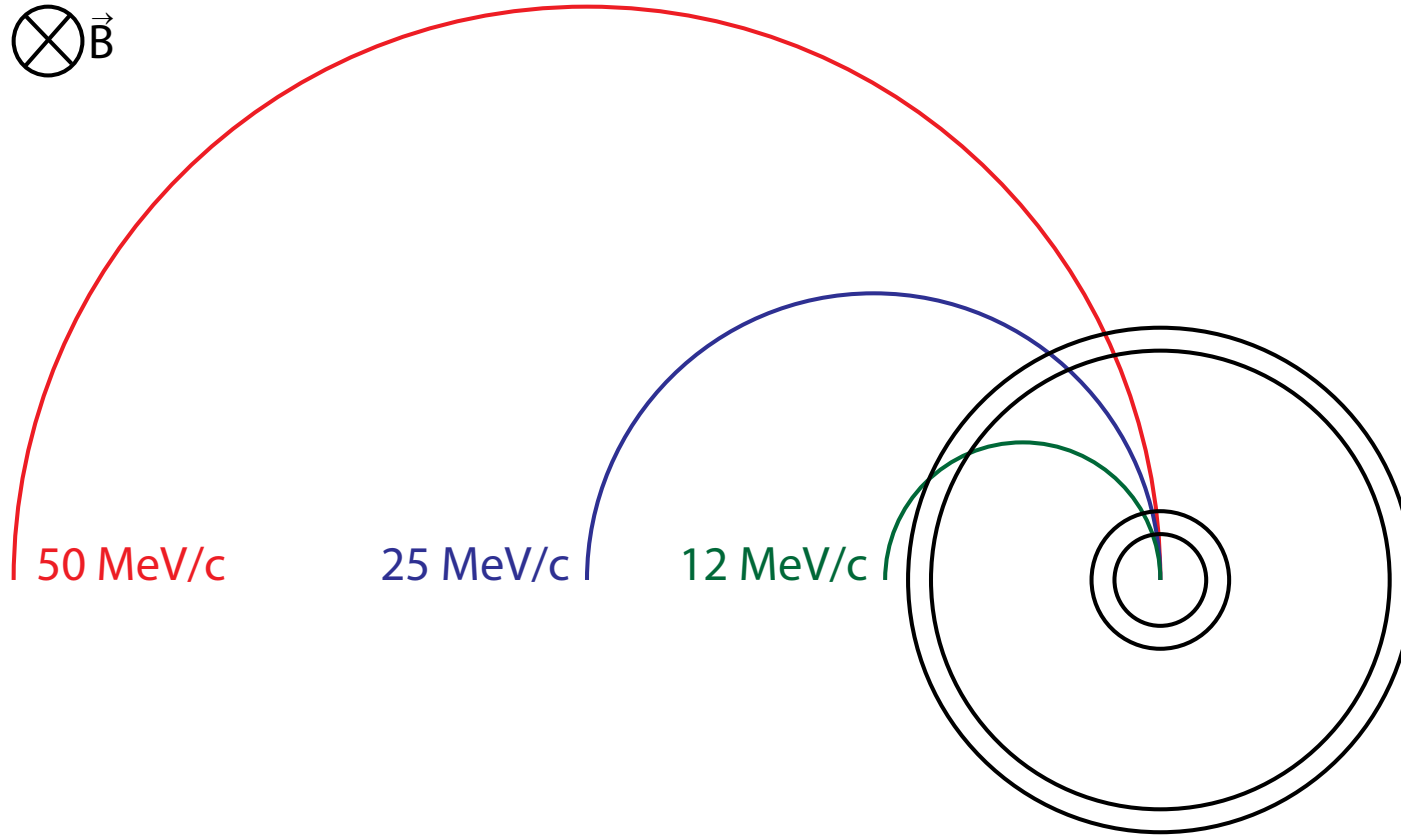

Precision vs. Acceptance

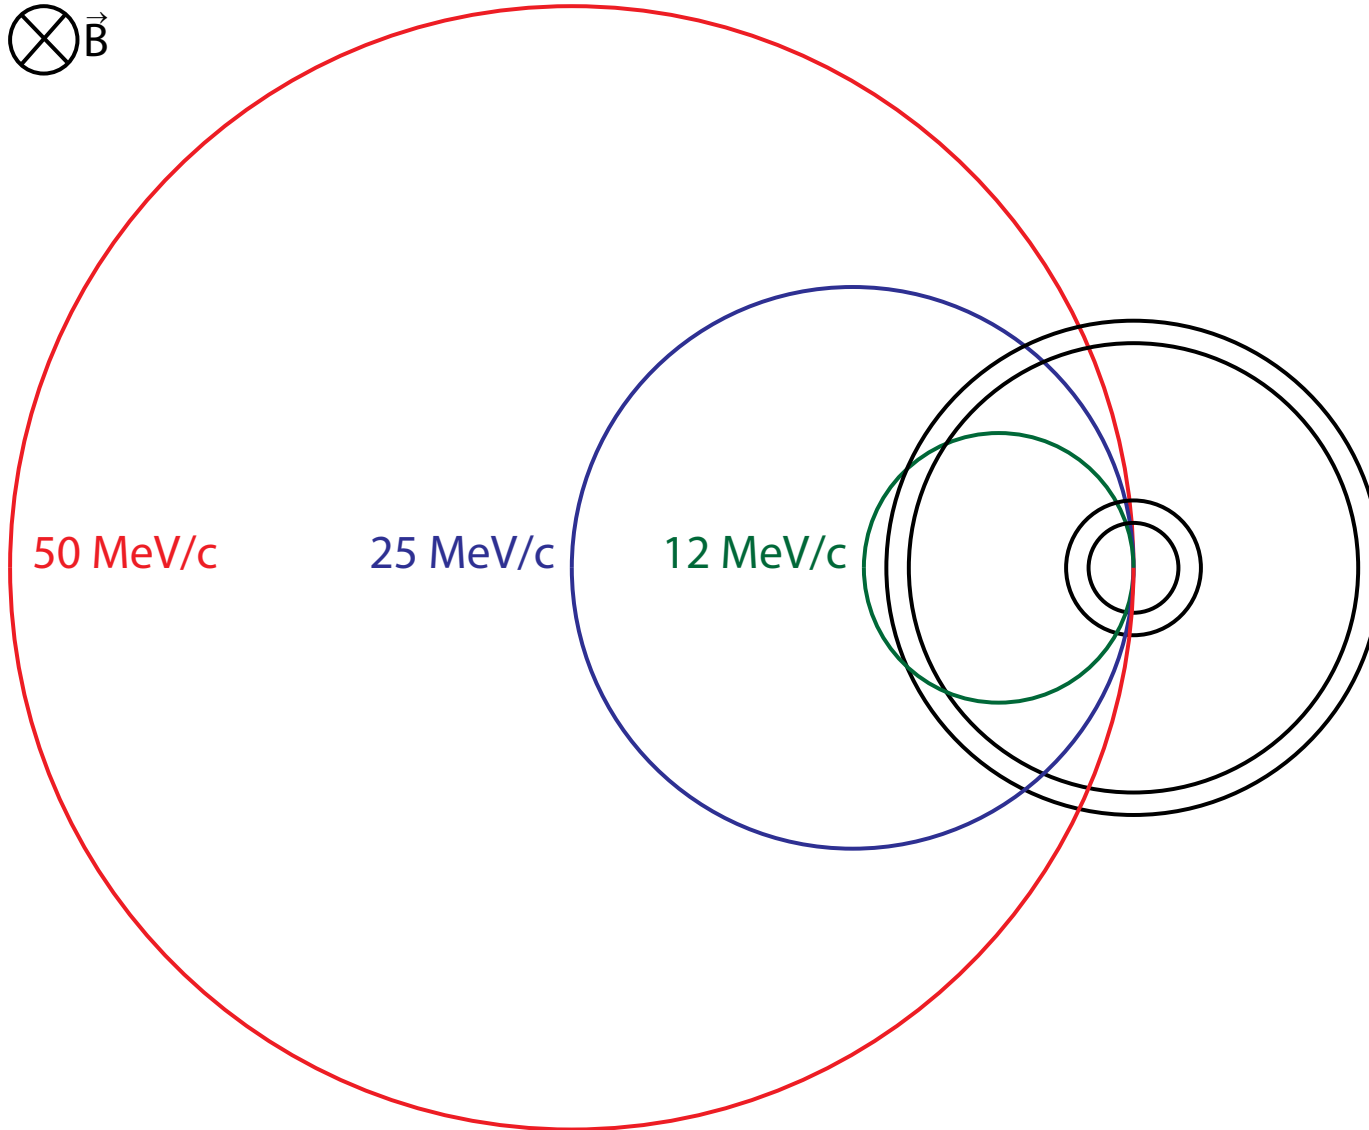



Precision vs. Acceptance

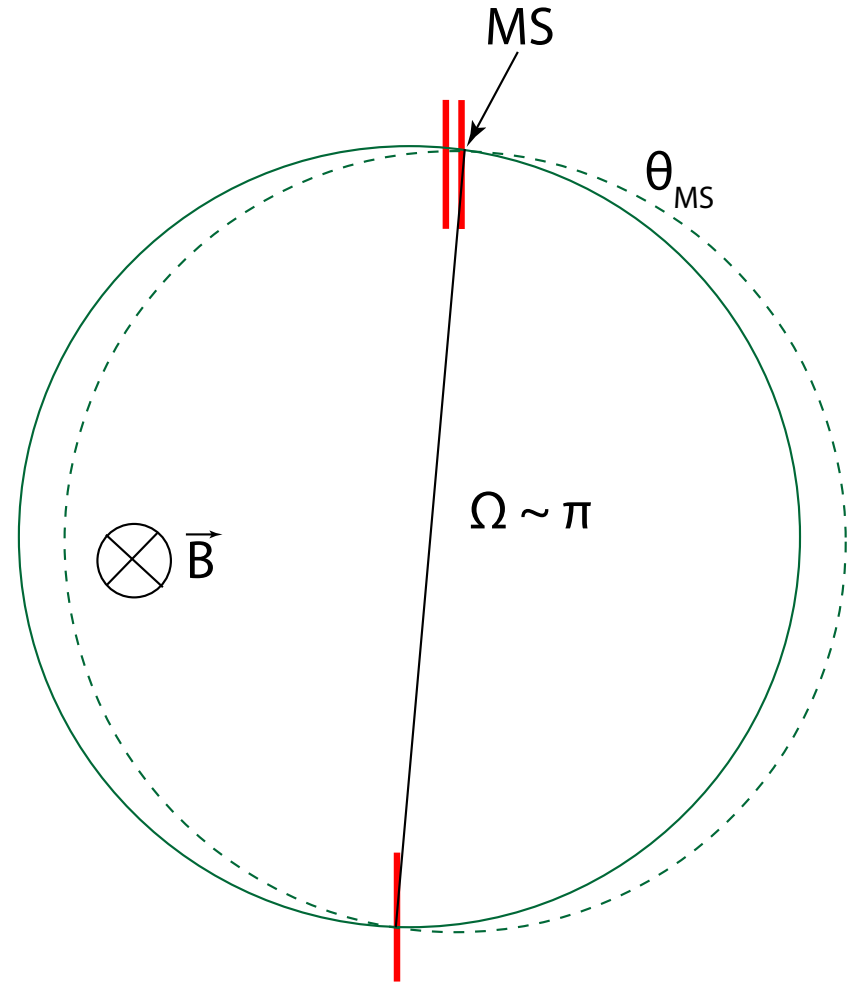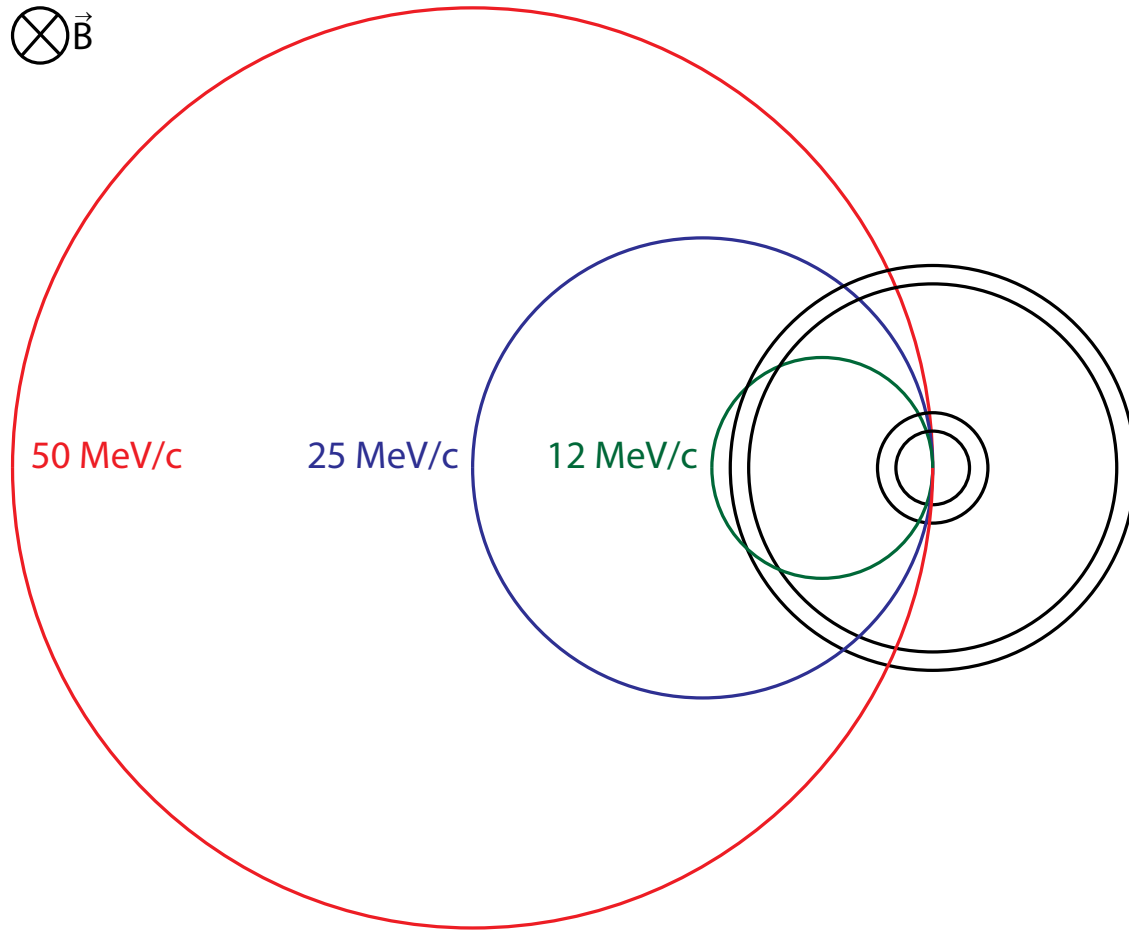



Detector Design


muon beam

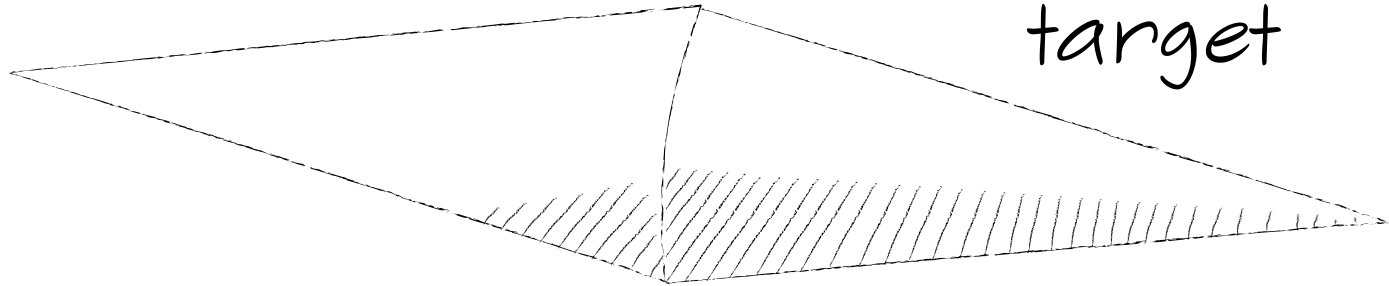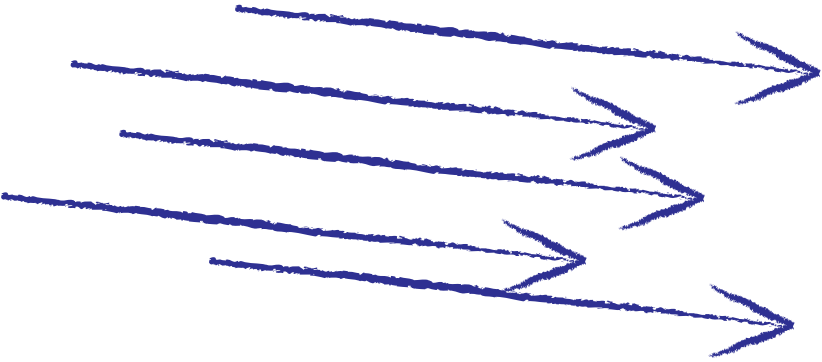

target




Detector Design

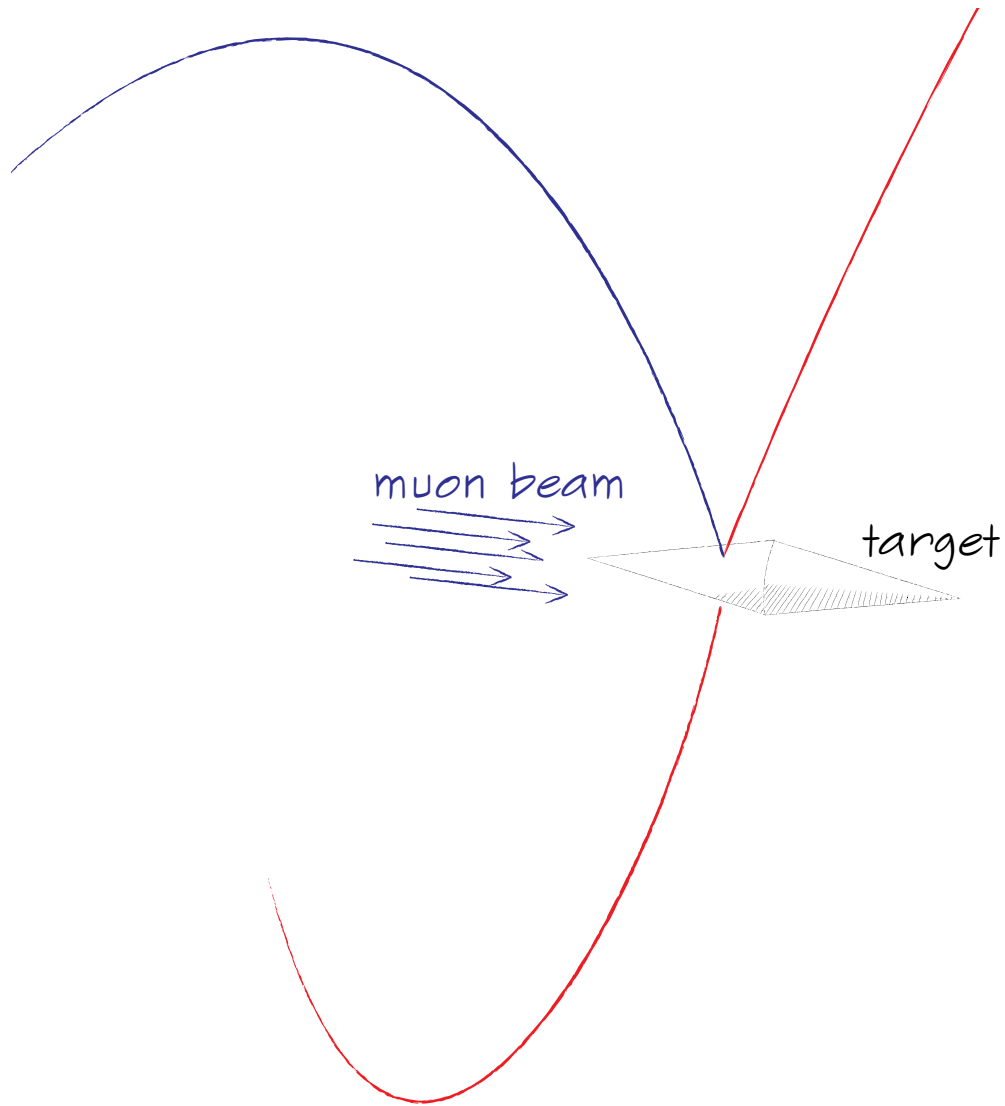




Detector Design

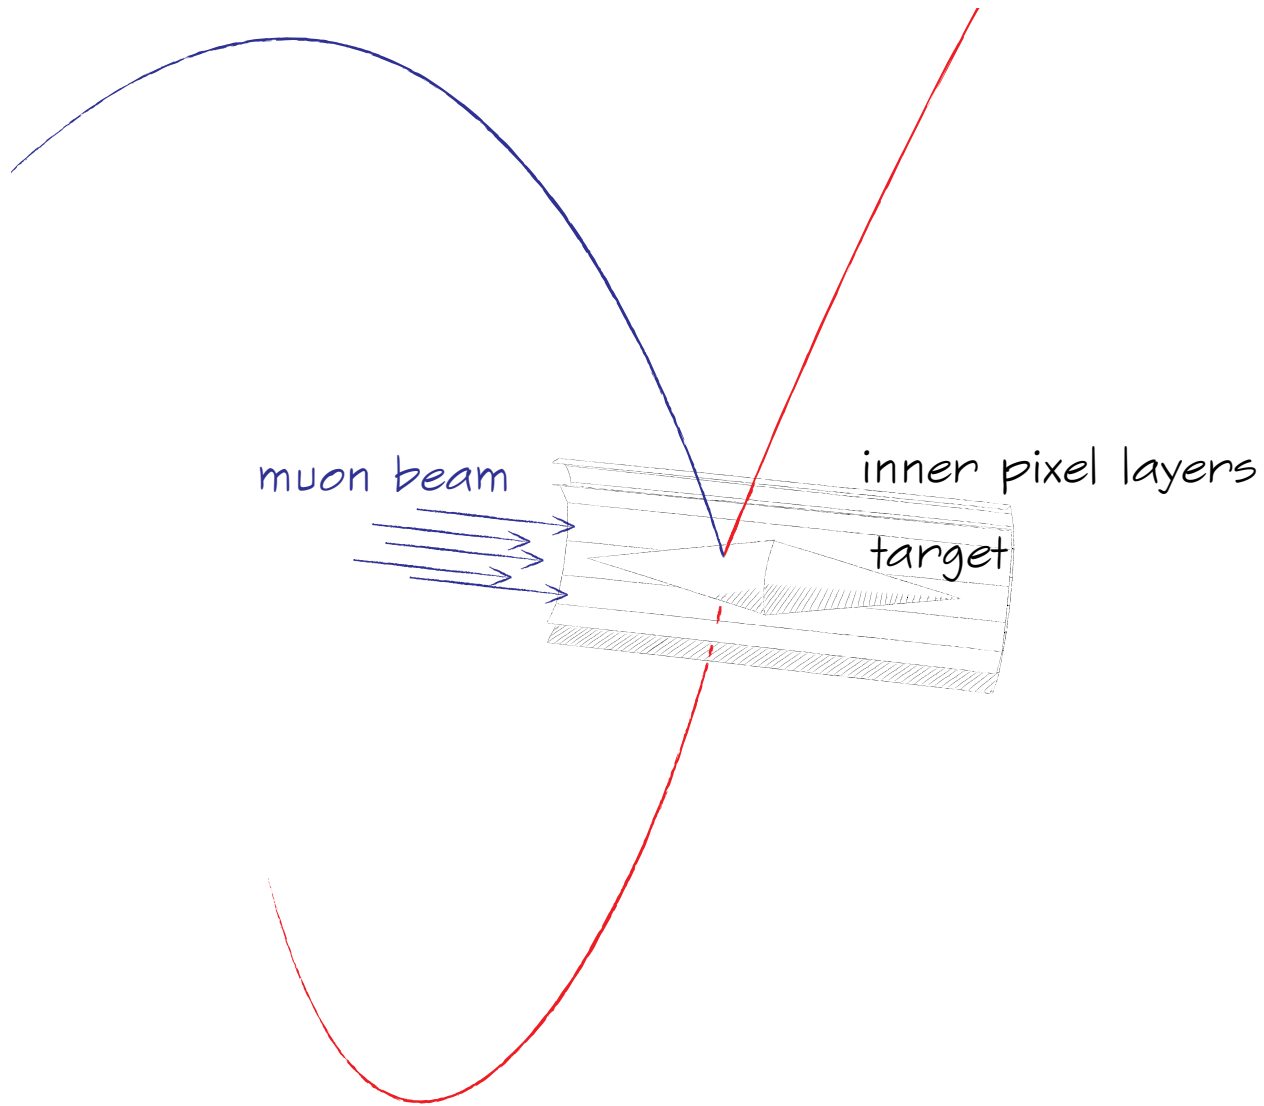




Detector Design

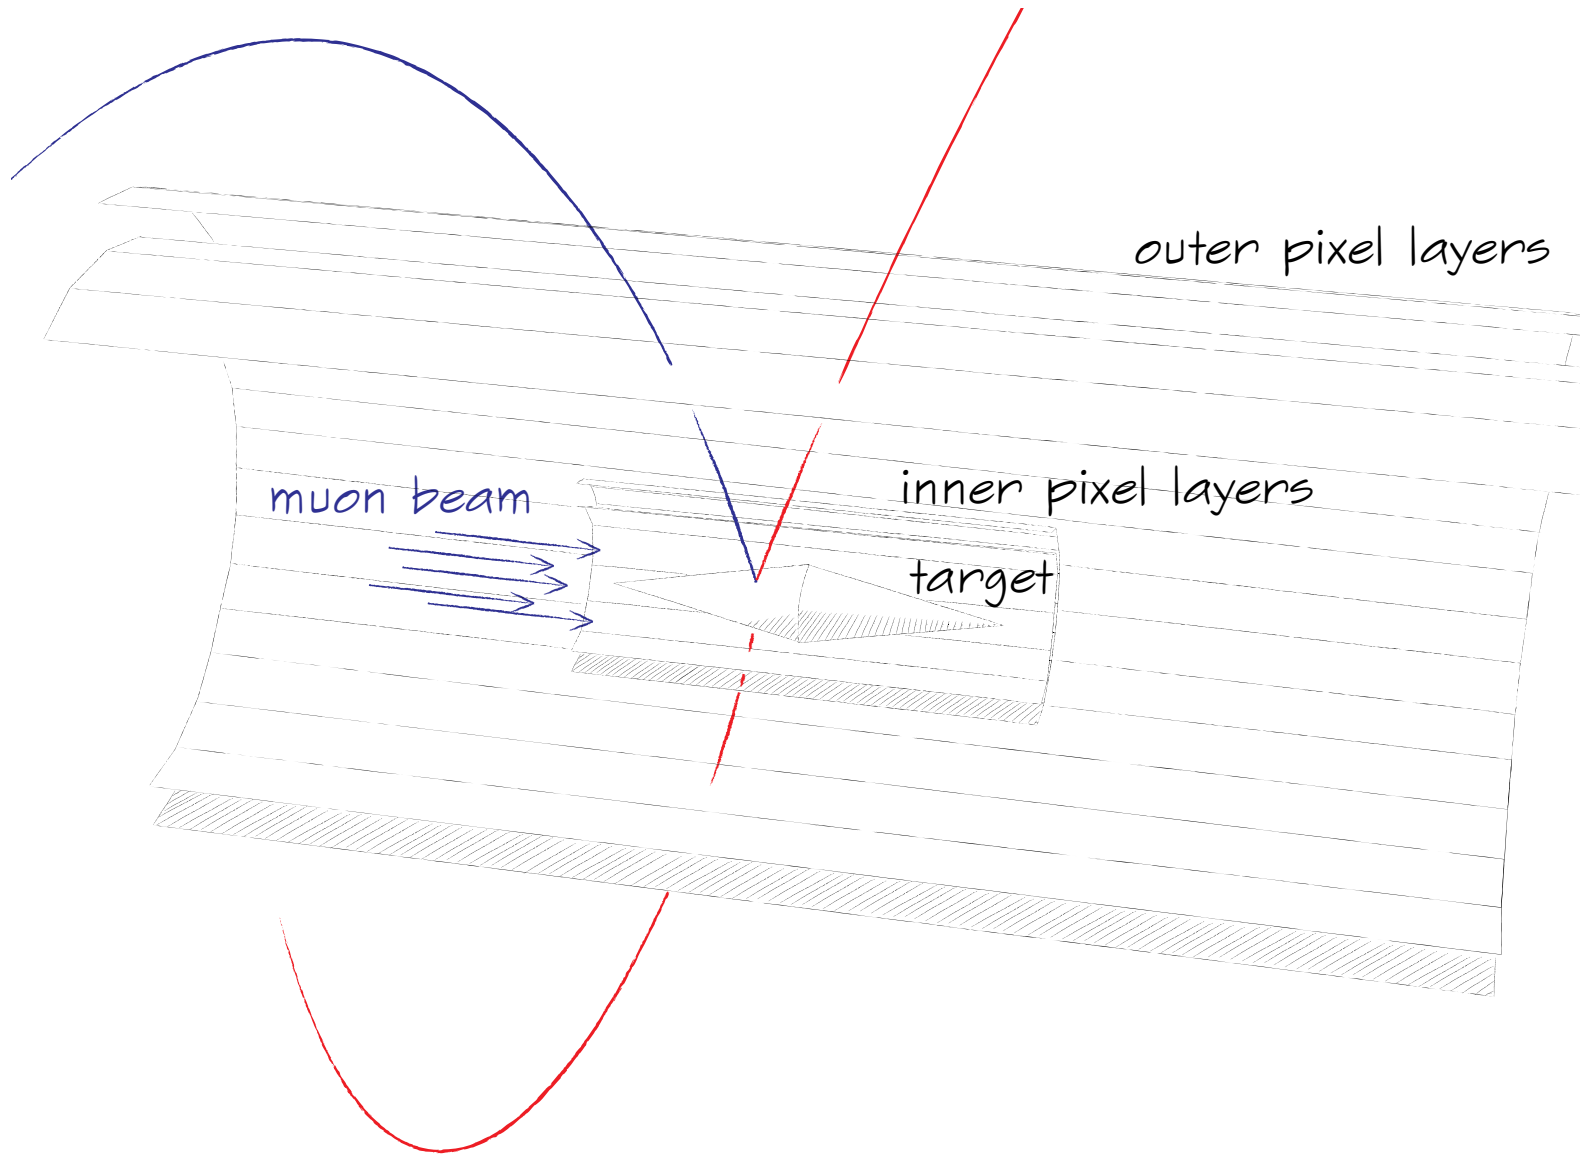




Detector Design

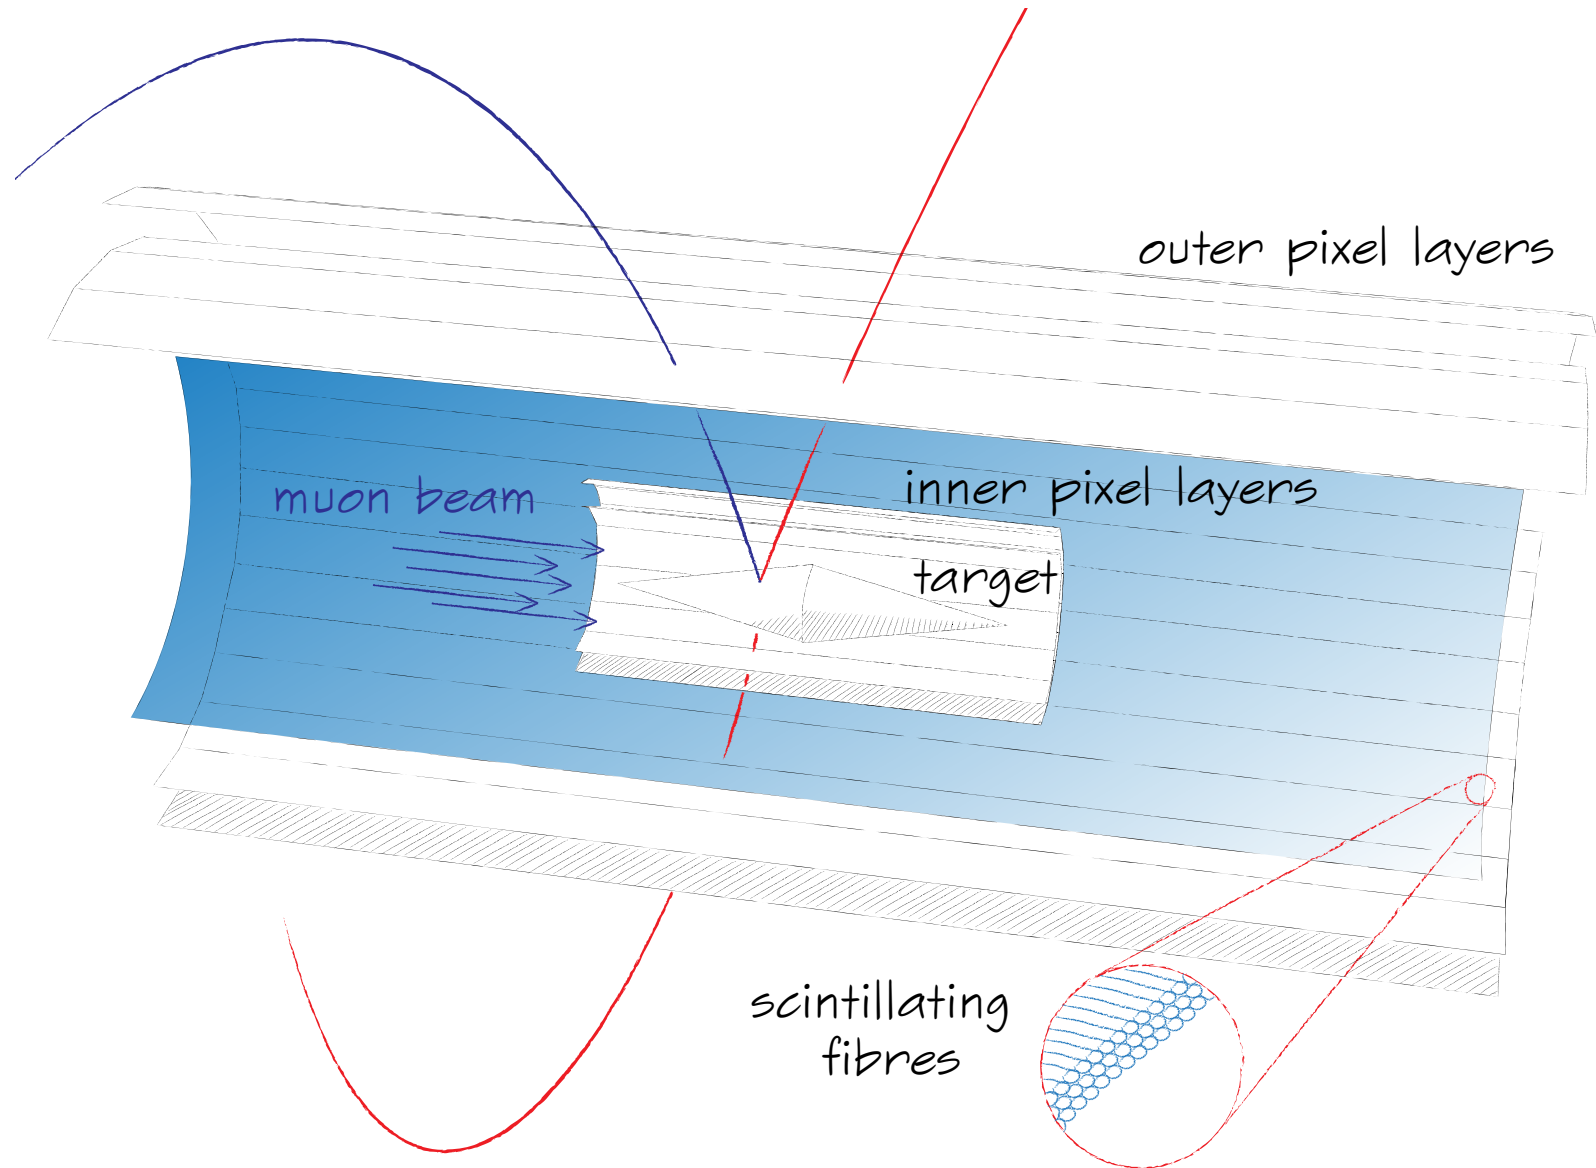




Detector Design

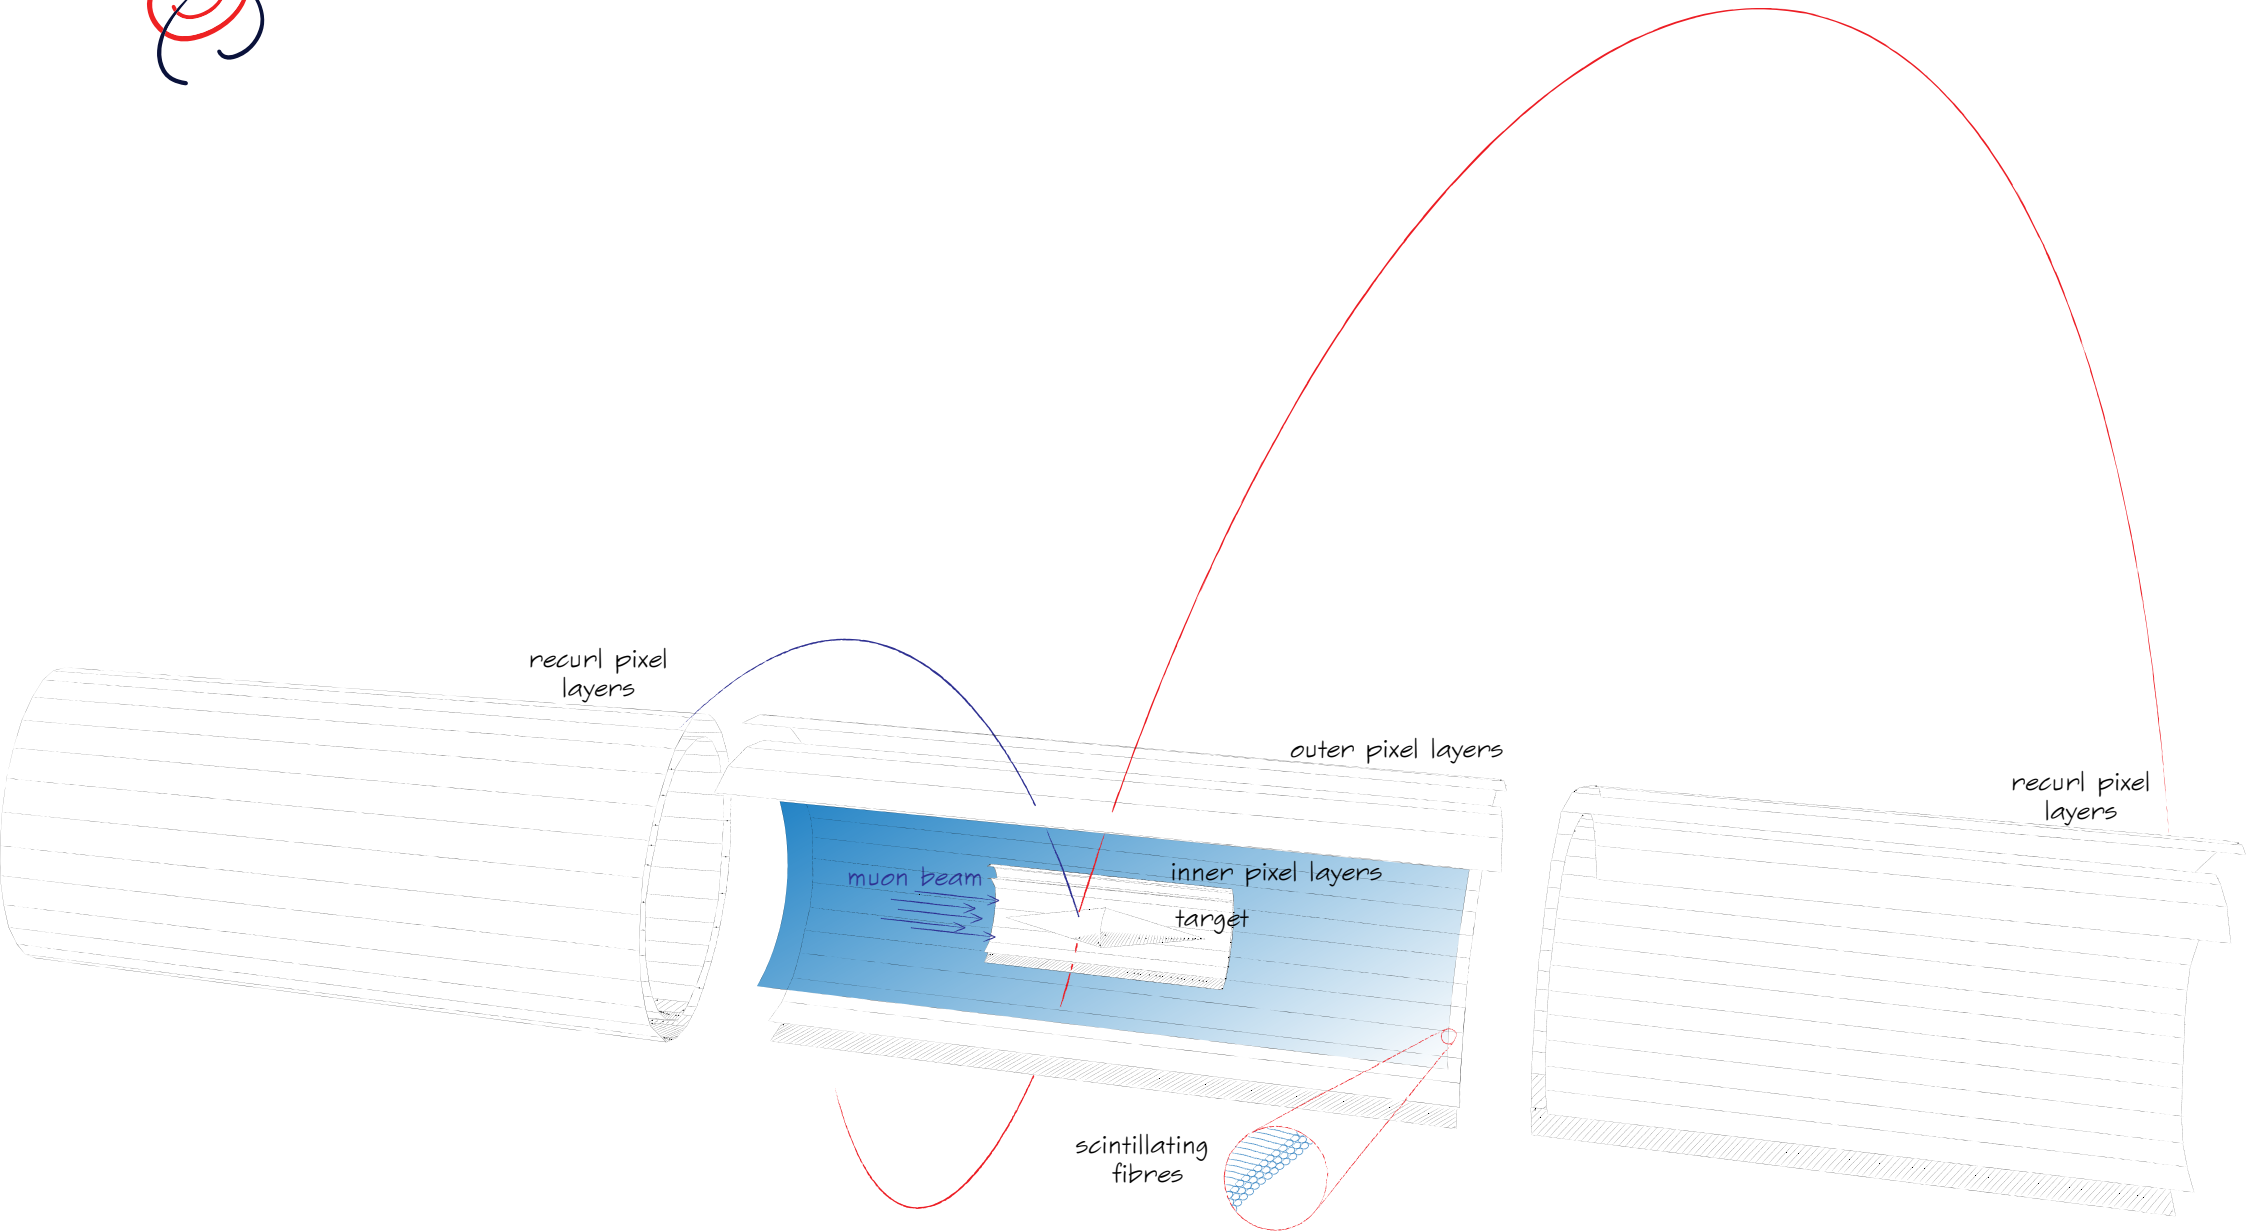




Detector Design

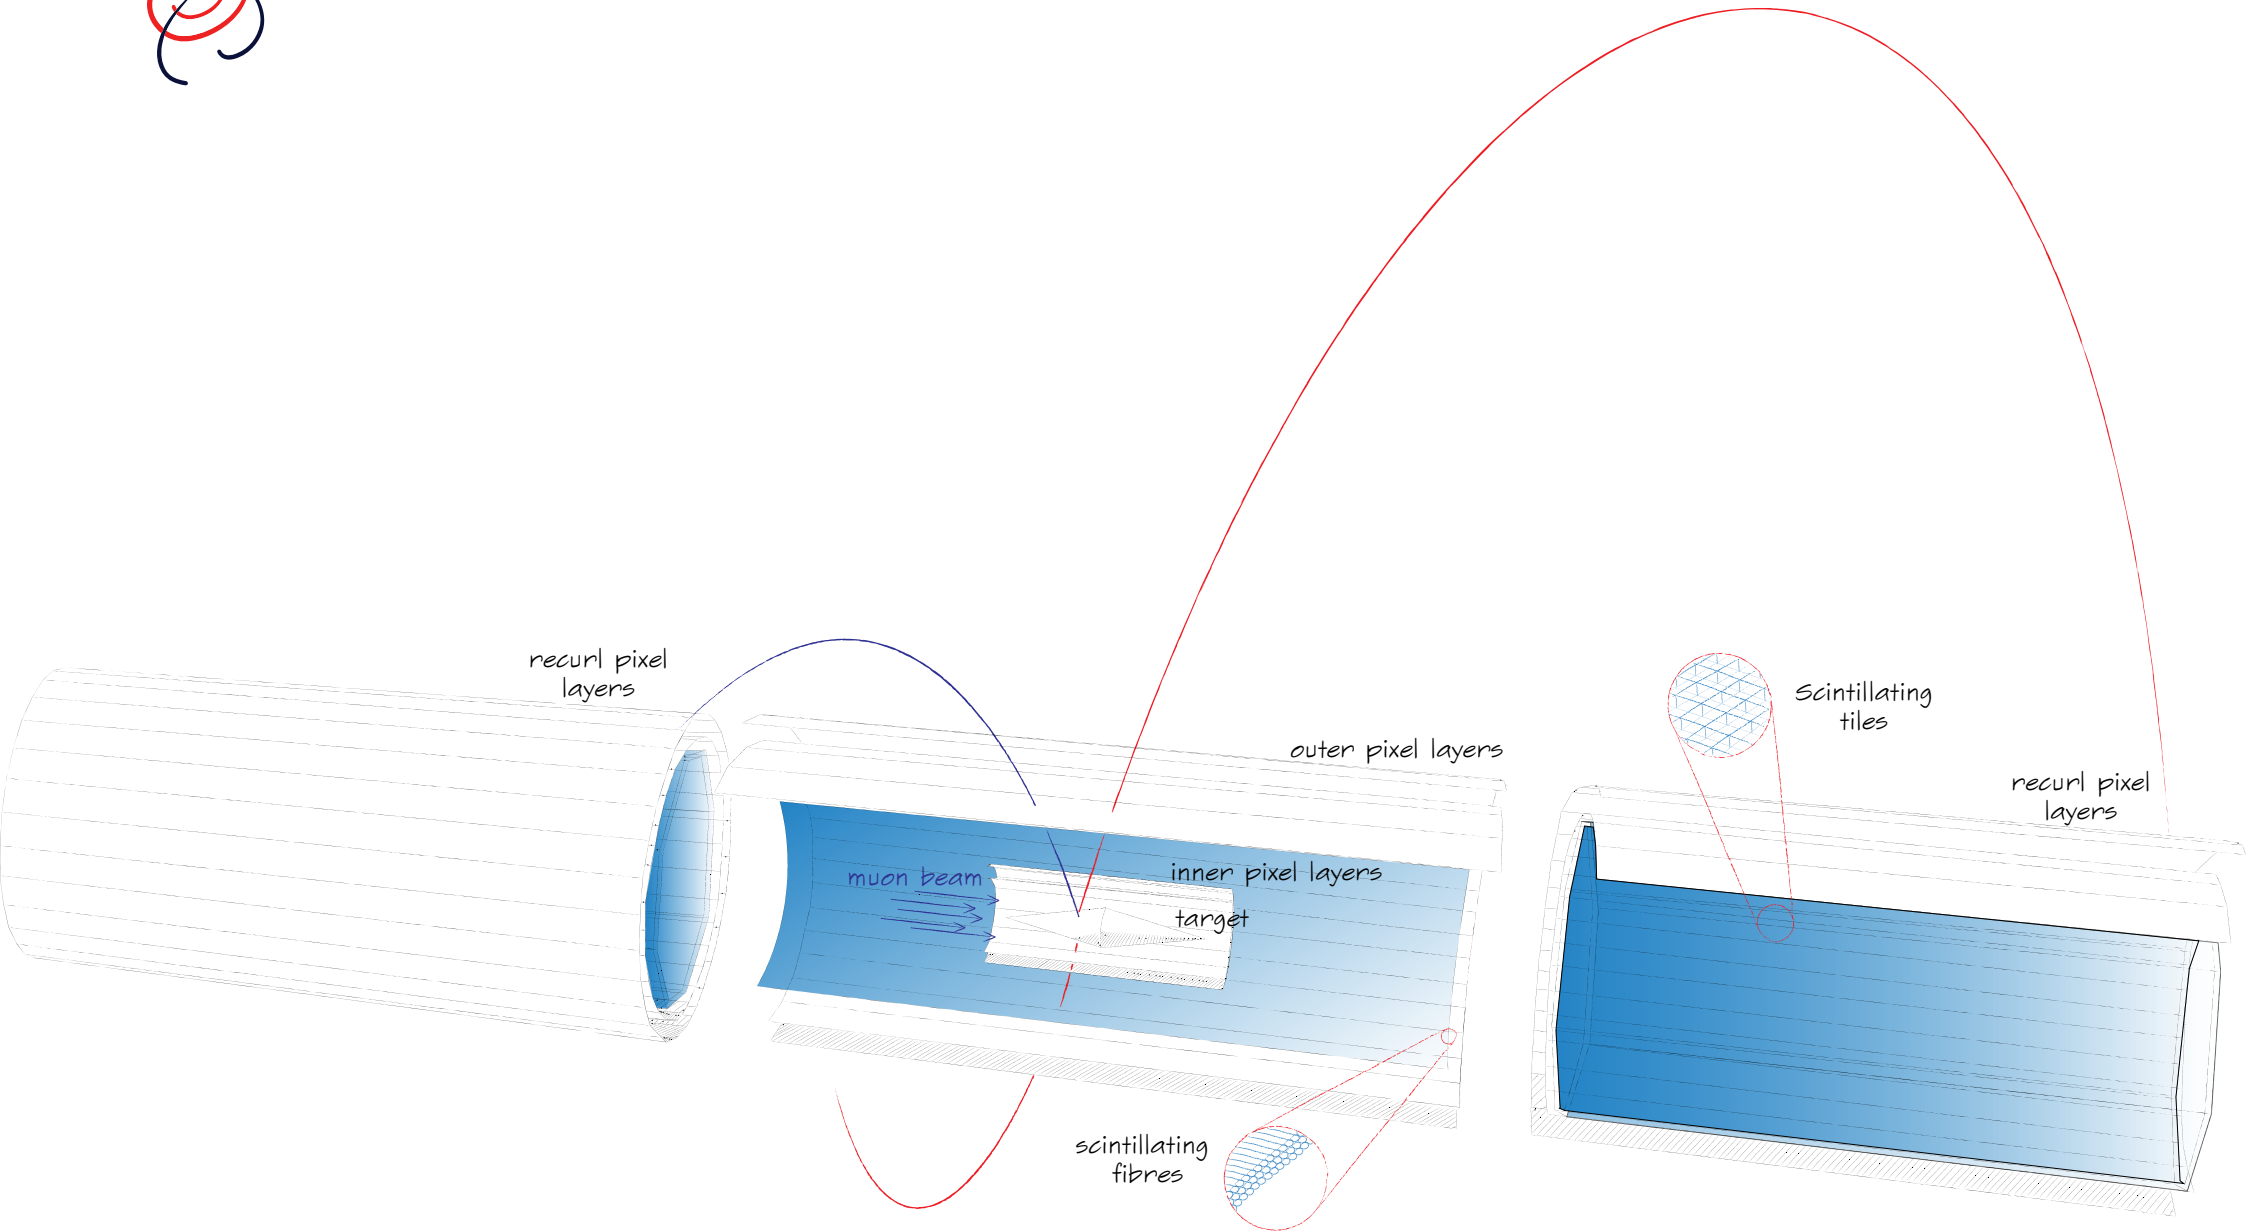




Detector Design

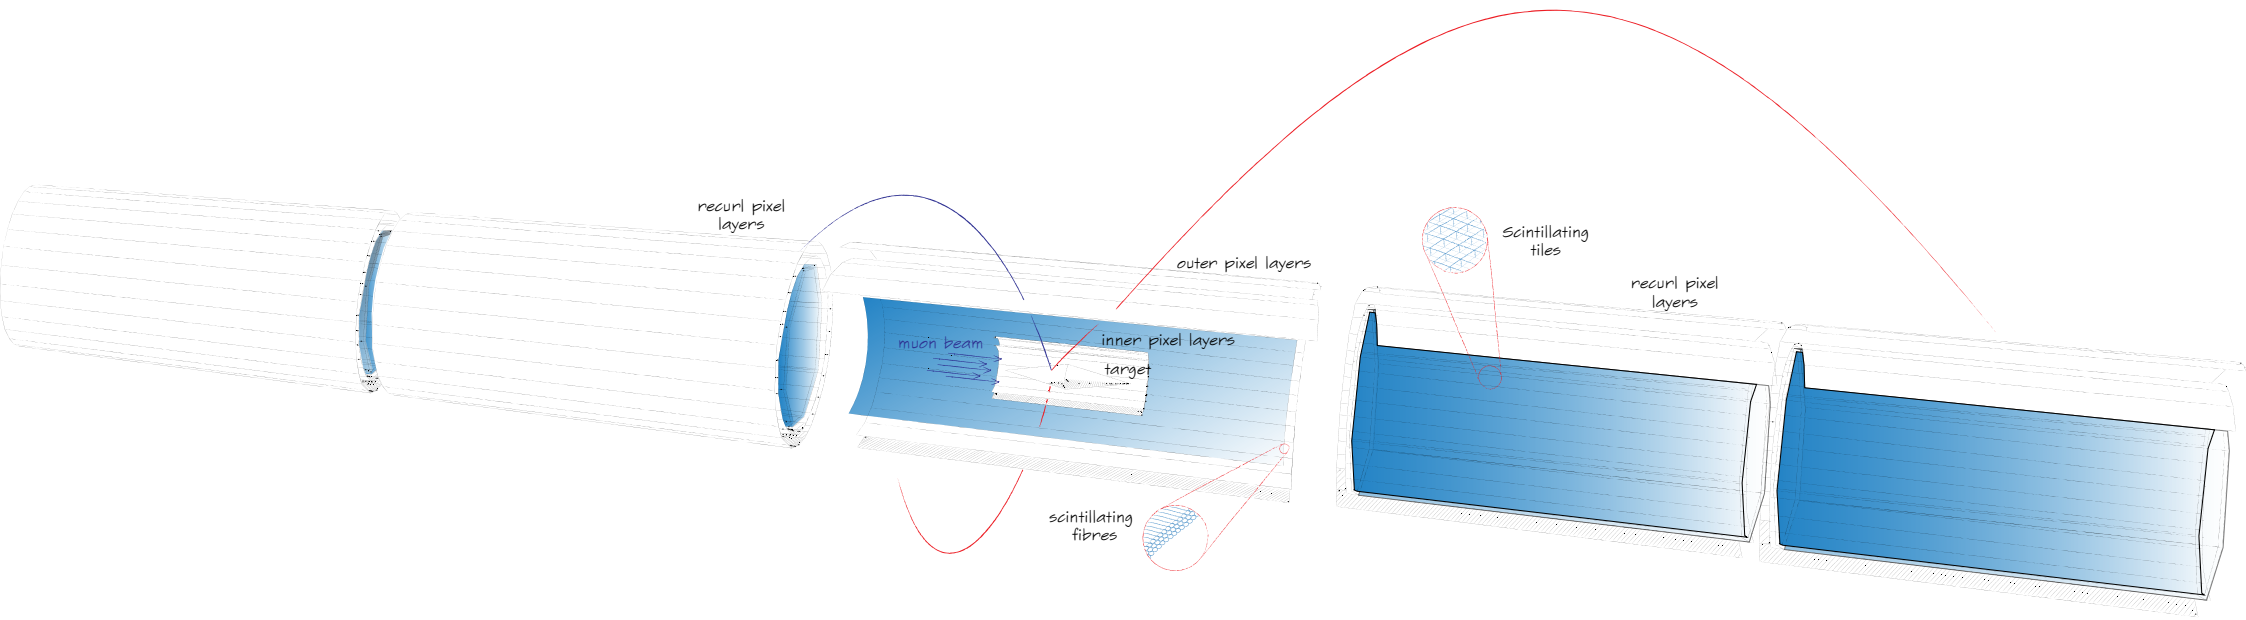




Timing measurements

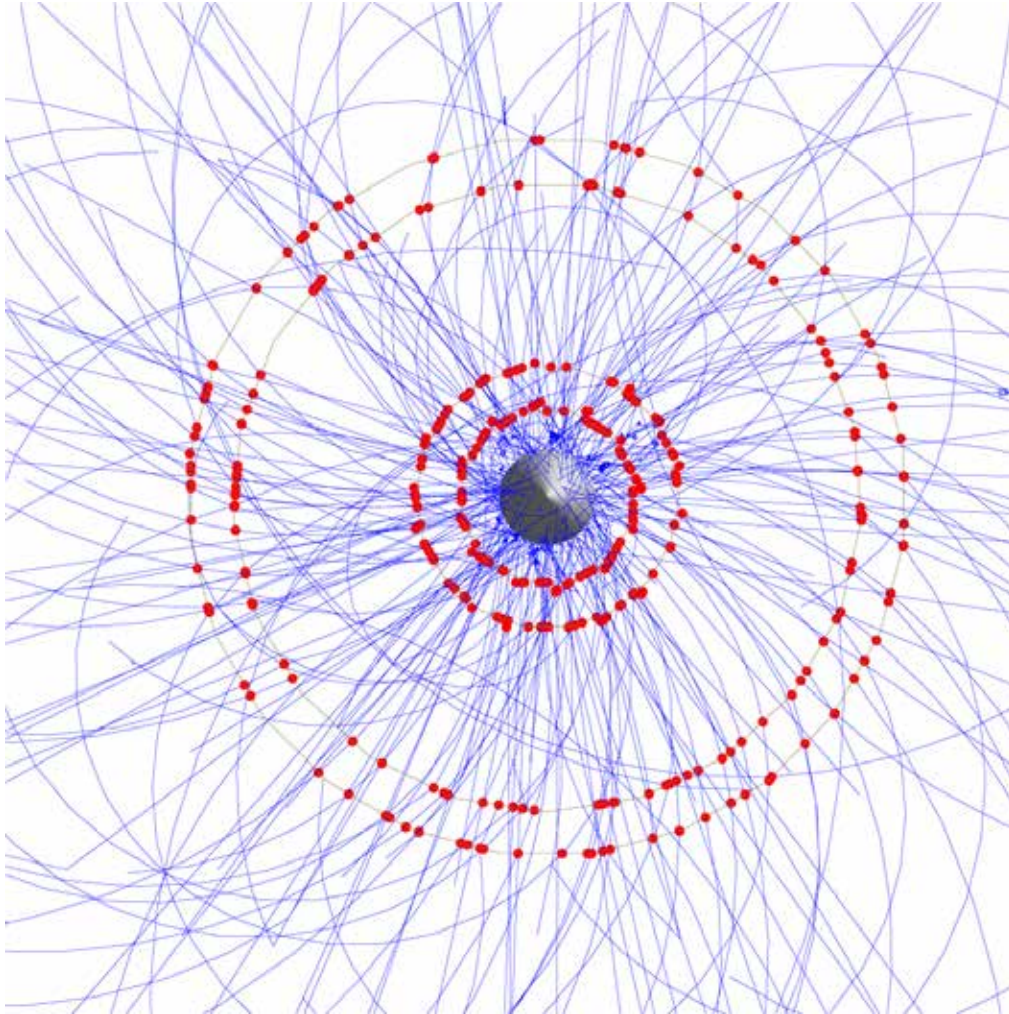

Pixels: $O(50 \text{ ns})$



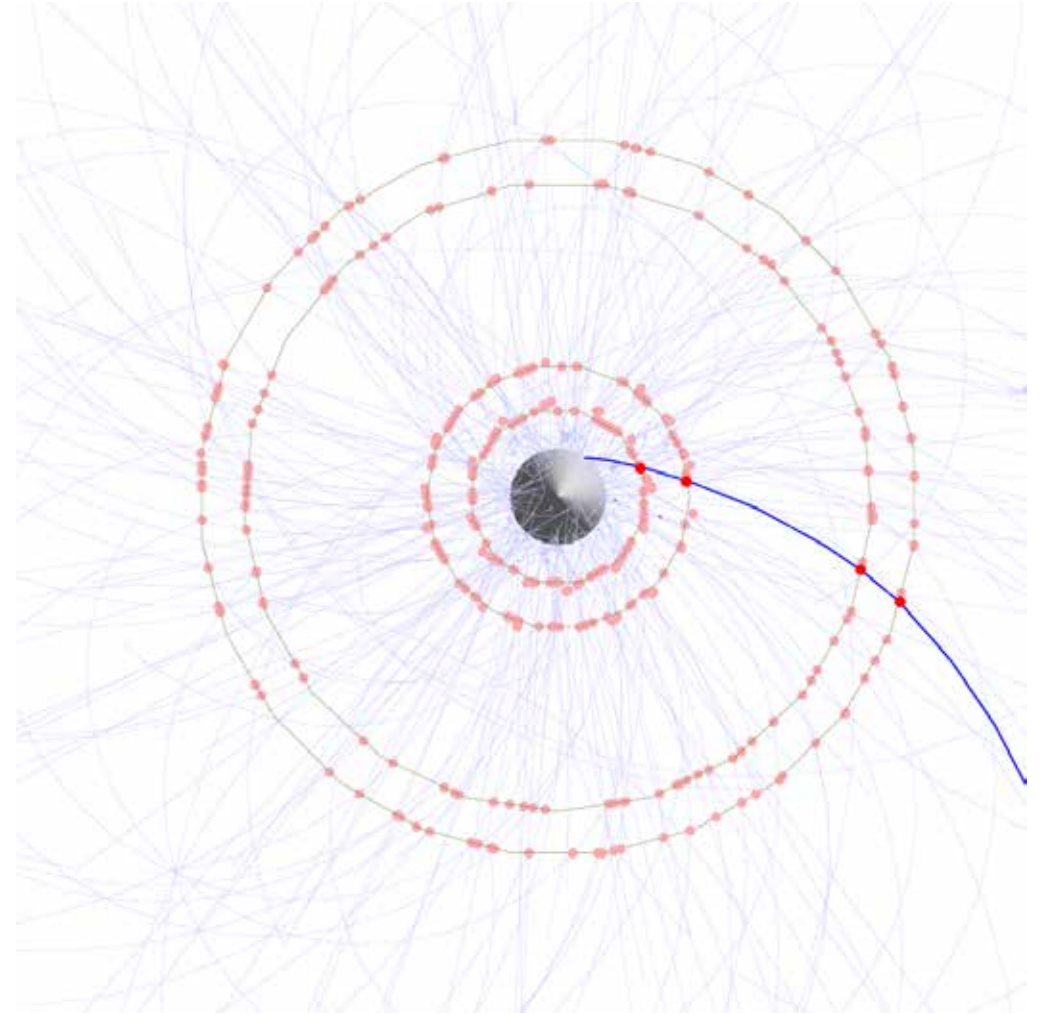


Scintillating fibres $O(1 \text{ ns})$;
Scintillating tiles $O(100 \text{ ps})$



Timing Detector: Scintillating Fibres


- 3-5 layers of 250 μm scintillating fibres
- Read-out by silicon photomultipliers (SiPMs) and custom ASIC (STiC)
- Timing resolution $\mathcal{O}(1 \text{ ns})$ (measured with sodium source)

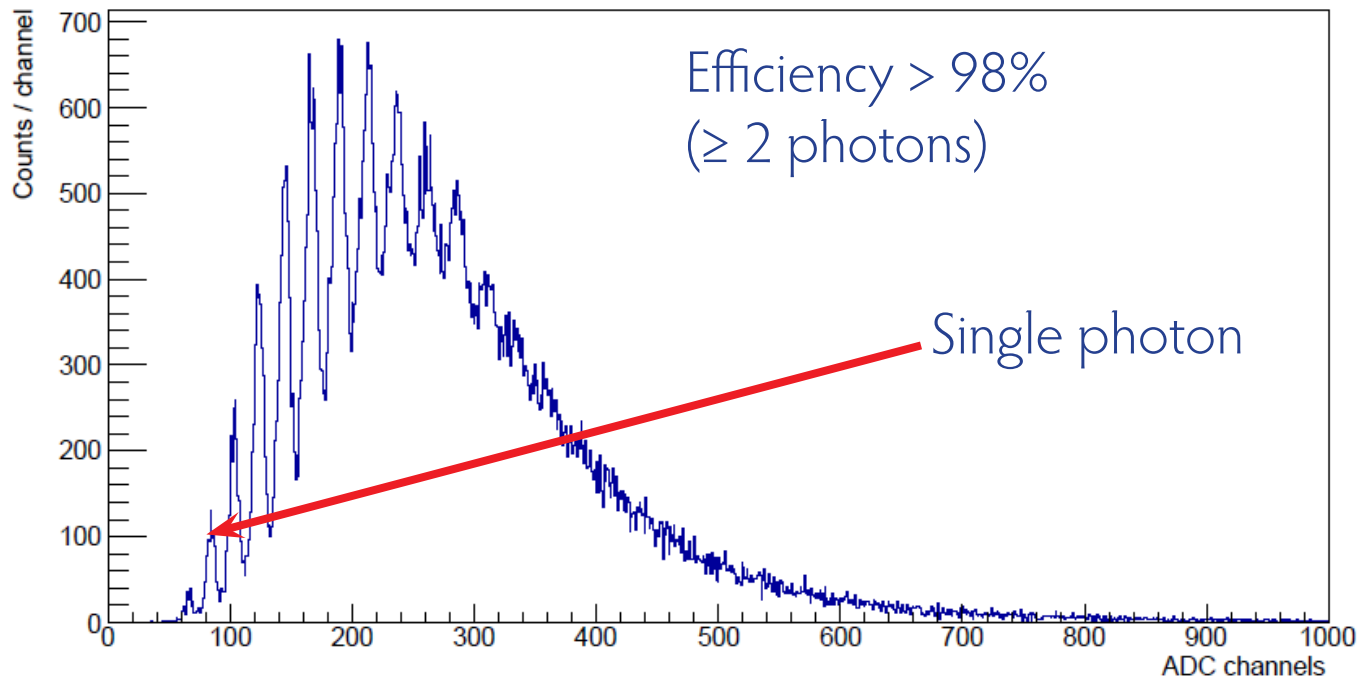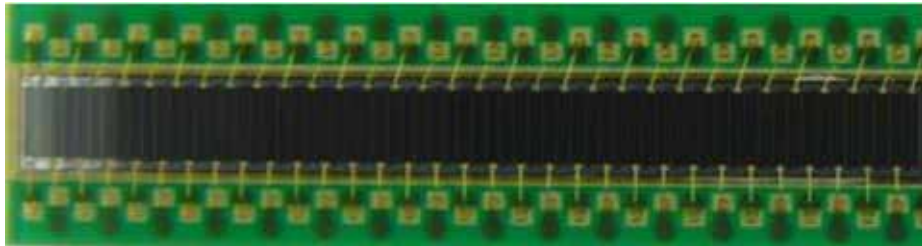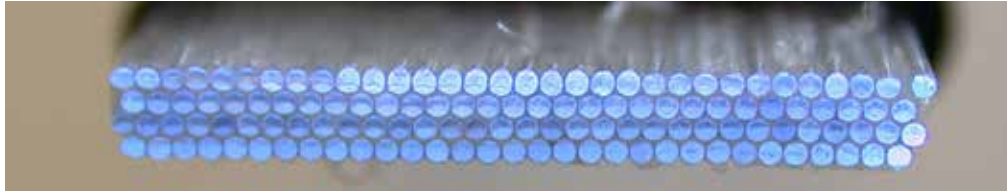



Timing Detector: Scintillating tiles


- $\sim 0.5 \text{ cm}^3$ scintillating tiles
- Read-out by silicon photomultipliers (SiPMs) and custom ASIC (STiC)

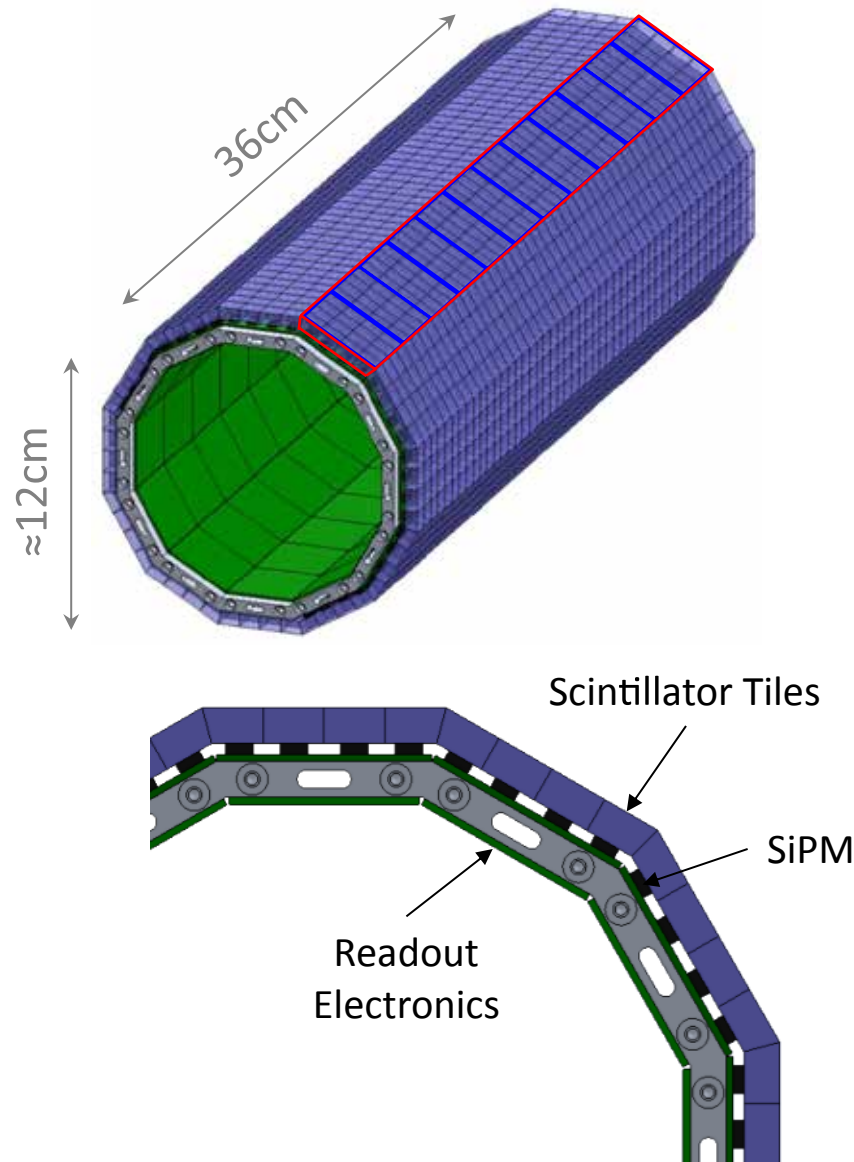




Timing Detector: Scintillating tiles

Front

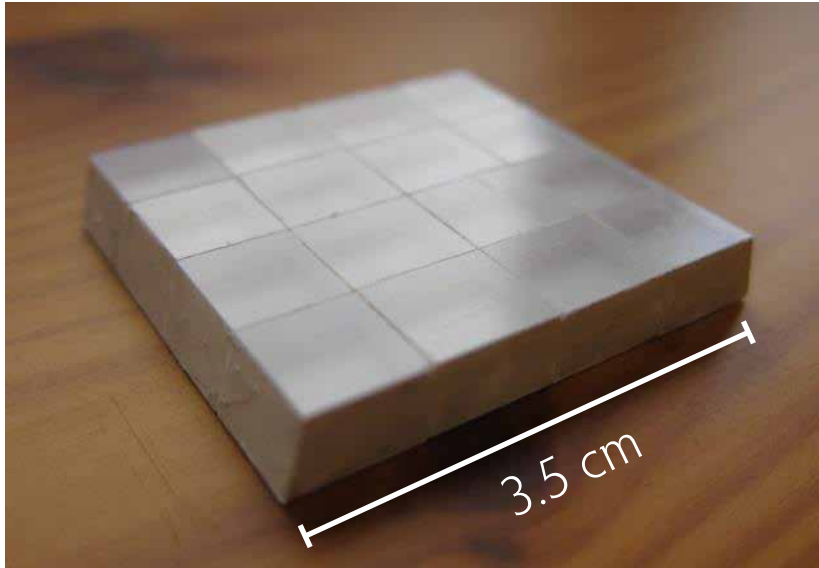


Back

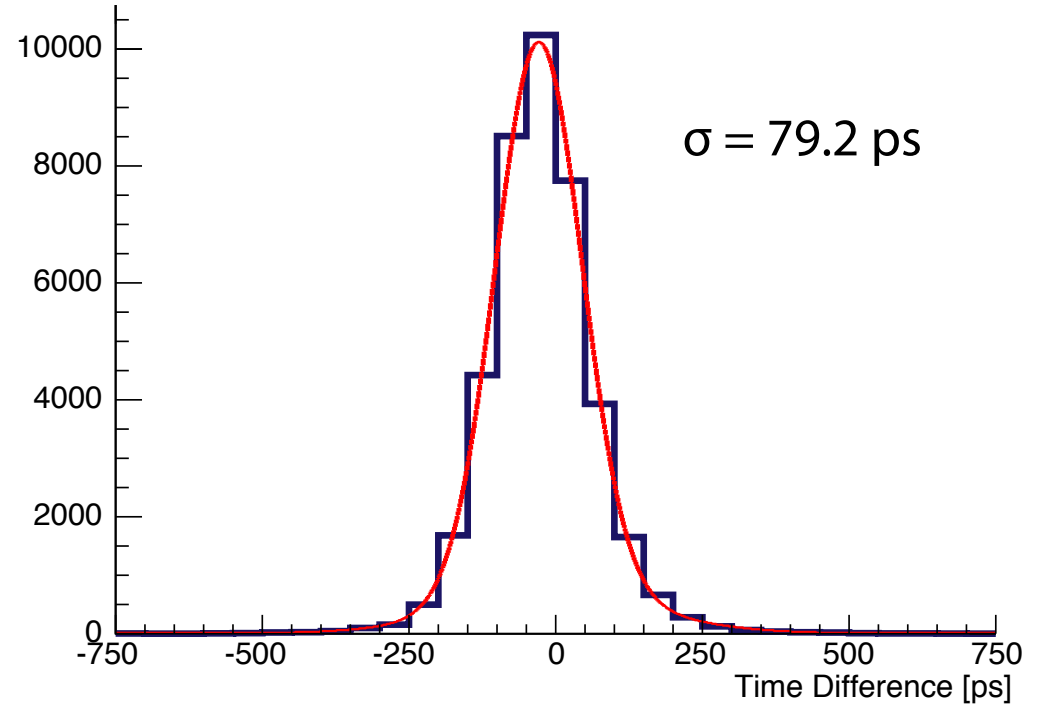

- Test beam with tiles, SiPMs and readout ASIC
- Timing resolution $\sim 80 \text{ ps}$



Data Acquisition

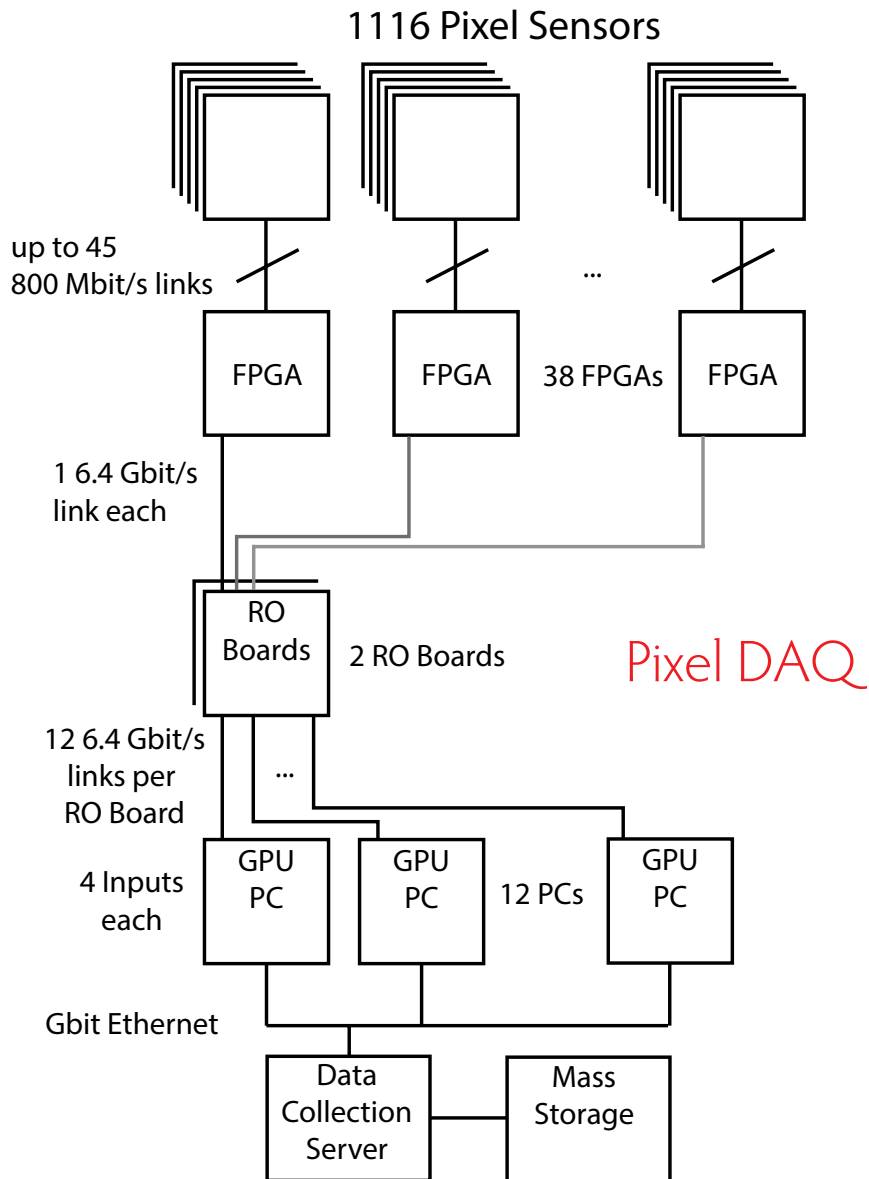

- 280 Million pixels (+ fibres and tiles)
- No trigger
- ~ 1 Tbit/s
- FPGA-based switching network
- O(50) PCs with GPUs



Online filter farm





Online software filter farm

- Continuous front-end readout (no trigger)
- ~ 1 Tbit/s
- PCs with FPGAs and Graphics Processing Units (GPUs)
- Online track and event reconstruction
- 10^9 3D track fits/s achieved
- Data reduction by factor ~ 1000
- Data to tape < 100 Mbyte/s




Simulated Performance

- 3D multiple scattering track fit
- Simulation results:
 - 280 keV single track momentum
 - 520 keV total mass resolution

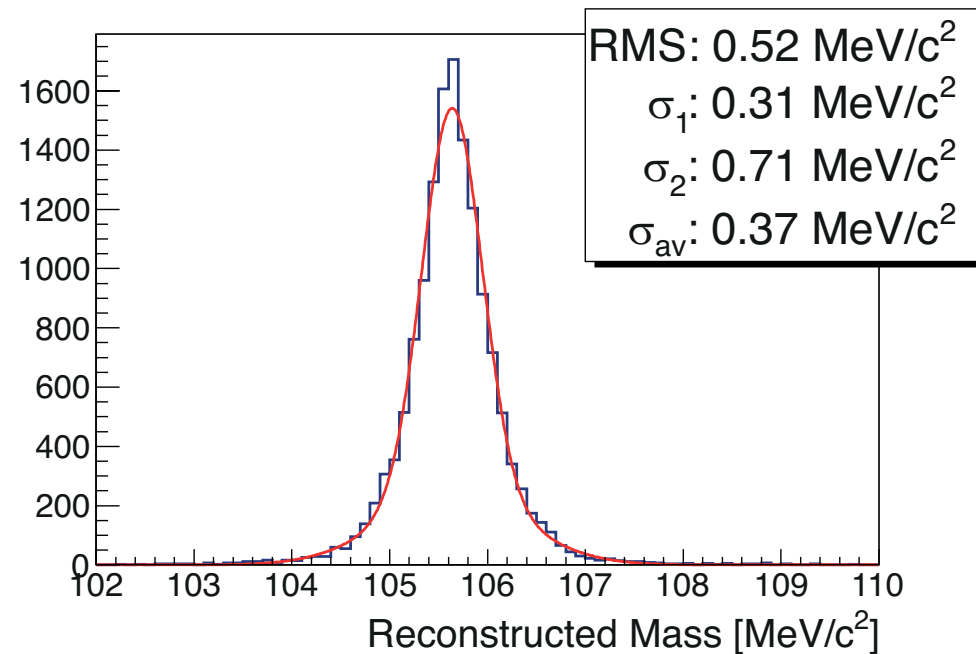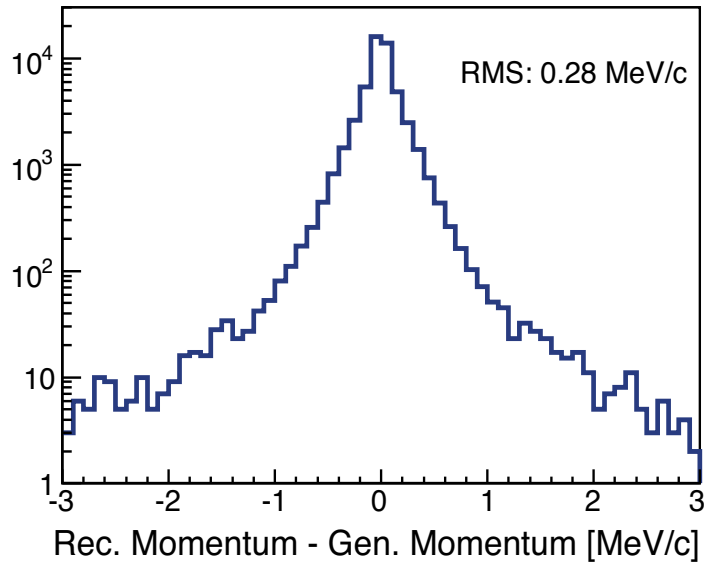





Simulated Performance

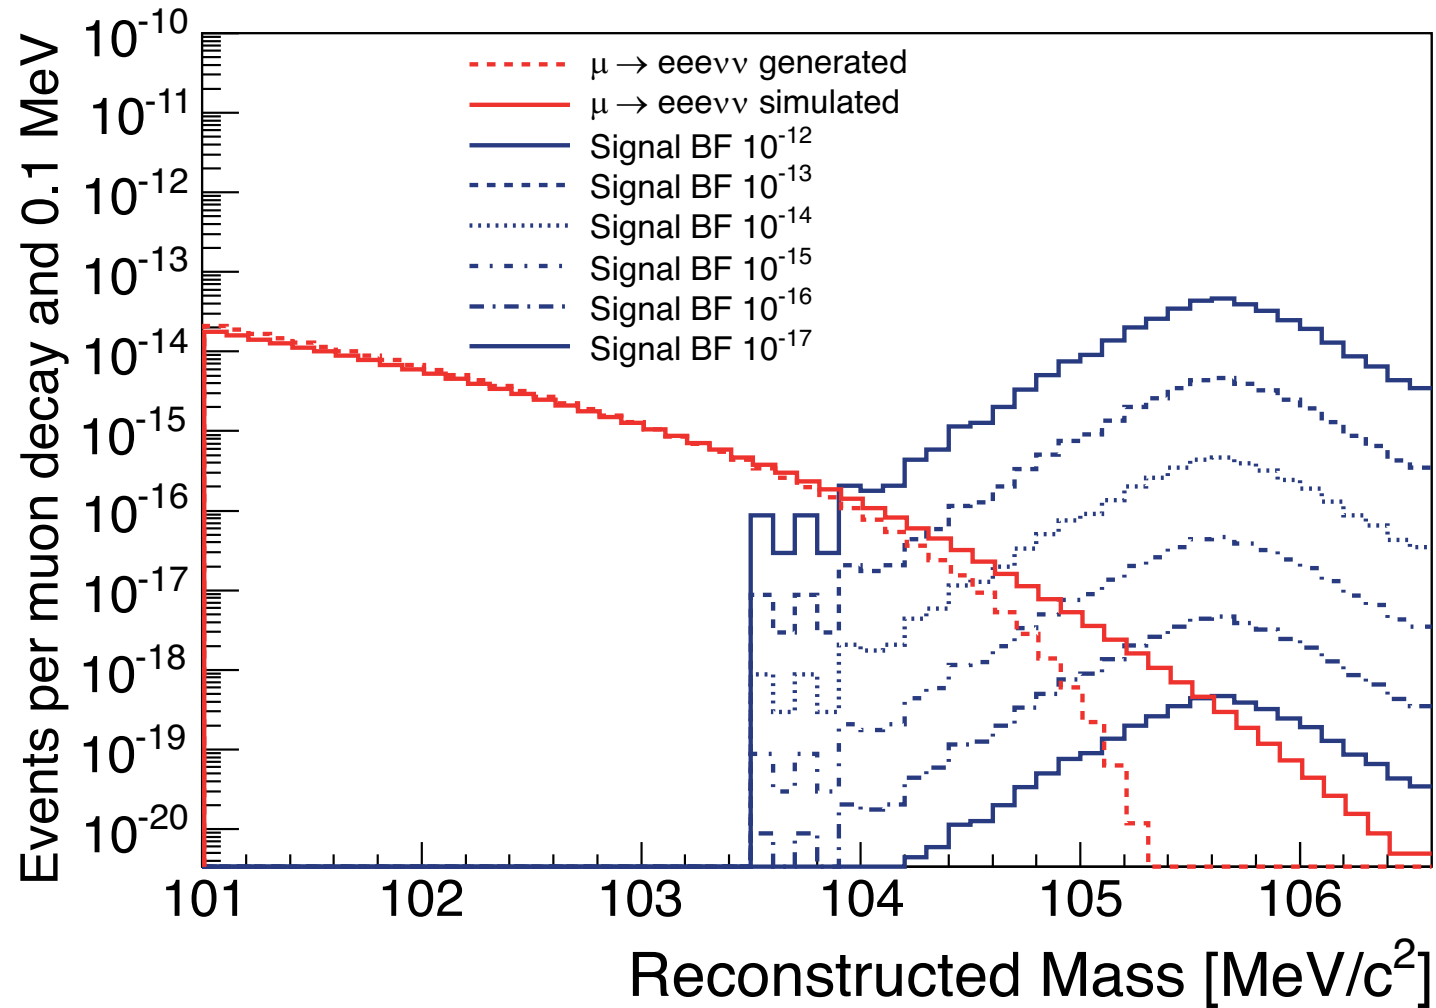





Sensitivity

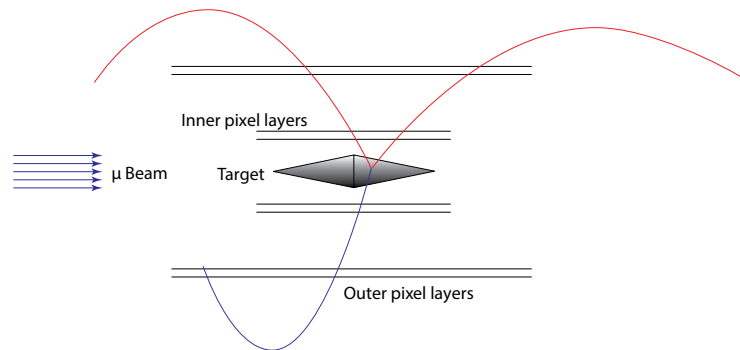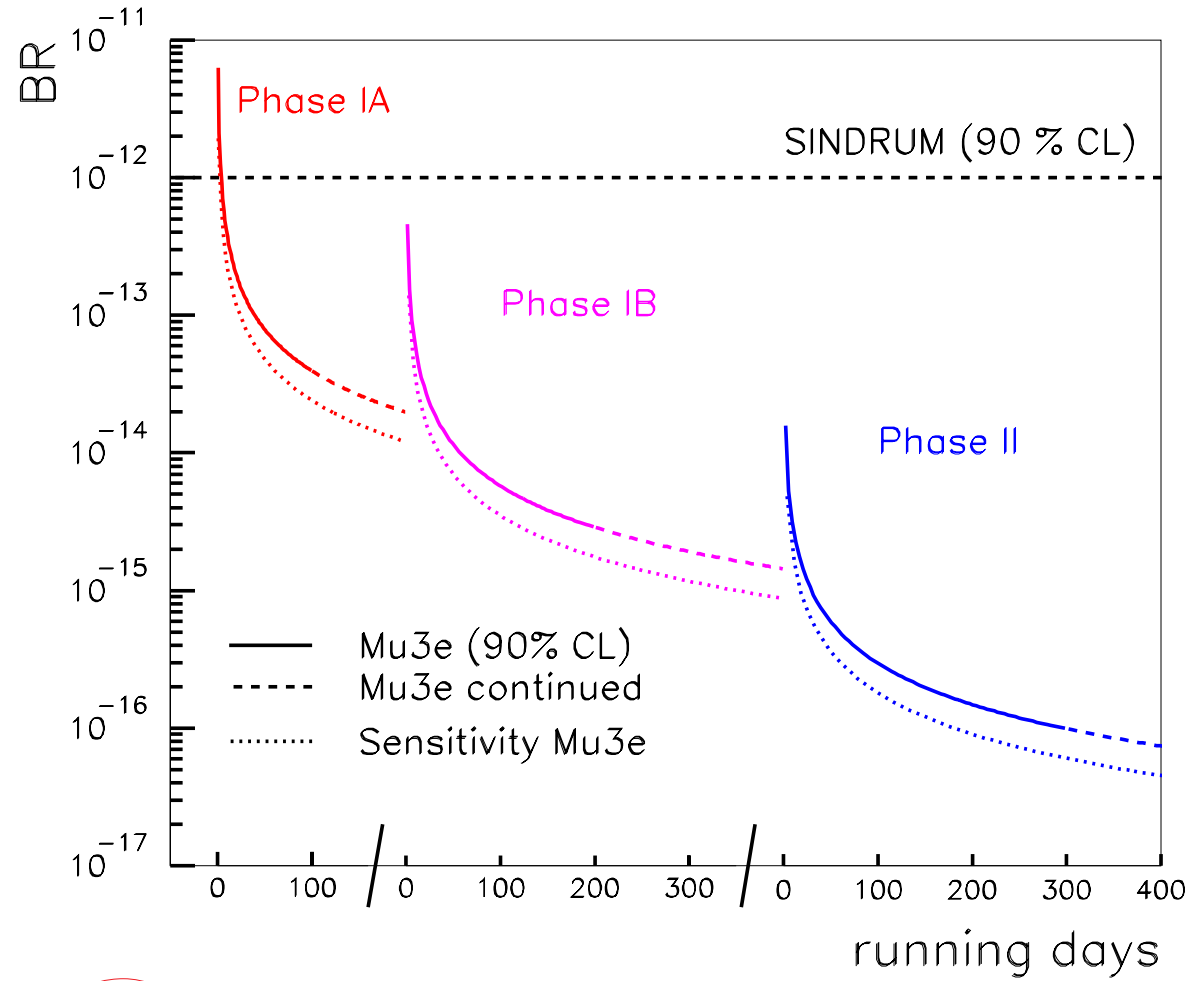

Phase IA: Starting 2016
 $2 \cdot 10^7 \mu/s$





Sensitivity

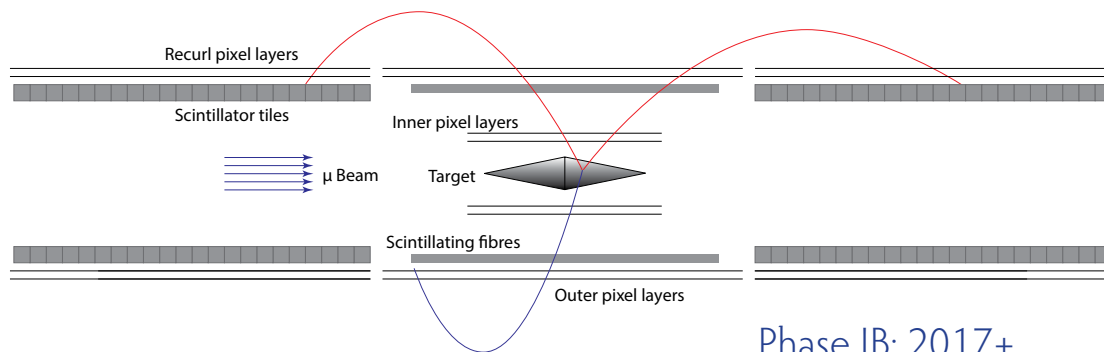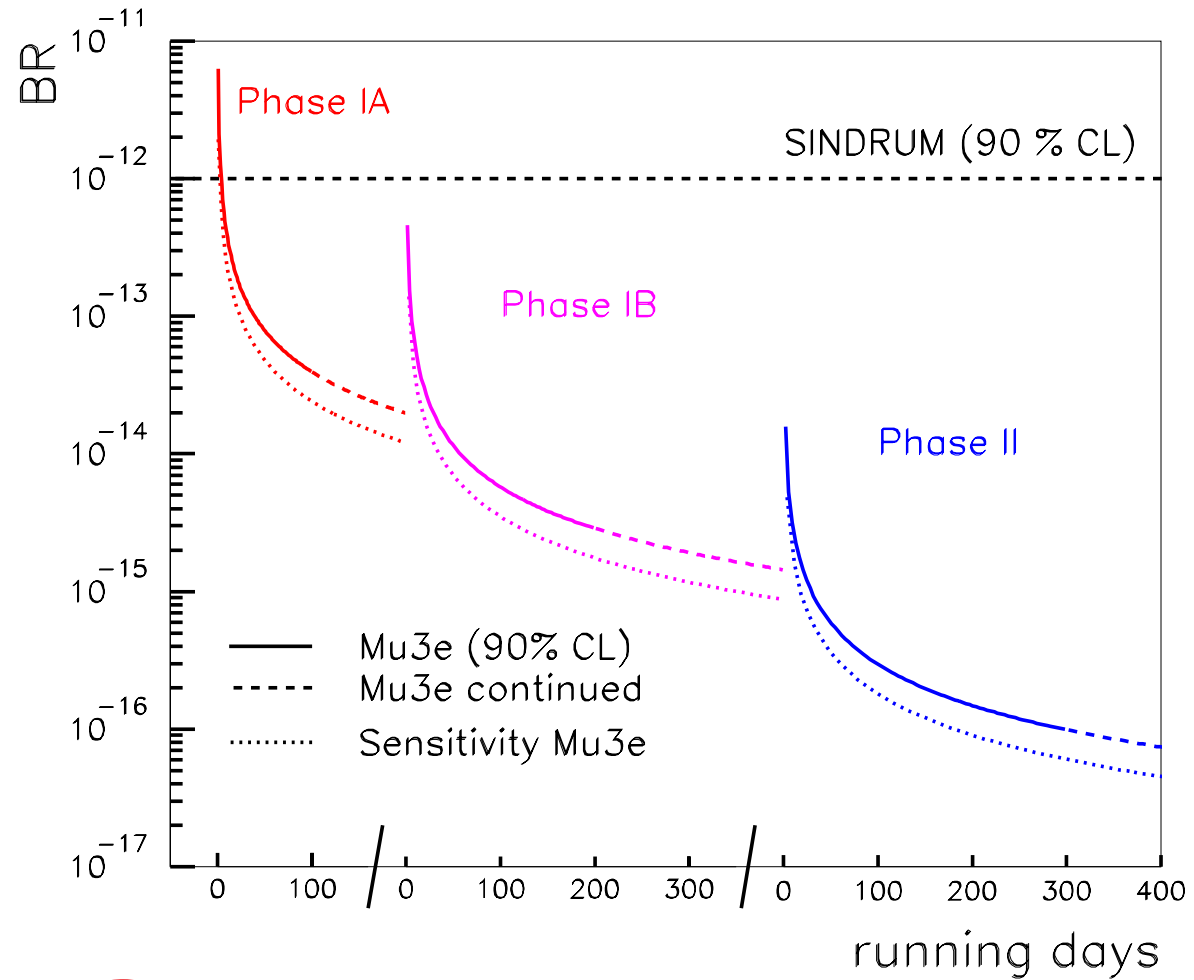

Phase IB: 2017+
 $1 \cdot 10^8 \mu/s$




Sensitivity

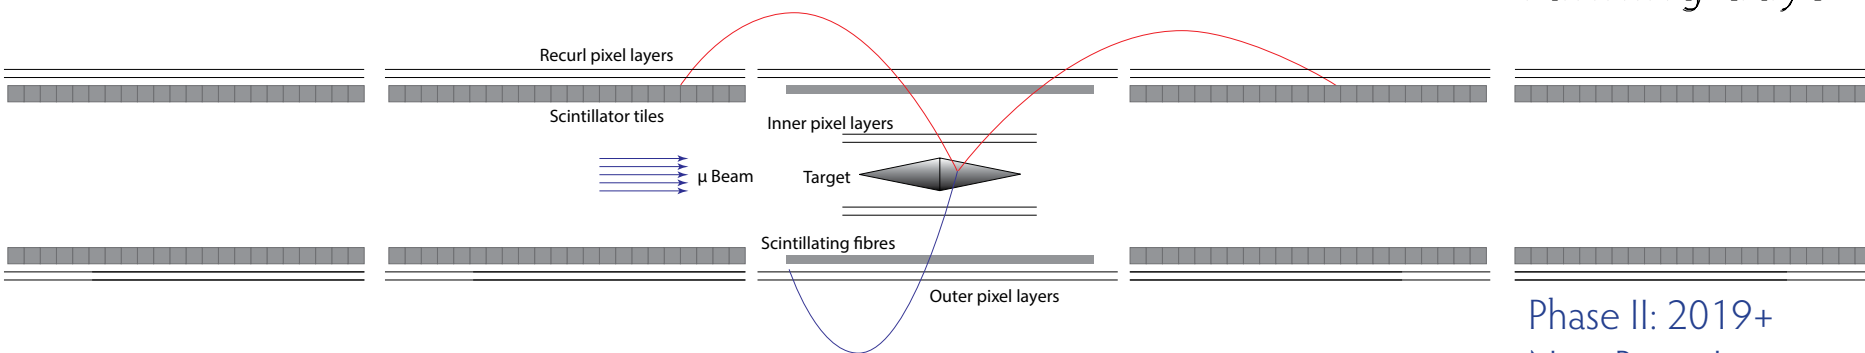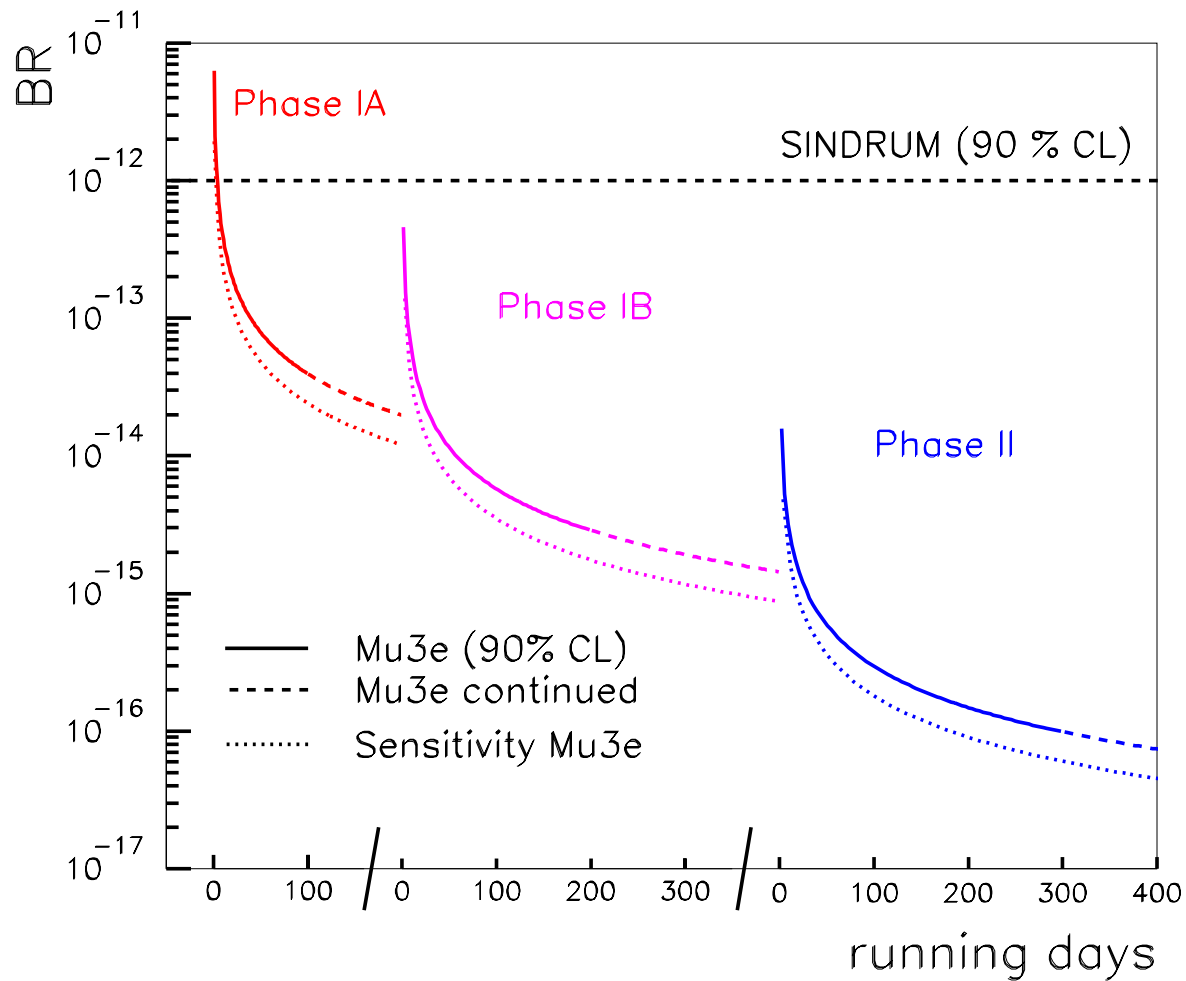

Phase II: 2019+
 New Beam Line
 $2 \cdot 10^9 \mu/s$

Conclusion



- Mu3e aims for $\mu \rightarrow eee$ at the 10^{-16} level

- First large scale use of HV-MAPS


- Build detector layers thinner than a hair

- Timing at the 100 ps level

- Reconstruct 2 billion tracks/s in 1 Tbit/s on ~50 GPUs

- Start data taking in 2016

- 2 billion muons/s not before 2019

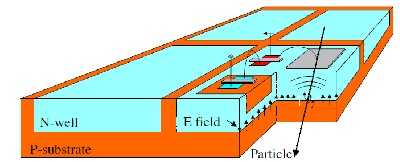





Backup Material






Radiation Hardness

- Requirements not as strict as at LHC

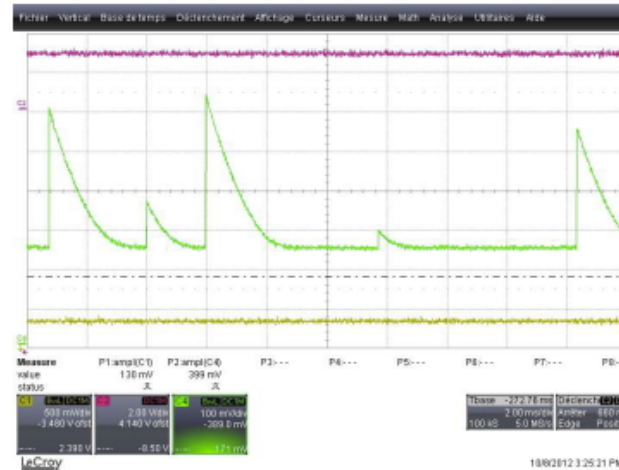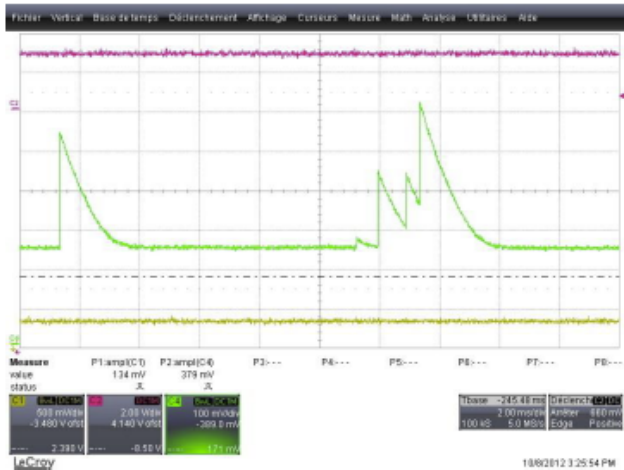

The chip works, particles are measured when the chip is in the beam: Output of the amplifier

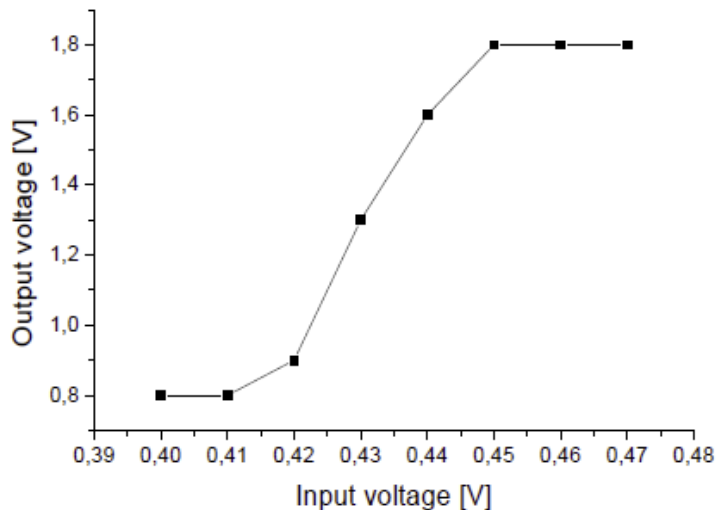


- Irradiation at PS
- After 380 MRad ($8 \times 10^{15} n_{eq}/cm^2$)
- Chip still working

Comparator characteristics.


(Courtesy Ivan Perić, RESMDD 2012)



MUPIX electronics

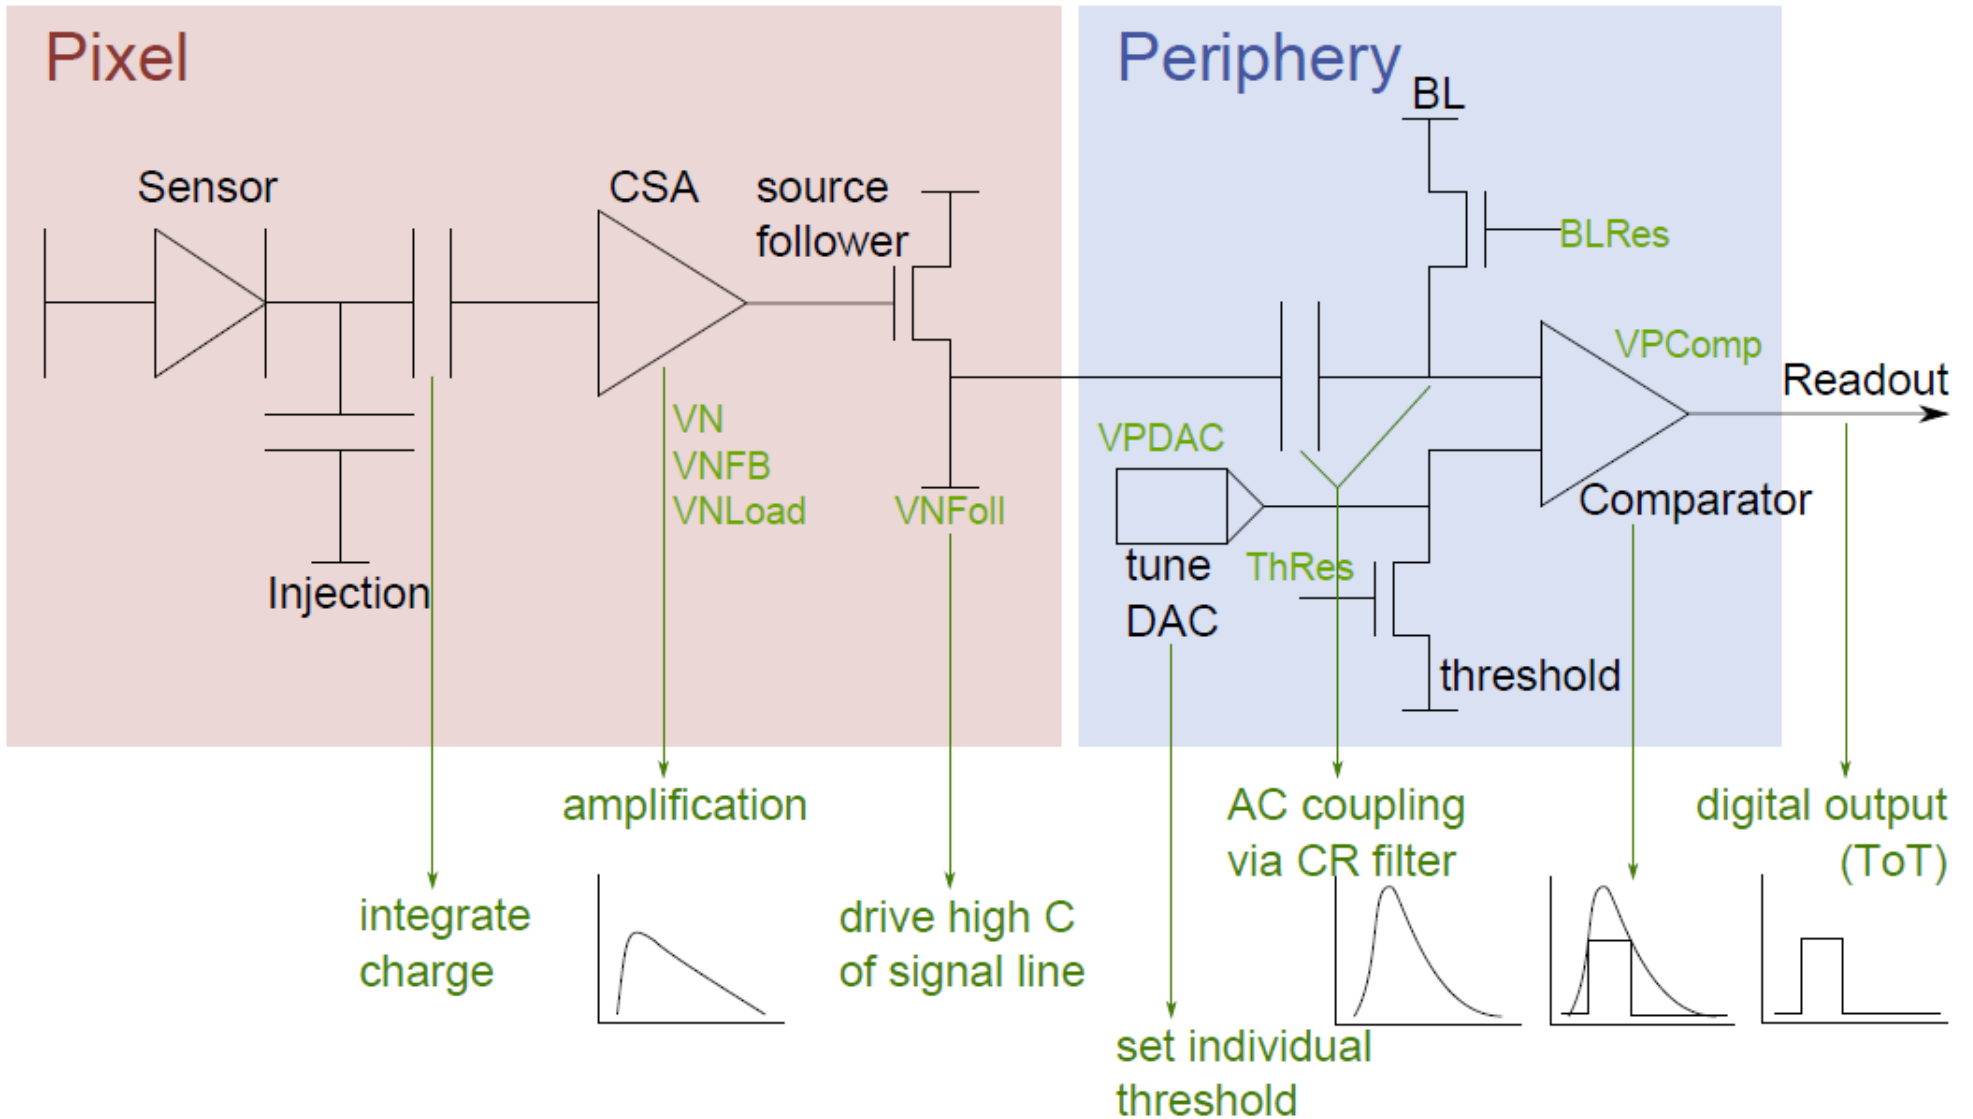

A general effective Lagrangian



Tensor terms (dipole) e.g. supersymmetry

$$L_{\mu \rightarrow eee} = 2 G_F (m_\mu A_R \bar{\mu}_R \sigma^{\mu\nu} e_L F_{\mu\nu} + m_\mu A_L \bar{\mu}_L \sigma^{\mu\nu} e_R F_{\mu\nu})$$

Four-fermion terms e.g. Z'

$$+ g_1 (\bar{\mu}_R e_L) (\bar{e}_R e_L) + g_2 (\bar{\mu}_L e_R) (\bar{e}_L e_R)$$

scalar

$$+ g_3 (\bar{\mu}_R \gamma^\mu e_R) (\bar{e}_R \gamma^\mu e_R) + g_4 (\bar{\mu}_L \gamma^\mu e_L) (\bar{e}_L \gamma^\mu e_L)$$


$$+ g_5 (\bar{\mu}_R \gamma^\mu e_R) (\bar{e}_L \gamma^\mu e_L) + g_6 (\bar{\mu}_L \gamma^\mu e_L) (\bar{e}_R \gamma^\mu e_R) + \text{H. C.}$$

vector





(Y. Kuno, Y. Okada,
Rev.Mod.Phys. 73 (2001) 151)

Comparison with $\mu^+ \rightarrow e^+ \gamma$



$$L_{\text{LFV}} = \frac{m_\mu}{(\kappa+1)\Lambda^2} A_R \bar{\mu}_R \sigma^{\mu\nu} e_L F_{\mu\nu} + \frac{\kappa}{(\kappa+1)\Lambda^2} (\bar{\mu}_L \gamma^\mu e_L) (\bar{e}_L \gamma^\mu e_L)$$

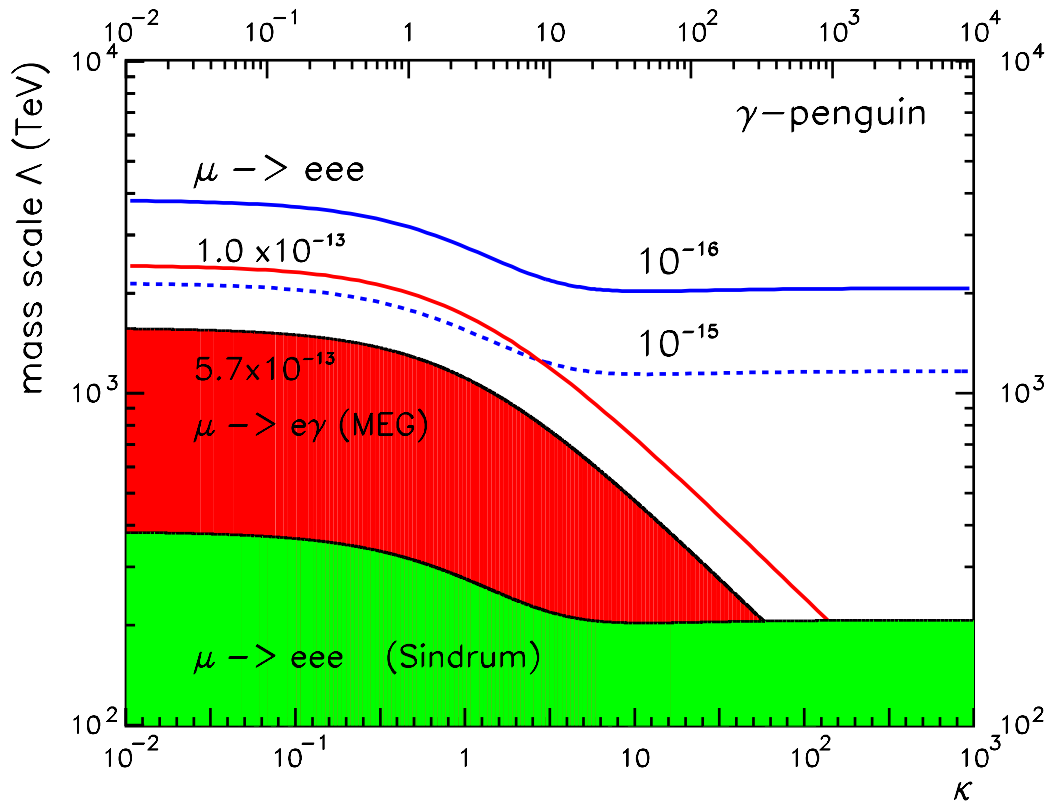

- One loop term and one contact term
- Ratio κ between them
- Common mass scale Λ
- Allows for sensitivity comparisons between $\mu \rightarrow eee$ and $\mu \rightarrow e\gamma$
- In case of dominating dipole couplings ($\kappa = 0$):

$$\frac{B(\mu \rightarrow eee)}{B(\mu \rightarrow e\gamma)} = 0.006 \quad (\text{essentially } \alpha_{em})$$