Universität Zürich[UZH]

The Mu3e Vertex Detector

Thomas Christian Senger on behalf of the Mu3e collaboration

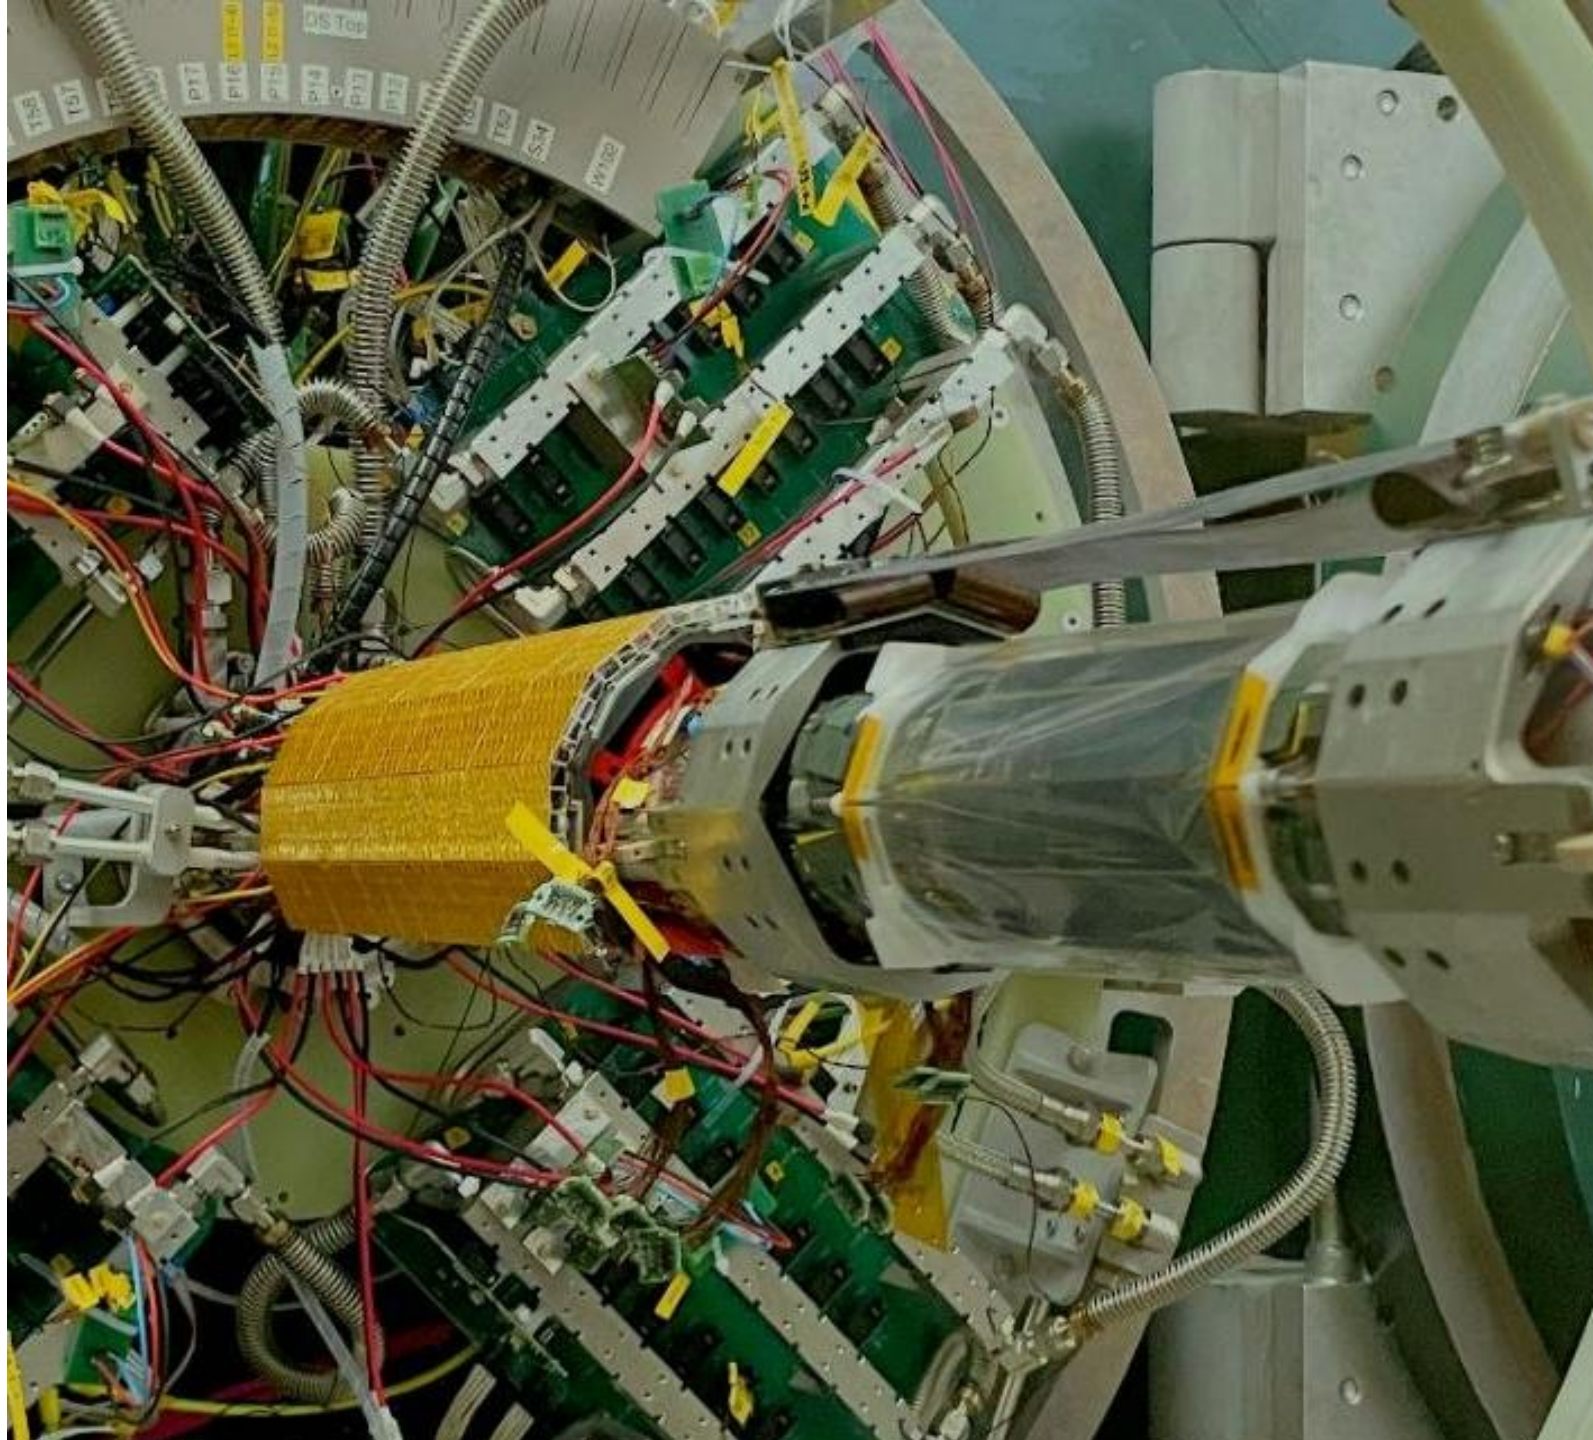

Charge Lepton Flavor Violation

- Lepton flavor violation is experimentally **observed** in the neutral lepton regime (neutrino oscillations)

- Many new Physics Models predict cLFV (e.g SUSY)
  - Any observation of cLFV is a clear sign of **new physics**

- Heavily **suppressed** in the SM + neutrino mixing
  - $\Gamma \propto \left(\frac{\Delta\ m_\nu^2}{m_W^2}\right)^2 \approx \mathcal{O}(10^{-54})$

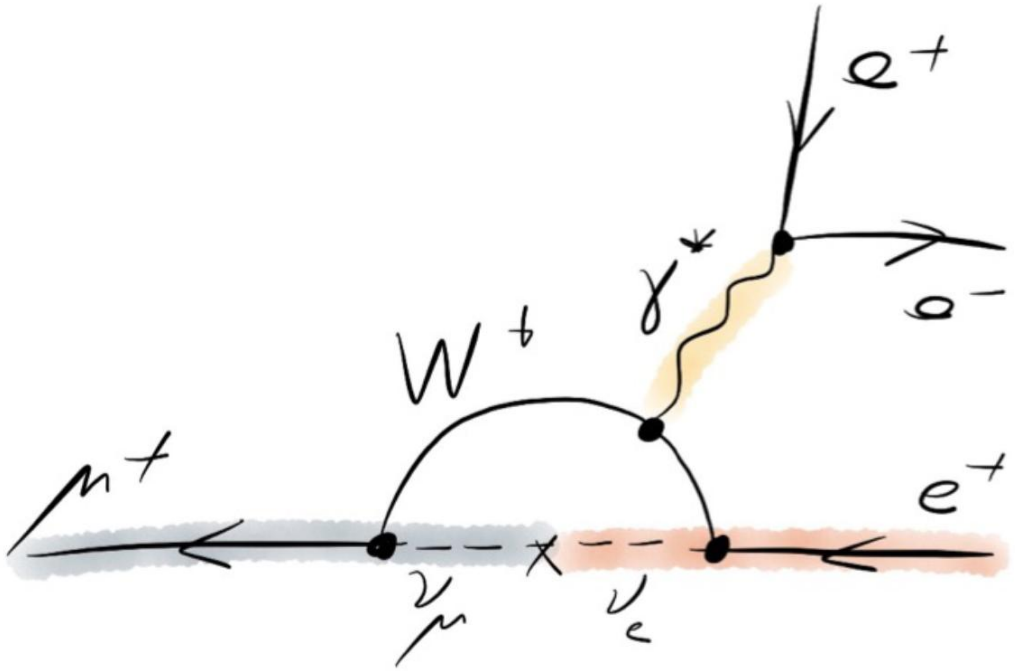

The Mu3e experiment at PSI

The Mu3e Experiment is located at Paul Scherrer Institute in Switzerland

- **Most intense** muon beam with low momentum muons 28MeV
- Up to $\mathbf{10^8}$ Muons/s

Muon production at HIPA

- 590 MeV proton accelerator
- Carbon target, produce pions, decay to surface muons

Goal: Improvement of the current limit by **4 orders** of magnitude in two phases

- **Phase 1** aims for a sensitivity of $< 2.0 \cdot 10^{-15}$ (Start in 2027)
  - First commissioning run in 2025
  - Currently under construction at PSI
- **Phase 2** aims for a sensitivity of $< 1 \cdot 10^{-16}$ (from 2030)
  - High intensity muon beamline **HIMB** (up to 10^{10} Muons/s)
  - R&D started

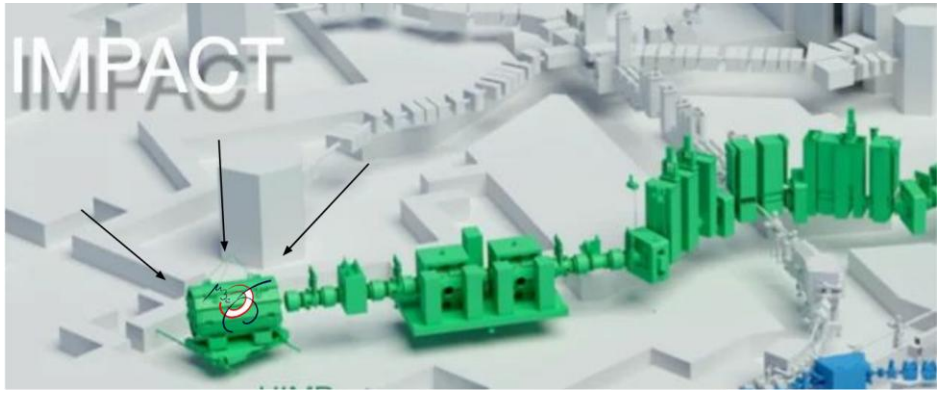

Mu3e Detector

Mu3e magnet

- Superconducting solenoid
- Provides a **uniform 1 T** field
- Enable precise momentum reconstruction

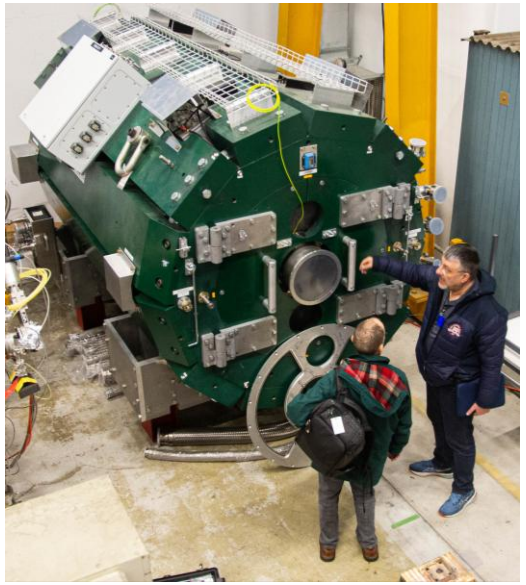

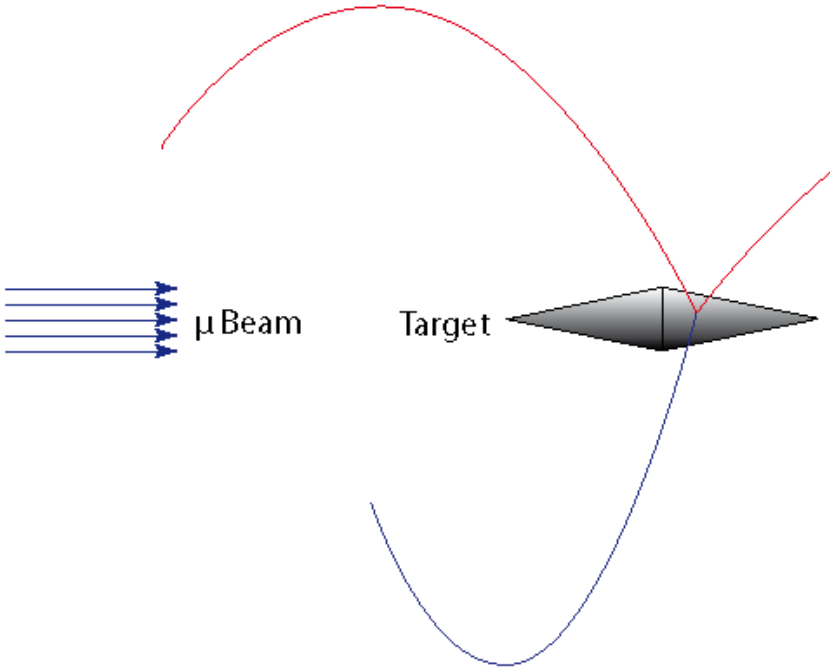

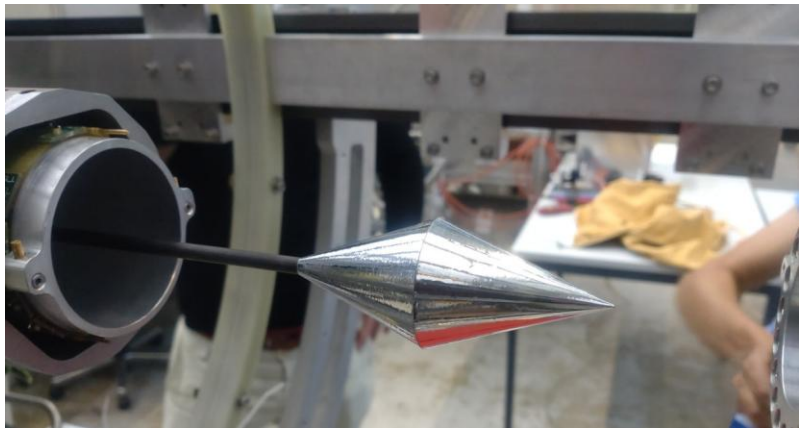

Target

- Muons are stopped on **aluminised mylar** double hollow cone
- Maximum stopping fraction 95%

Pixel Detector

2 Outer Pixel Layers

70µm thin Mupix 11 sensors / Up to 18 sensors per ladder

For good momentum resolution and high p acceptance

→ reconstruction of recurling tracks

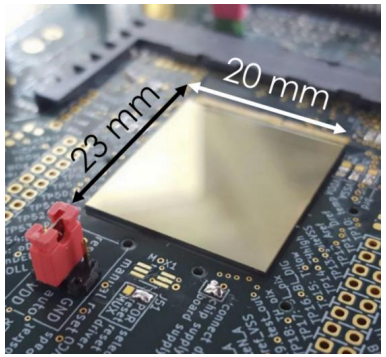

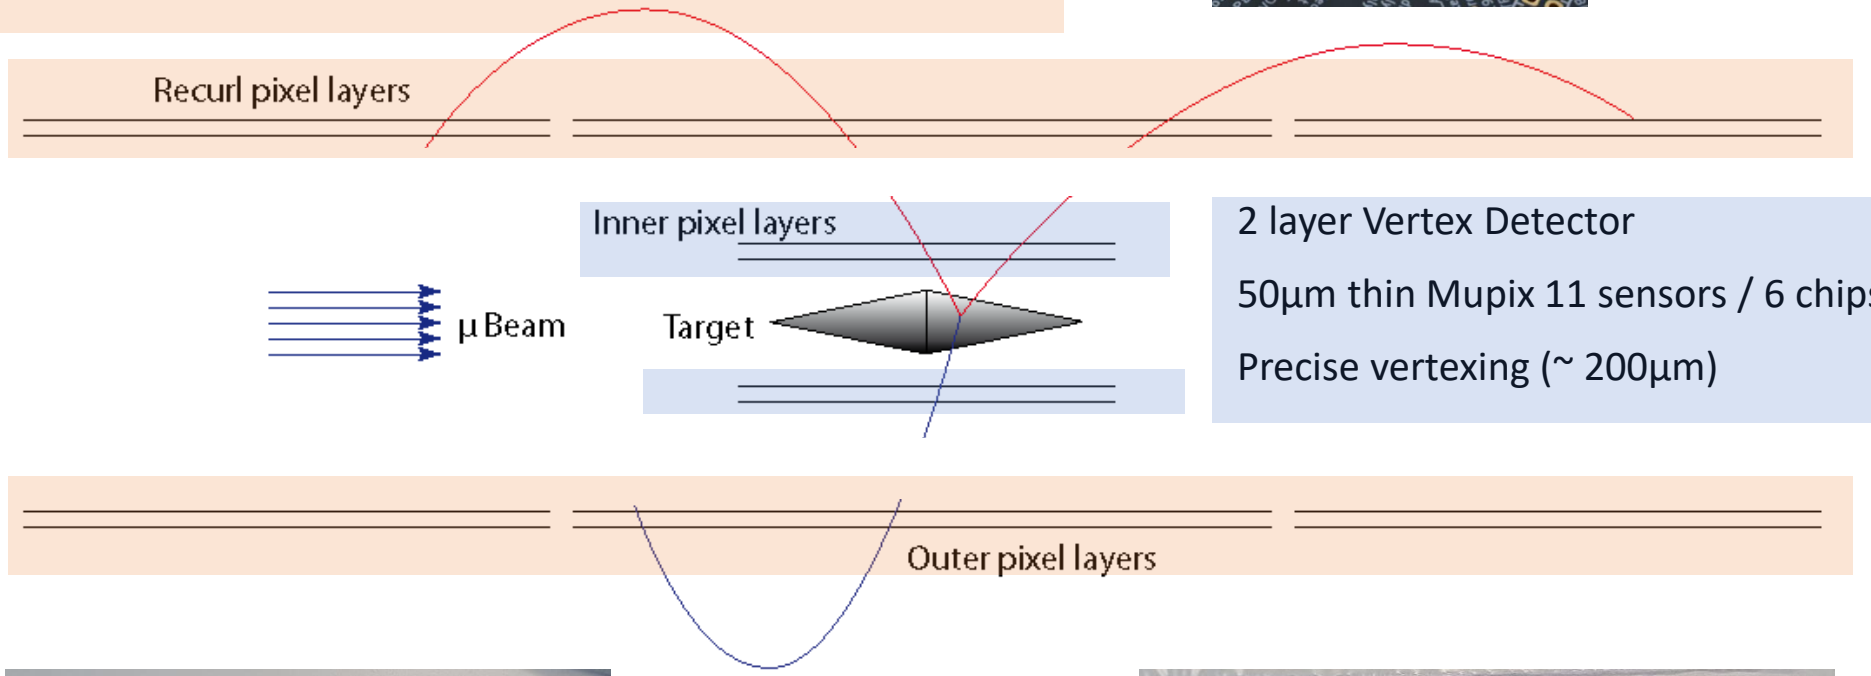

2 layer Vertex Detector

50µm thin Mupix 11 sensors / 6 chips per ladder

Precise vertexing (~ 200µm)

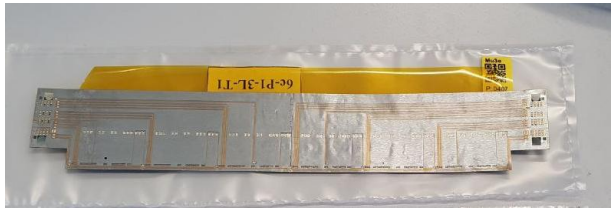

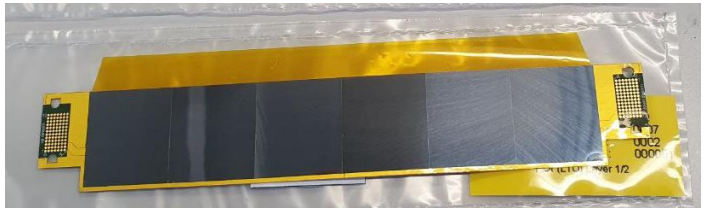

Pixel Detector

2 Outer Pixel Layers

70µm thin Mupix 11 sensors / Up to 18 sensors per ladder

For good momentum resolution and high p acceptance

→ reconstruction of recurling tracks

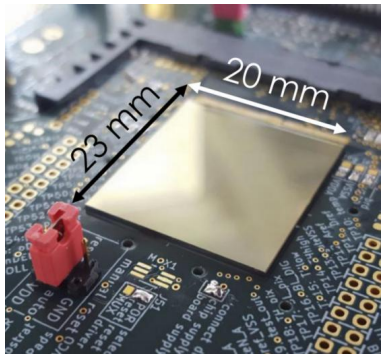

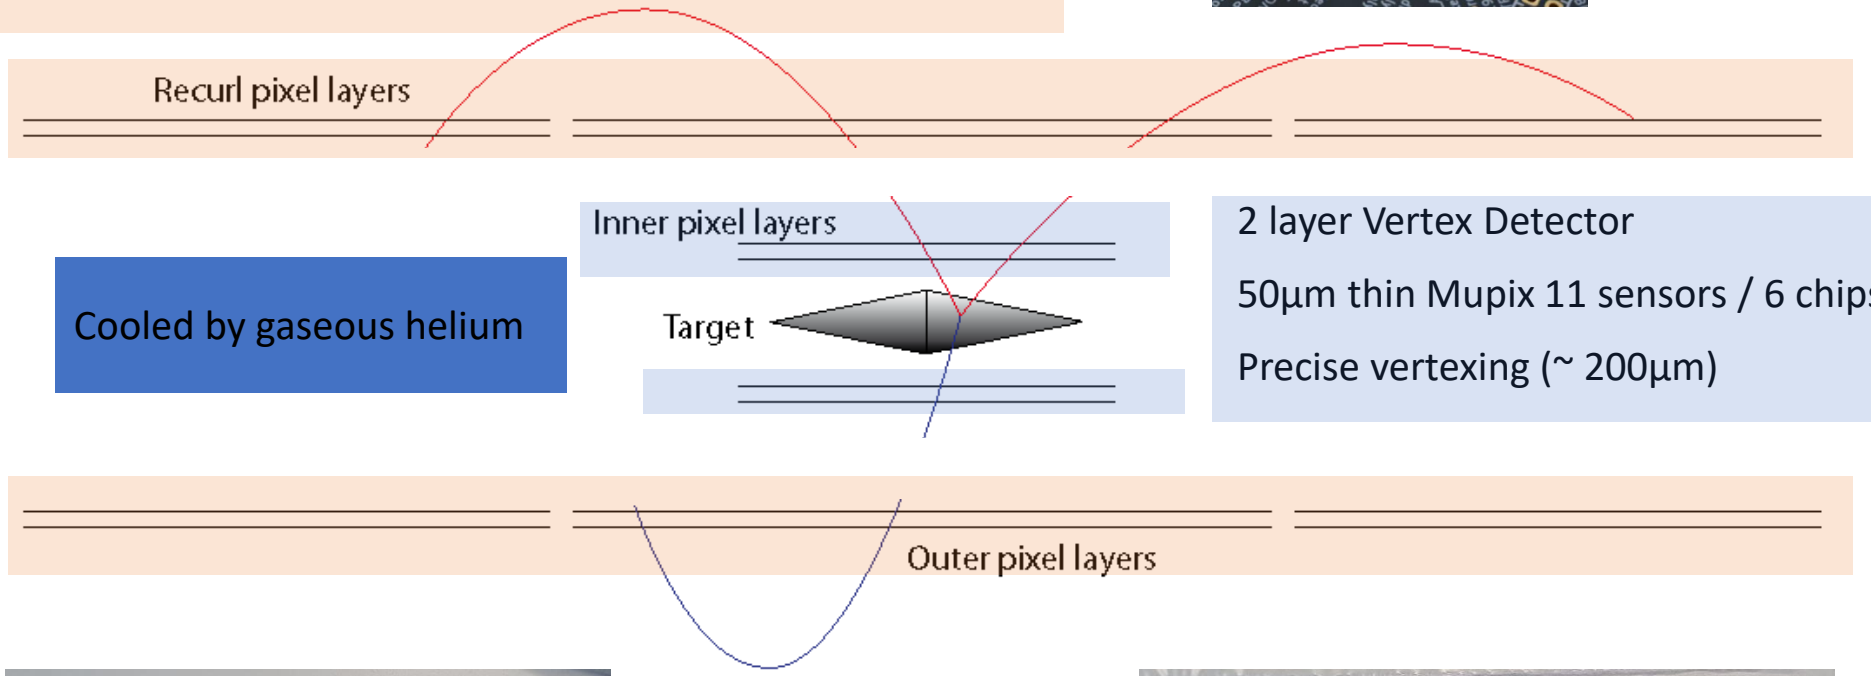

Cooled by gaseous helium

2 layer Vertex Detector

50µm thin Mupix 11 sensors / 6 chips per ladder

Precise vertexing (~ 200µm)

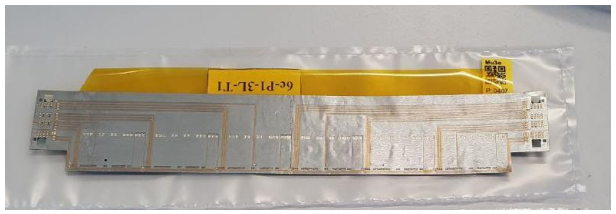

SciFi & SciTile Detector






3 layers of 250µm scintillating fibres
Read-out by (SiPMs) and custom ASIC
Timing resolution < 0.5 ns

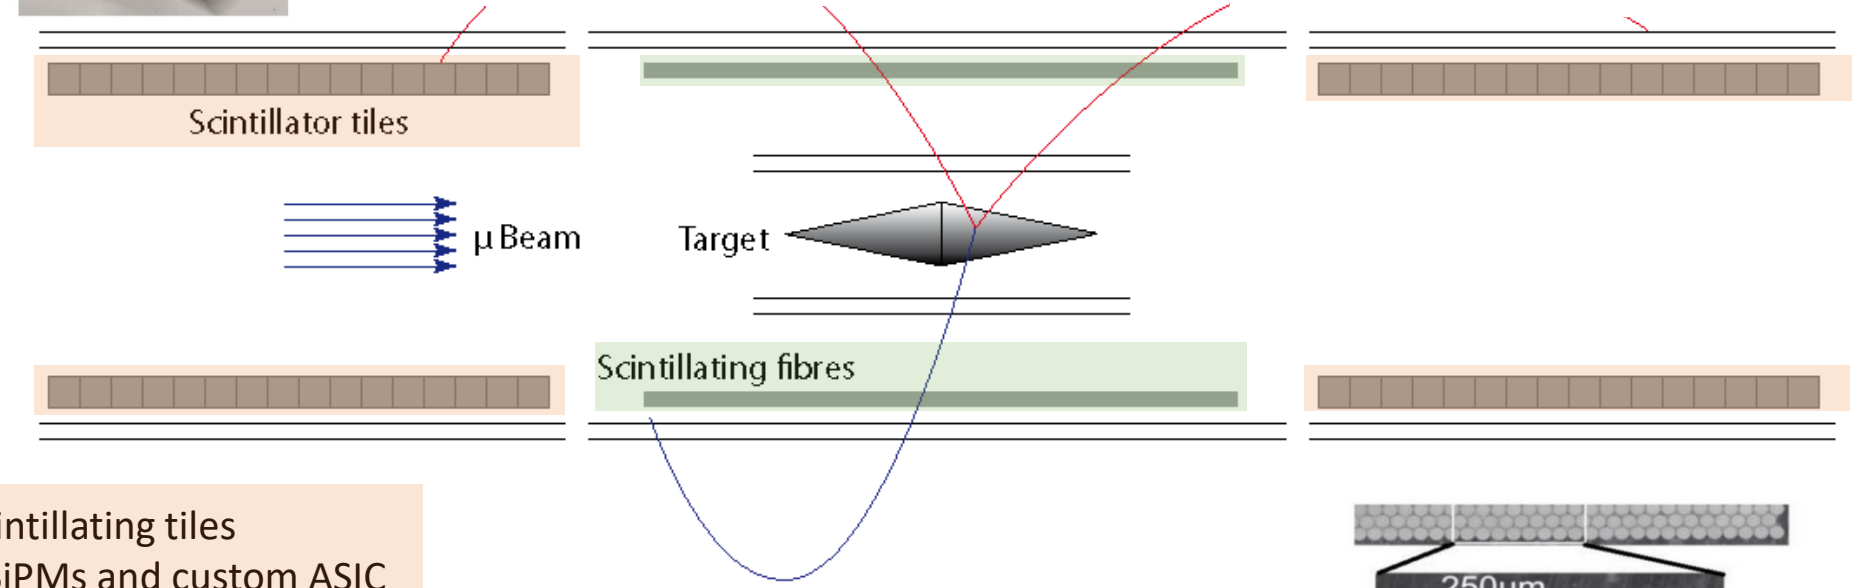

$\approx 0.5\text{cm}^3$ scintillating tiles
Readout by SiPMs and custom ASIC
Timing resolution 80ps

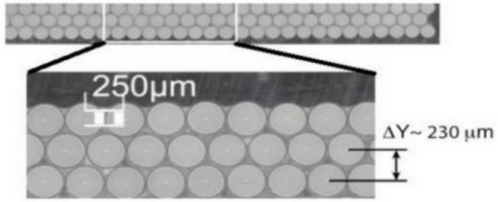

Mupix 11

- High-Voltage Monolithic Active Pixel Sensor (HV-MAPS)
- Detection and Readout combined in one chip
- Fully digital 1.25Gbit/s LVDS output
- 250x256 pixel with a size of 80 x 80 μm^2
- 99% efficiency with less than 20ns time resolution
- 2 comparator design
- Tuning/trimming and masking available
- Chip sub-divided into 3 matrices → 1 data link each + 1 multiplexed link

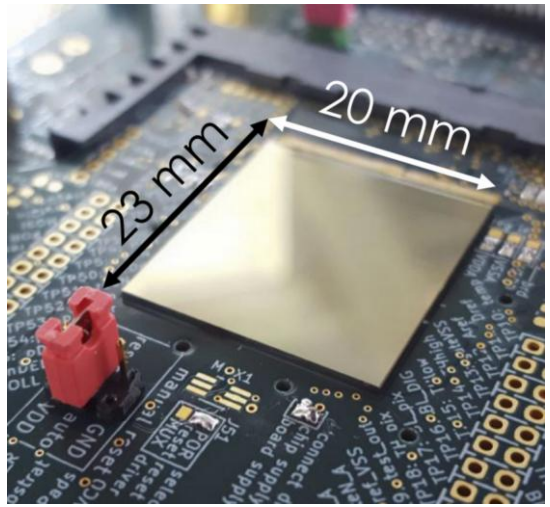

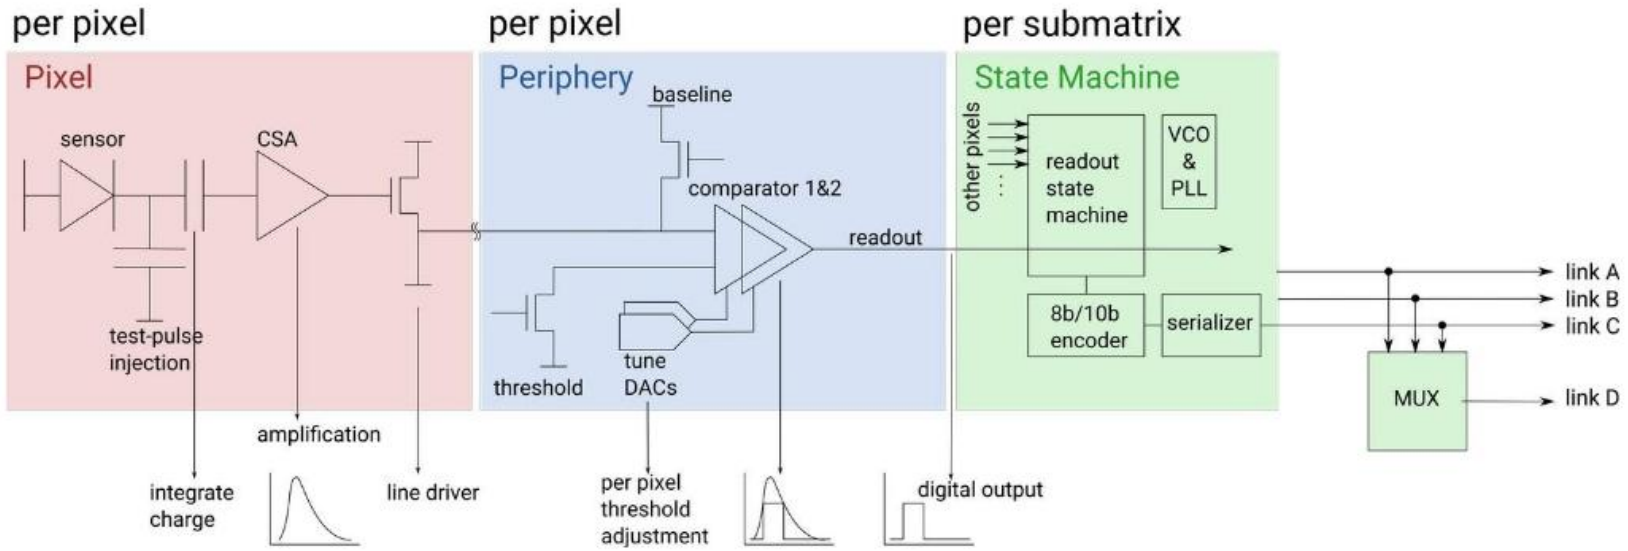

Mu3e Vertex Detector

- 8 or 10 ladders per layers
- Each Ladder carries 6 sensors
- 108 sensors in total
- Mechanical support with minimized material budget
  - Aluminized Kapton interfaces by LTU (X/X_0 ≈ 0.15 % per layer)
  - Sensors glued on foils + spTAB for electrical connection
- DAQ to sensor connection via micro-twisted pair cables and other flexes produced through standard processes

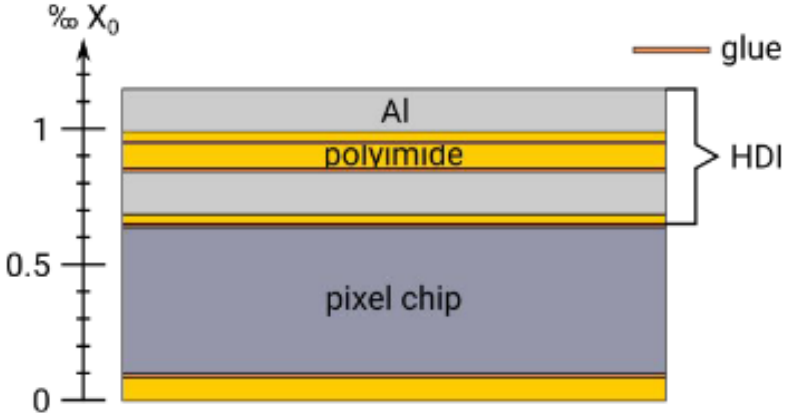

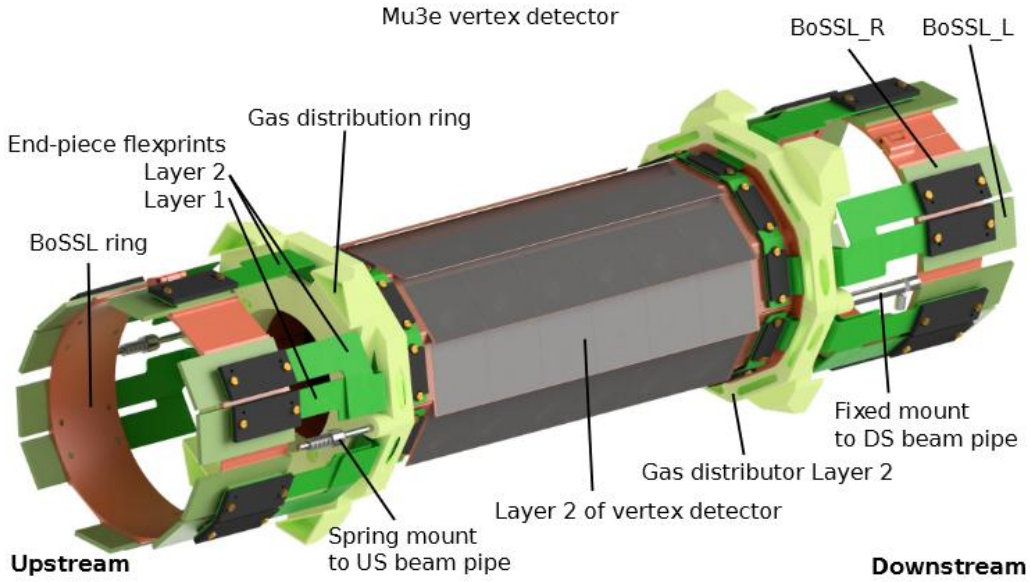

Challenges in the Construction and the Operation of the Mu3e Vertex Detector

Construction and Handling

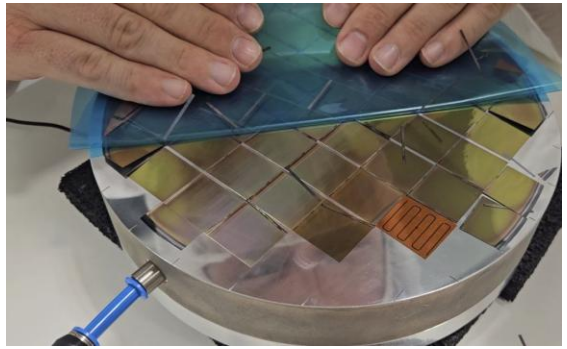

Wafer Peeling + Picking

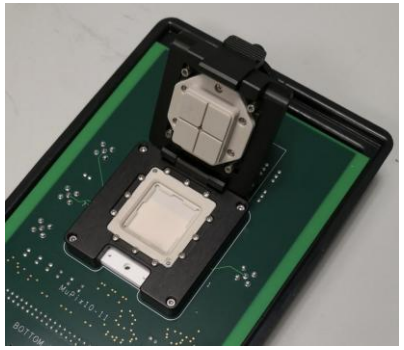

Chip QC

Probe card with manual actuator

Yield of up to 80%

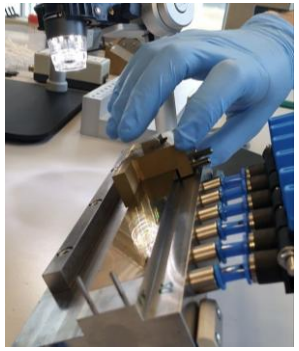

Manual Chip Placement

Glue Distribution

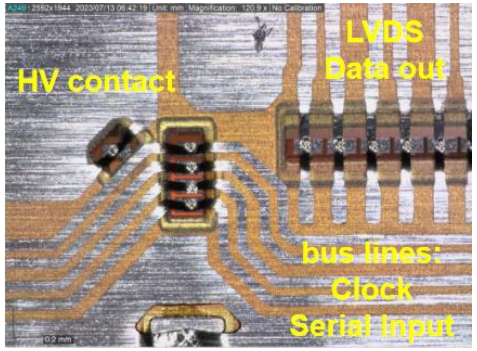

spTa-Bonding

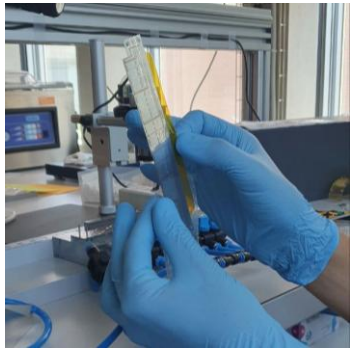

Handling + QC

Signal transmission challenge

- Need to transmit all differential LVDS data over µTP cables
  - Space limitations
  - Used in the CMS experiment at much lower data readout rate
- Huge challenge to transmit data error free
  - Loss of **50%** of signal amplitude at maximum data rate (1.25 Gbit/s)

- Can be partially recovered through the chip internal **pre-emphasis** (VNLVDSDel) and **signal amplification** (VNLVDS)
  - With increase of the preemphasis the eye opening factor increases and signal amplitude decreases
  - Signal amplitude saturates at certain DAC setting point
  - Higher DAC settings increase power consumption of the sensor
- Use full readout chain to characterize each ladder for error free data transmission

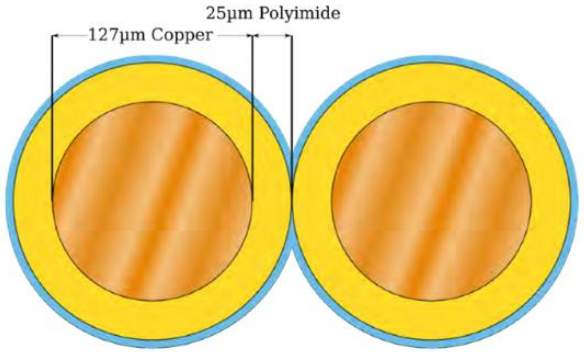

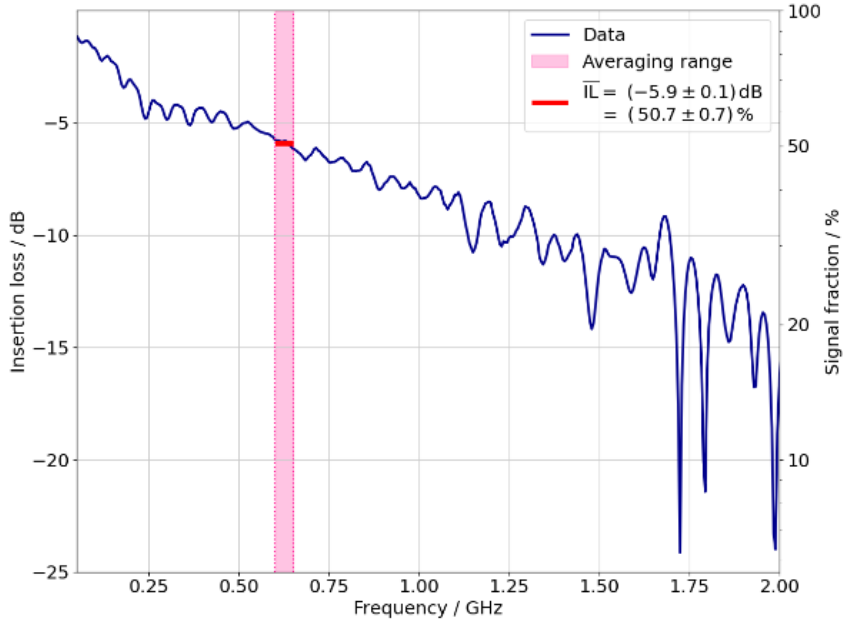

Signal transmission challenge

- Need to transmit all differential LVDS data over µTP cables
  - Space limitations
  - Used in the CMS experiment at much lower data readout rate
- Huge challenge to transmit data error free
  - Loss of **50%** of signal amplitude at maximum data rate (1.25 Gbit/s)

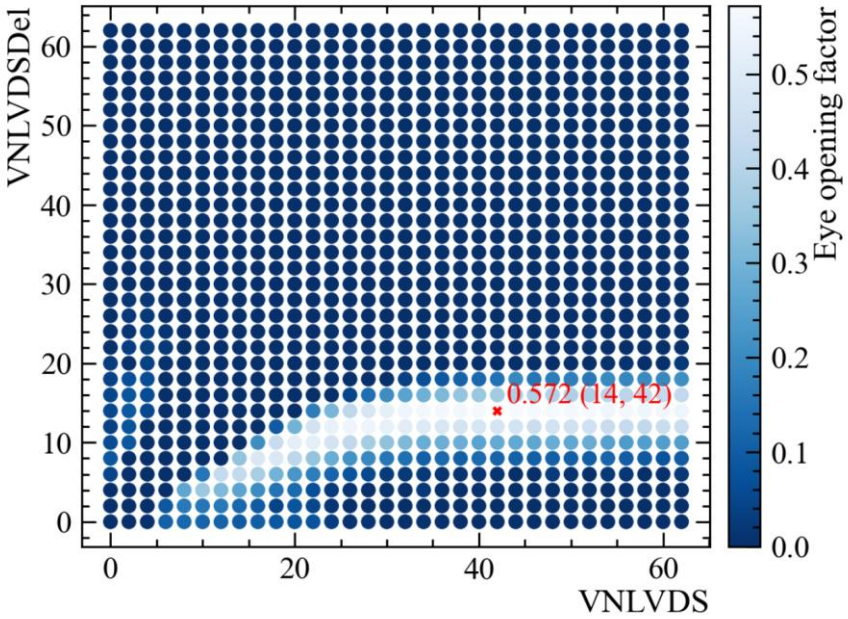

- Can be partially recovered through the chip internal **pre-emphasis** (VNLVDSDel) and **signal amplification** (VNLVDS)
  - With increase of the preemphasis the eye opening factor increases and signal amplitude decreases
  - Signal amplitude saturates at certain DAC setting point
  - Higher DAC settings increase power consumption of the sensor
- Use full readout chain to characterize each ladder for error free data transmission

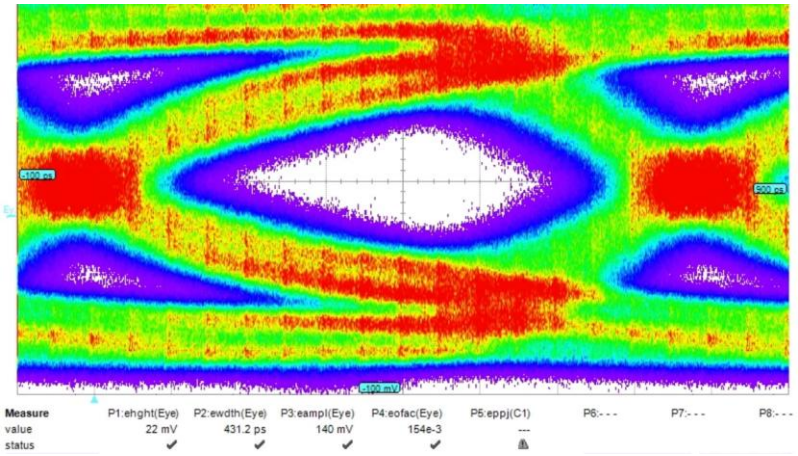

Efficient pixel operation

- Can set a global threshold per chip
  - Set **as low as possible** to detect small pulses
- Only narrow plateau region with >99% efficiency
- 50 µm thin chips show **noisy pixels** at **high thresholds** due to
  - Thinning process
  - Mechanical stress
  - Noise can be induced through the guard ring
- High noise occupancy can cause buffer saturation and data corruption and prevent other pixels from being read out
- Masking of noisy pixels is required but each masked pixel **lowers the total efficiency**

- In-pixel tuning is **essential**
  - Can set threshold adjusting bits **per pixel**
  - Very time extensive to find the best operation settings per sensor

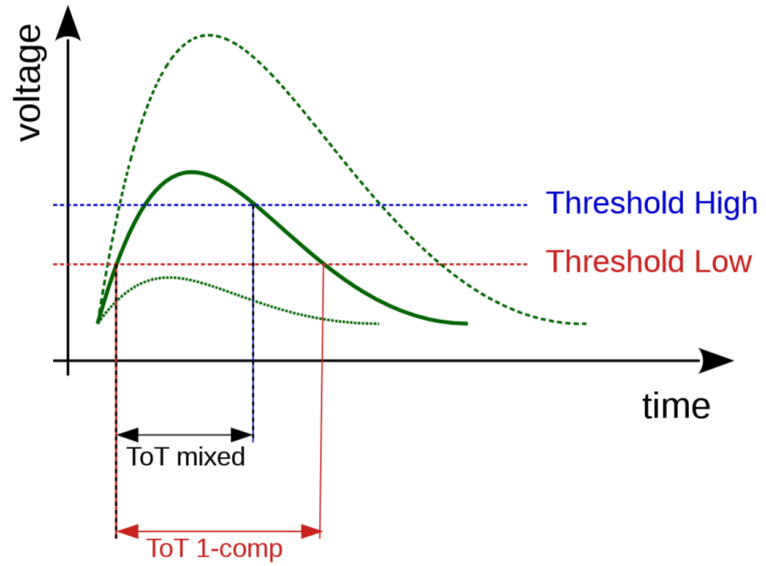

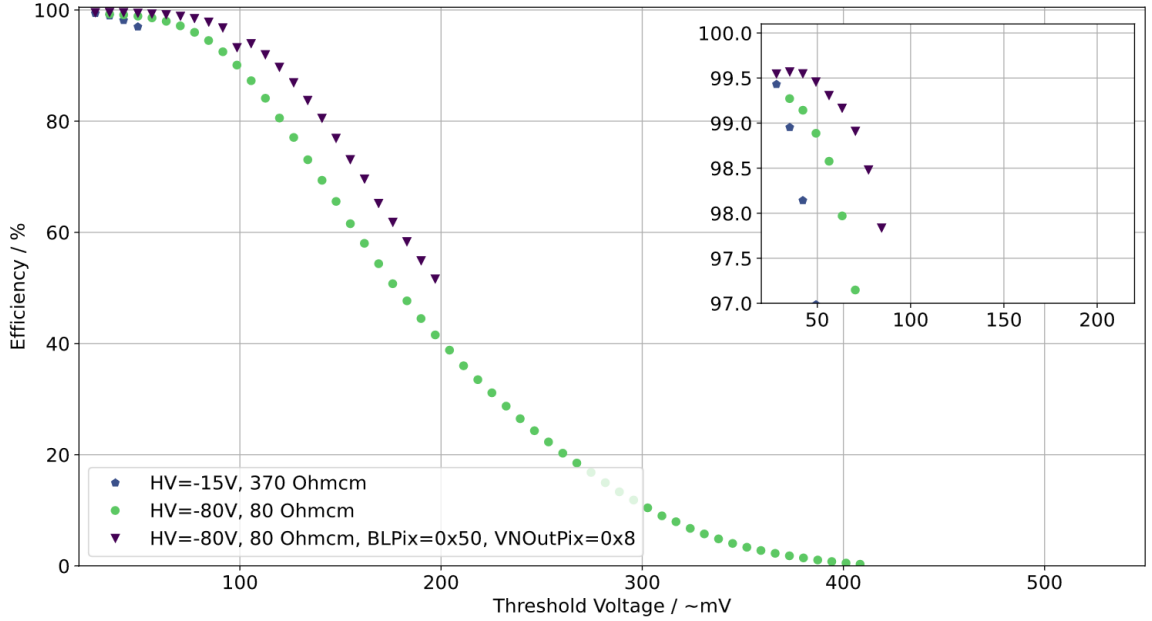

Efficient pixel operation

- Can set a global threshold per chip
  - Set **as low as possible** to detect small pulses
- Only narrow plateau region with >99% efficiency
- 50 µm thin chips show **noisy pixels** at **high thresholds** due to
  - Thinning process
  - Mechanical stress
  - Noise can be induced through the guard ring
- High noise occupancy can cause buffer saturation and data corruption and prevent other pixels from being read out
- Masking of noisy pixels is required but each masked pixel **lowers the total efficiency**

- In-pixel tuning is **essential**
  - Can set threshold adjusting bits **per pixel**
  - Very time extensive to find the best operation settings per sensor

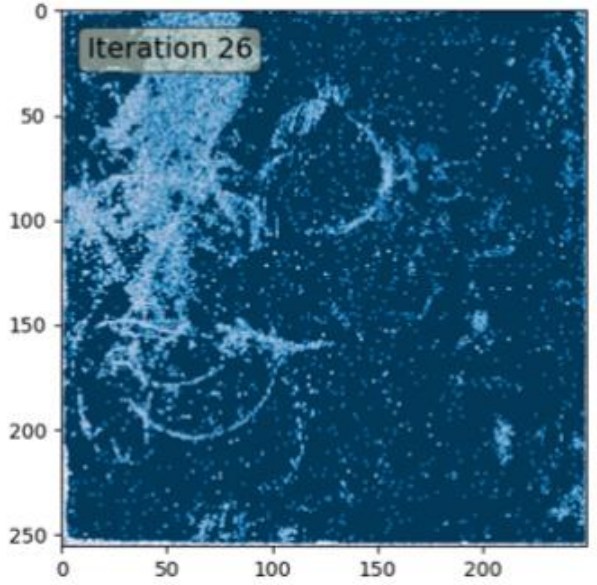

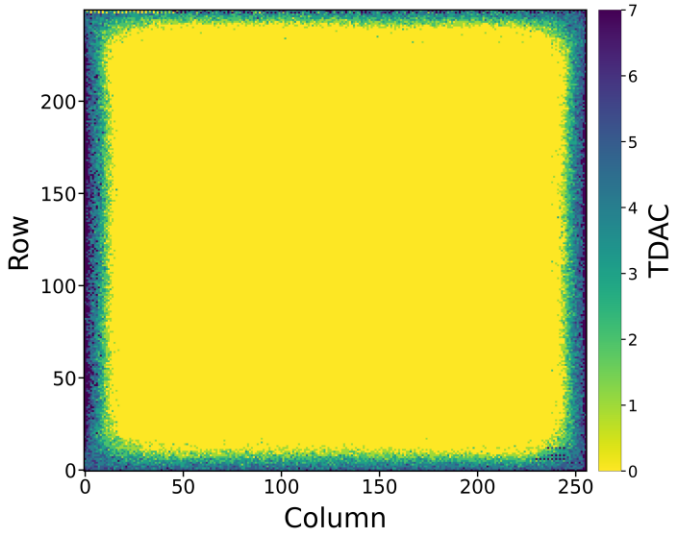

Efficient pixel operation

- Can set a global threshold per chip
  - Set **as low as possible** to detect small pulses
- Only narrow plateau region with >99% efficiency
- 50 µm thin chips show **noisy pixels** at **high thresholds** due to
  - Thinning process
  - Mechanical stress
  - Noise can be induced through the guard ring
- High noise occupancy can cause buffer saturation and data corruption and prevent other pixels from being read out
- Masking of noisy pixels is required but each masked pixel **lowers the total efficiency**
- In-pixel tuning is **essential**
  - Can set threshold adjusting bits **per pixel**
  - Very time extensive to find the best operation settings per sensor

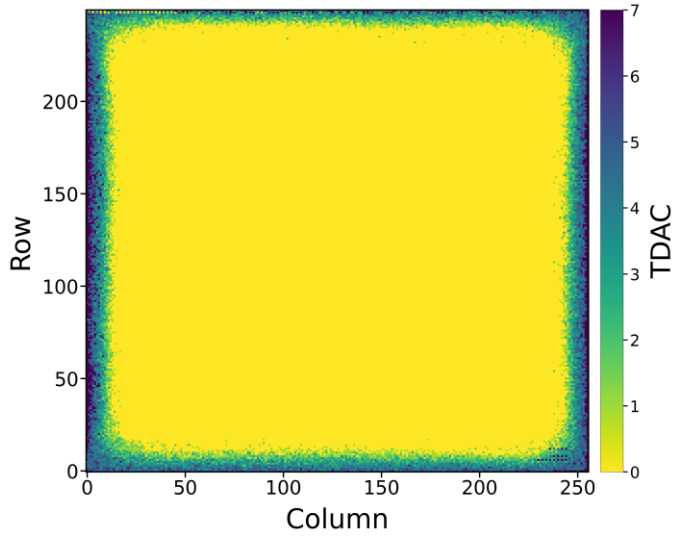

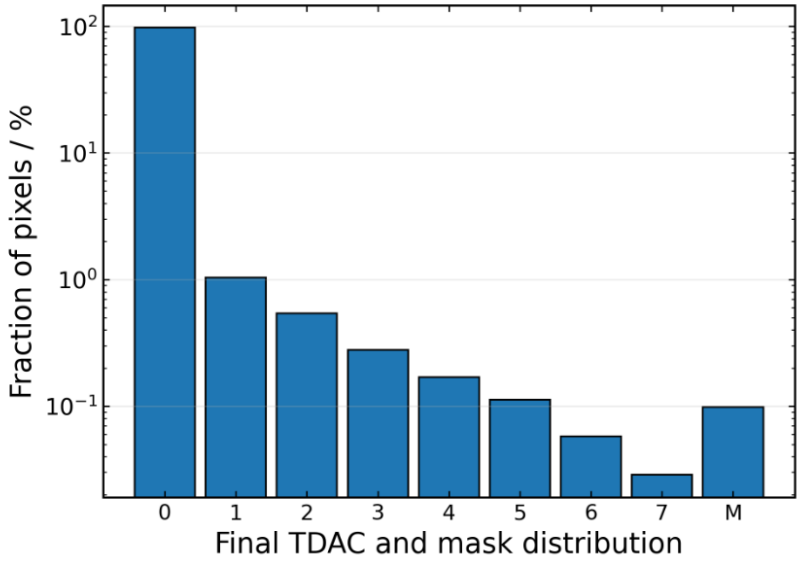

Efficient pixel operation

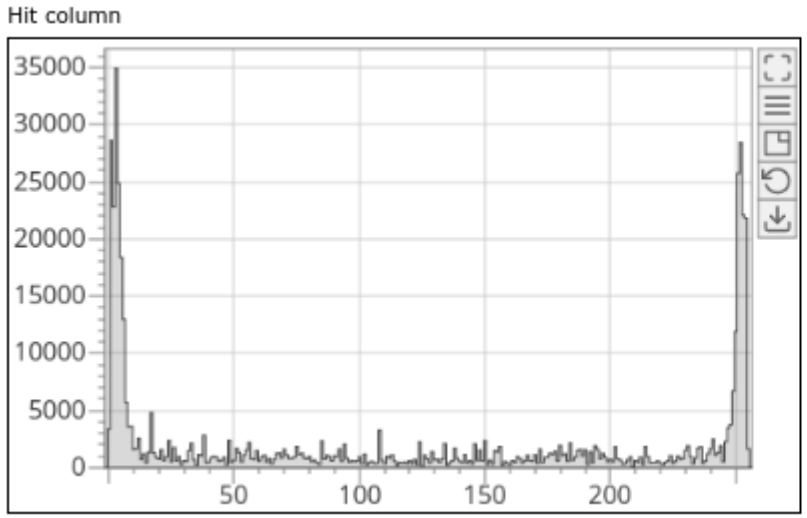

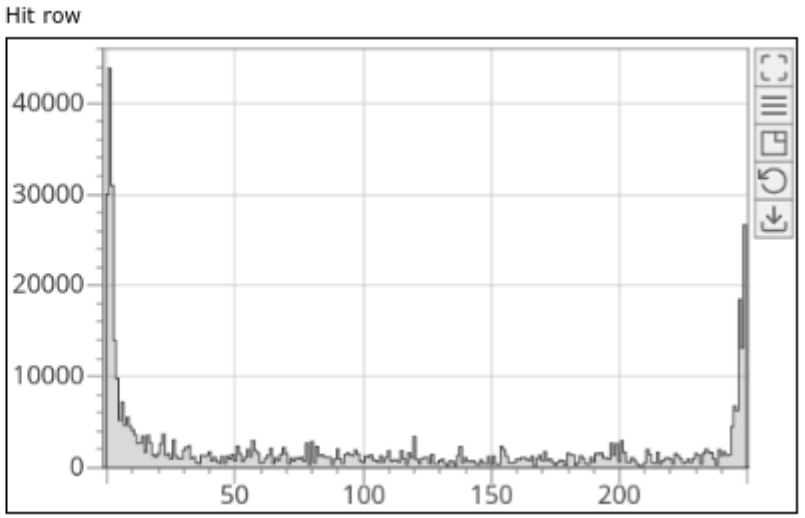

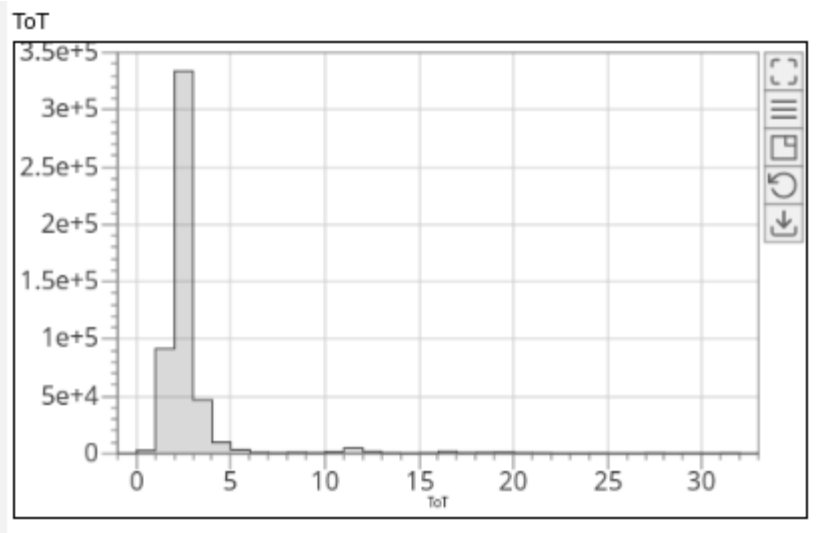

Before Tuning/Masking

- Noise at the edges fully dominates
- Only noise peak visible in ToT

Efficient pixel operation

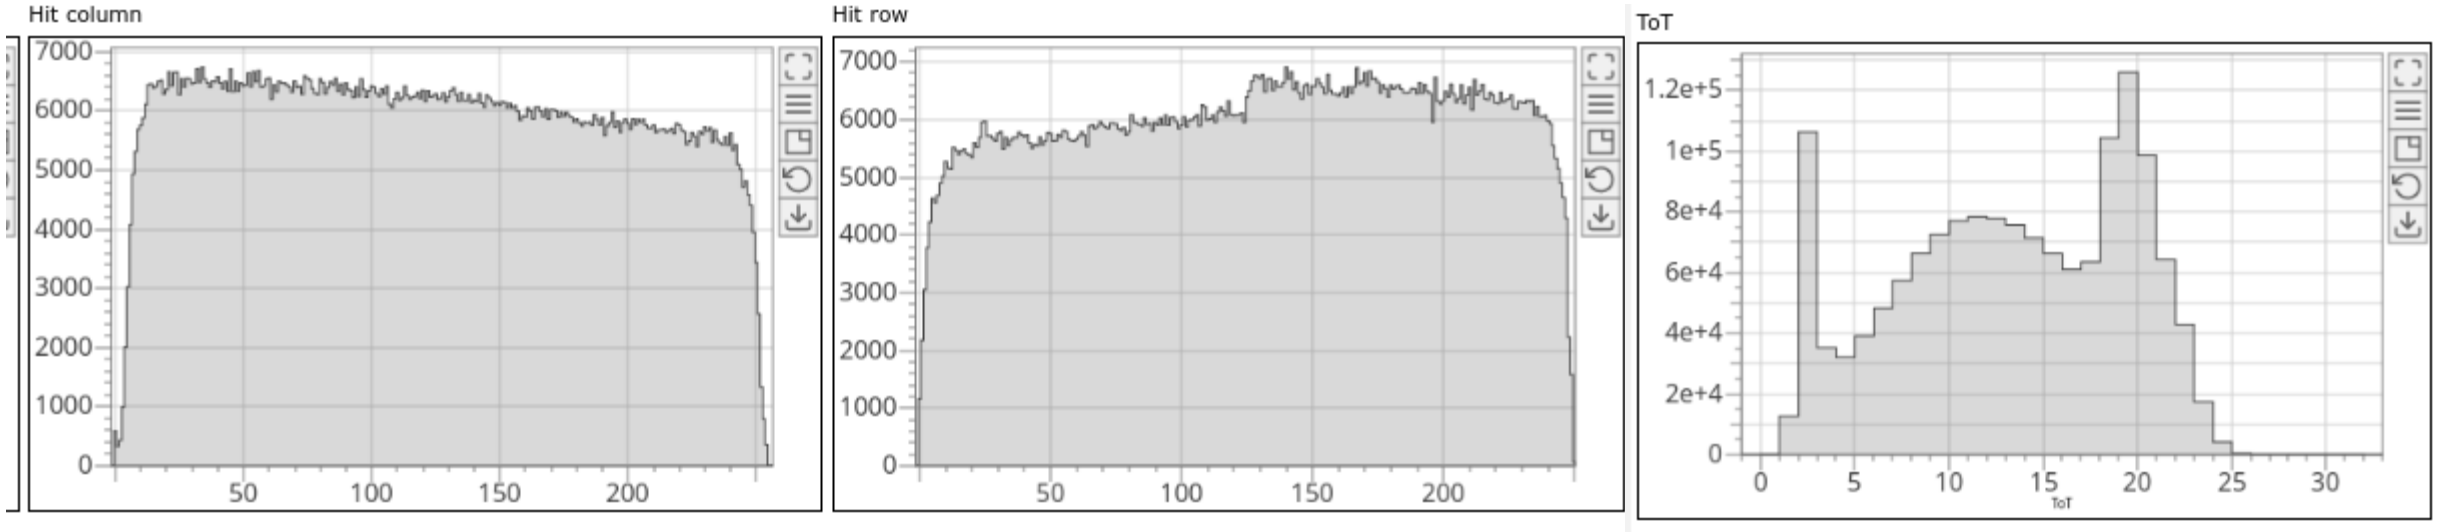

After Tuning/Masking

- Noise at the edges is cut/tuned away
- Noise peak still visible in ToT

Commissioning Run 2025

Three weeks of commissioning run campaign in 2025 at PSI in PiE5

- Minimal detector configuration
- Operation with **gaseous helium cooling**
- 1 T magnetic field
- Most services independent of the sub-system have been installed and tested

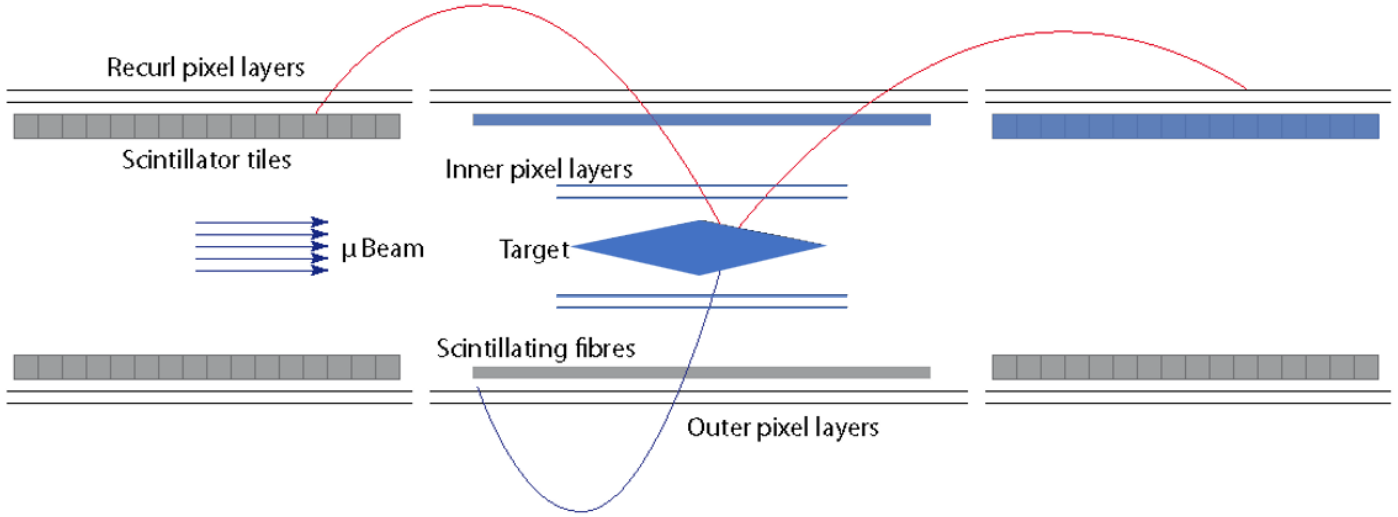

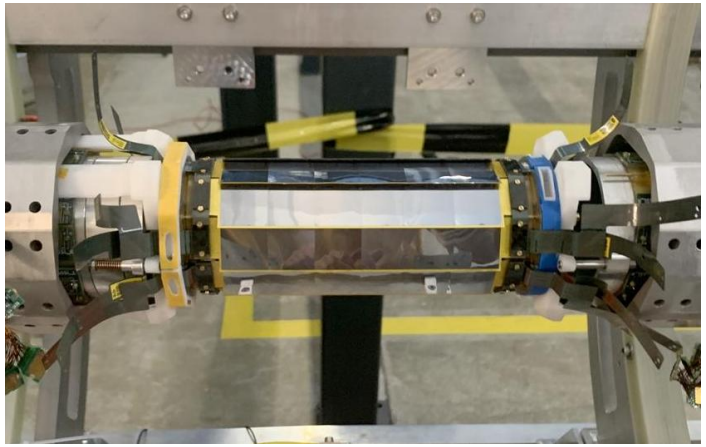

Full Vertex Detector
(108 sensors)

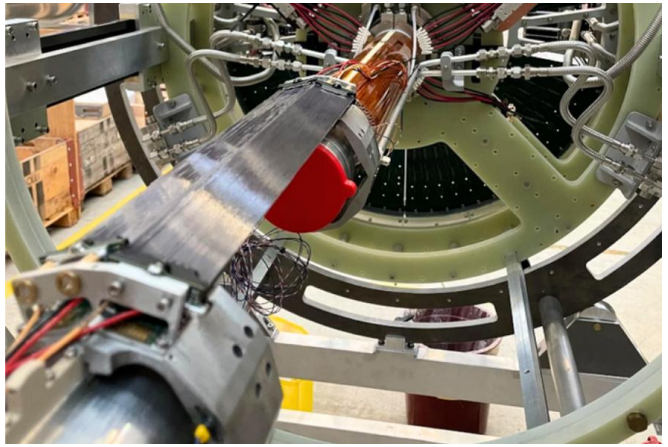

2/12 SciFi ribbons

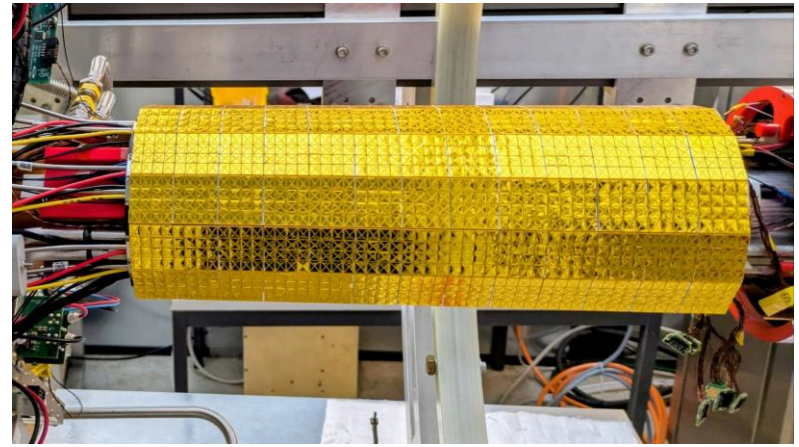

3/14 SciTile modules (DS)

University of Zurich[UZH]

Service Installation

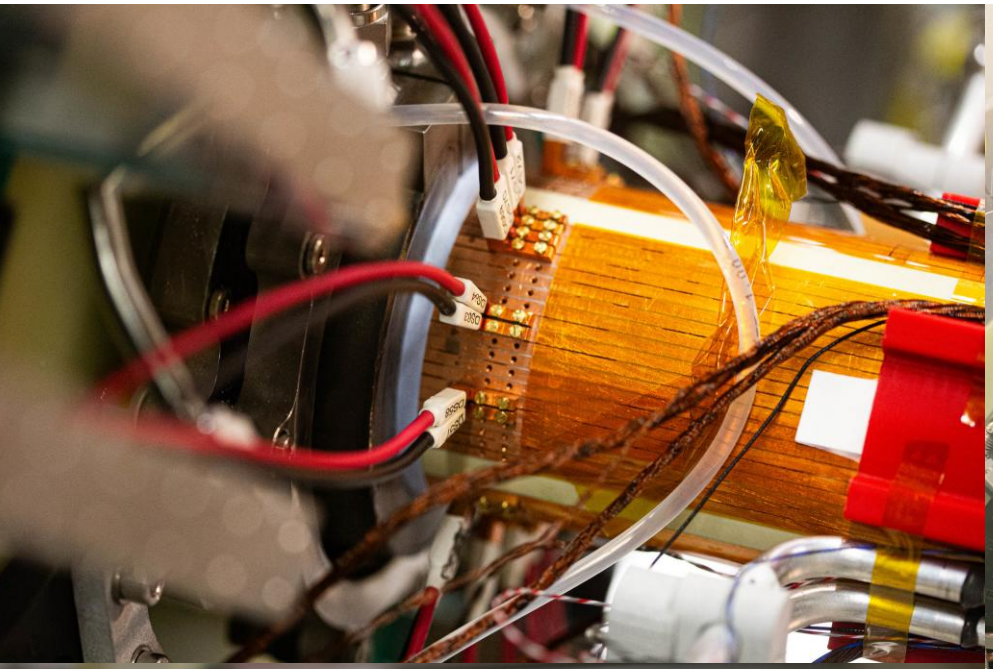

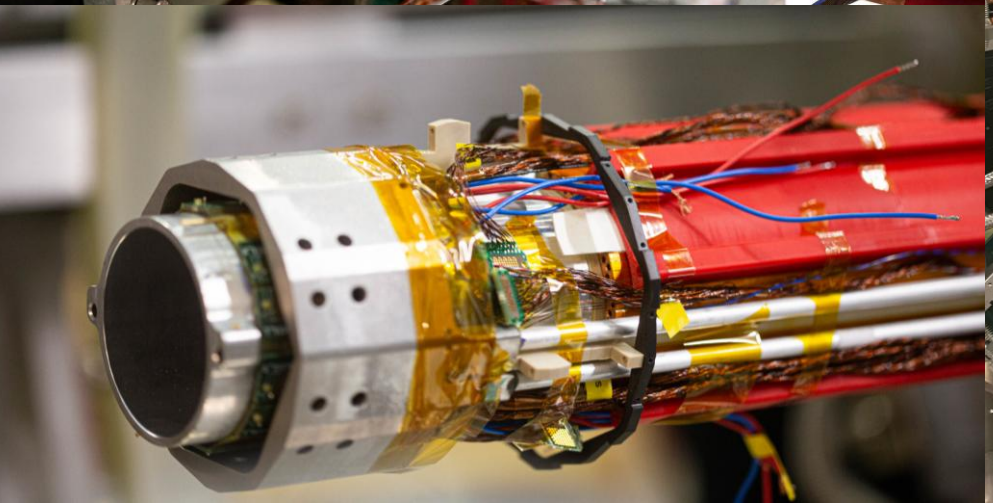

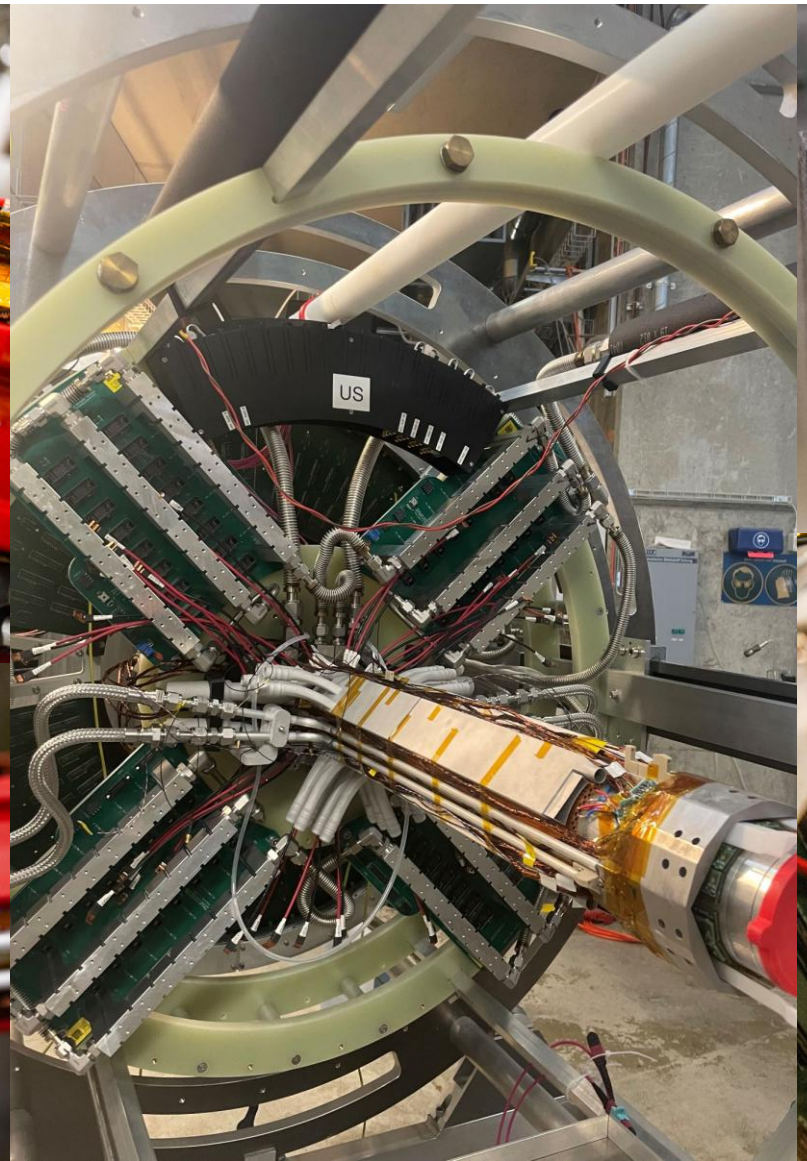

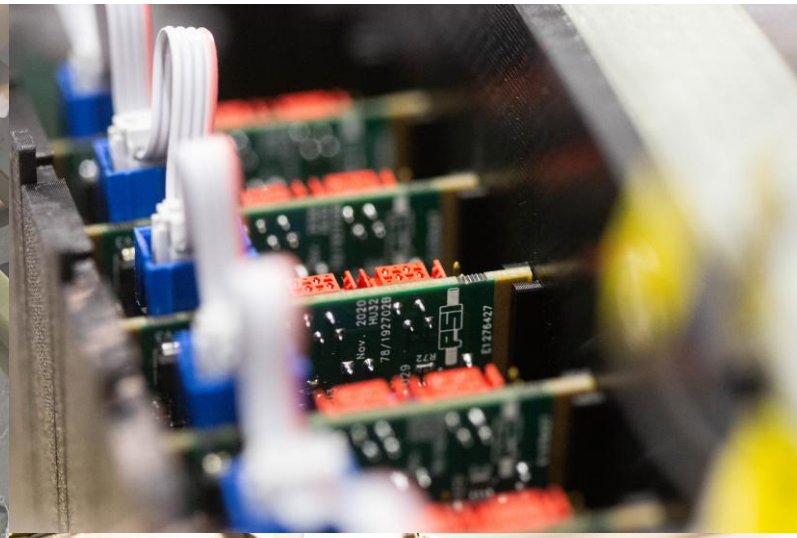

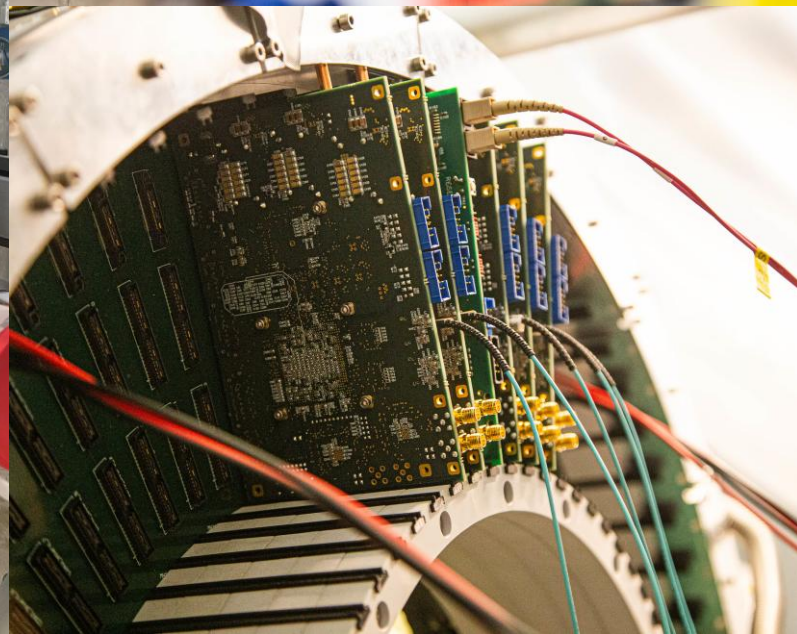

The flight of Mu3e

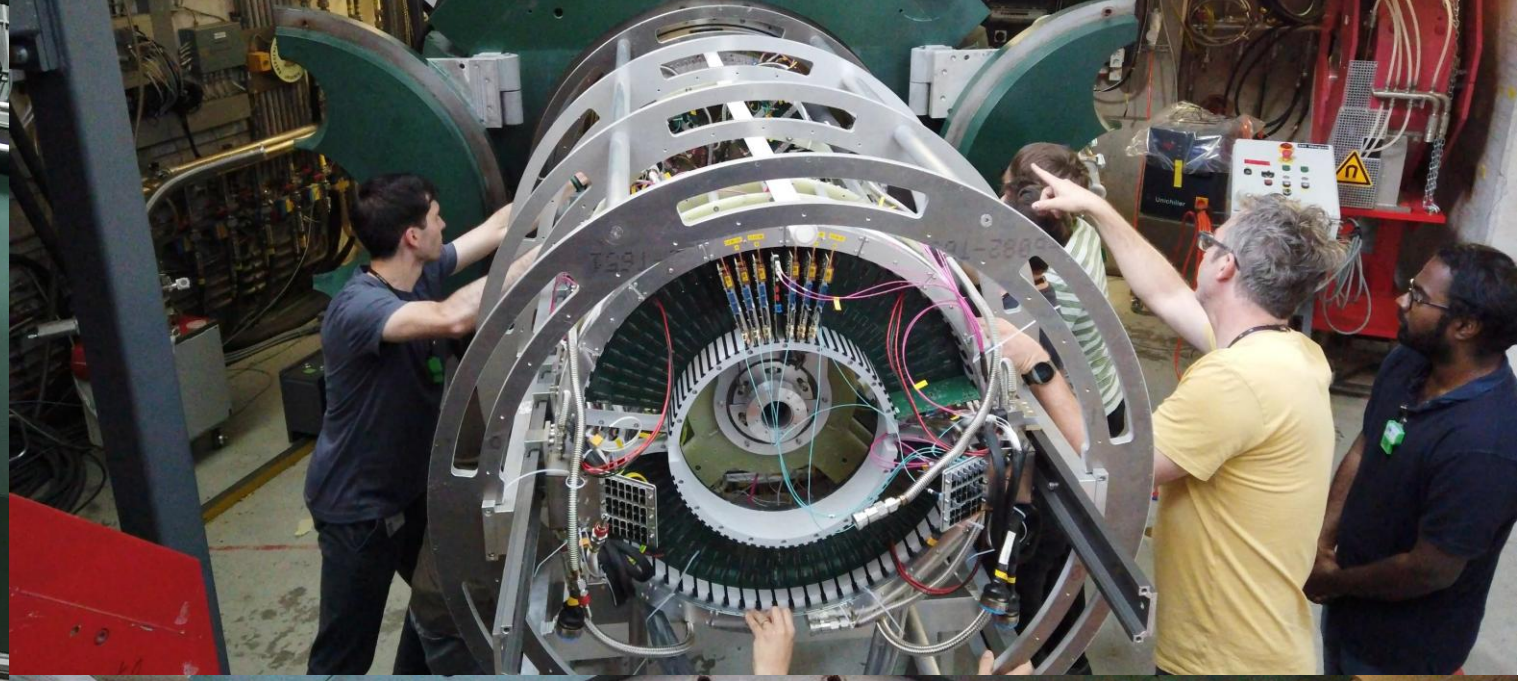

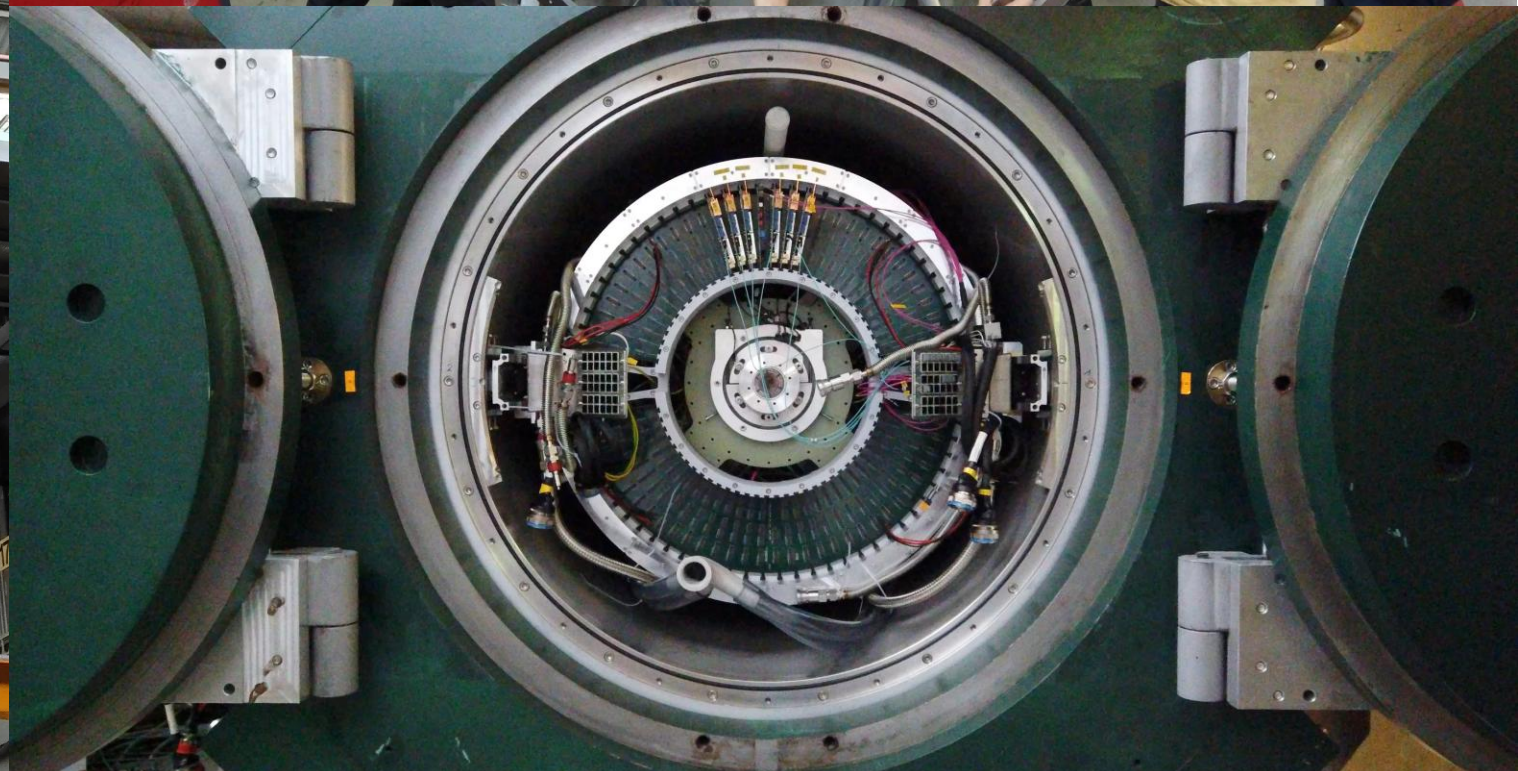

Successful Commissioning of the Mu3e Vertex Detector

- **Thinnest** (0.12% X_0/ layer) **operational vertex detector**
- Demonstrated **efficient** data collection after successful **tuning**
- All 108 sensors installed
  - 75 % of the submatrices were operational

	C1	C2	C3	C4	C5	C6
Ladder 1	✓✓✓	✓✓✓	✓✓✓	✓✓X	✓✓✓	✓✓✓
Ladder 2	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓
Ladder 3	✓✓X	✓✓✓	✓✓✓	XXX	XXX	XXX
Ladder 4	XXX	XXX	XXX	✓✓✓	✓✓✓	✓✓M
Ladder 5	✓✓X	✓✓✓	✓✓✓	✓✓✓	✓✓✓	
Ladder 6	X✓✓	✓✓✓	✓X✓	✓✓✓	✓✓X	✓✓✓
Ladder 7	✓✓✓	✓X✓	✓✓✓	XXX	XXX	XXX
Ladder 8	XXX	XXX	XXX	XXX	XXX	XXX

	C1	C2	C3	C4	C5	C6
Ladder 1		✓✓✓	✓✓✓	XXX	XXX	XXX
Ladder 2	XXX	✓✓✓	XXX	✓✓✓	XXX	✓✓✓
Ladder 3	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓X	✓✓✓
Ladder 4	✓✓✓	✓✓✓	✓✓X	✓✓✓	✓✓✓	X✓X
Ladder 5	XXX	X✓X	✓M✓	✓✓✓	✓✓✓	✓✓✓
Ladder 6	✓✓✓	✓✓✓	✓✓✓	X✓✓	✓✓✓	✓✓✓
Ladder 7	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓
Ladder 8	✓X✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓
Ladder 9	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓	✓✓✓
Ladder 10	✓✓✓	XXX	✓✓✓	✓✓✓	✓✓✓	✓✓✓

Successful Commissioning of the Mu3e Vertex Detector

- **Thinnest** (0.12% X_0/ layer) **operational vertex detector**
- Demonstrated **efficient** data collection after successful **tuning**
- All 108 sensors installed
  - 75 % of the submatrices were operational

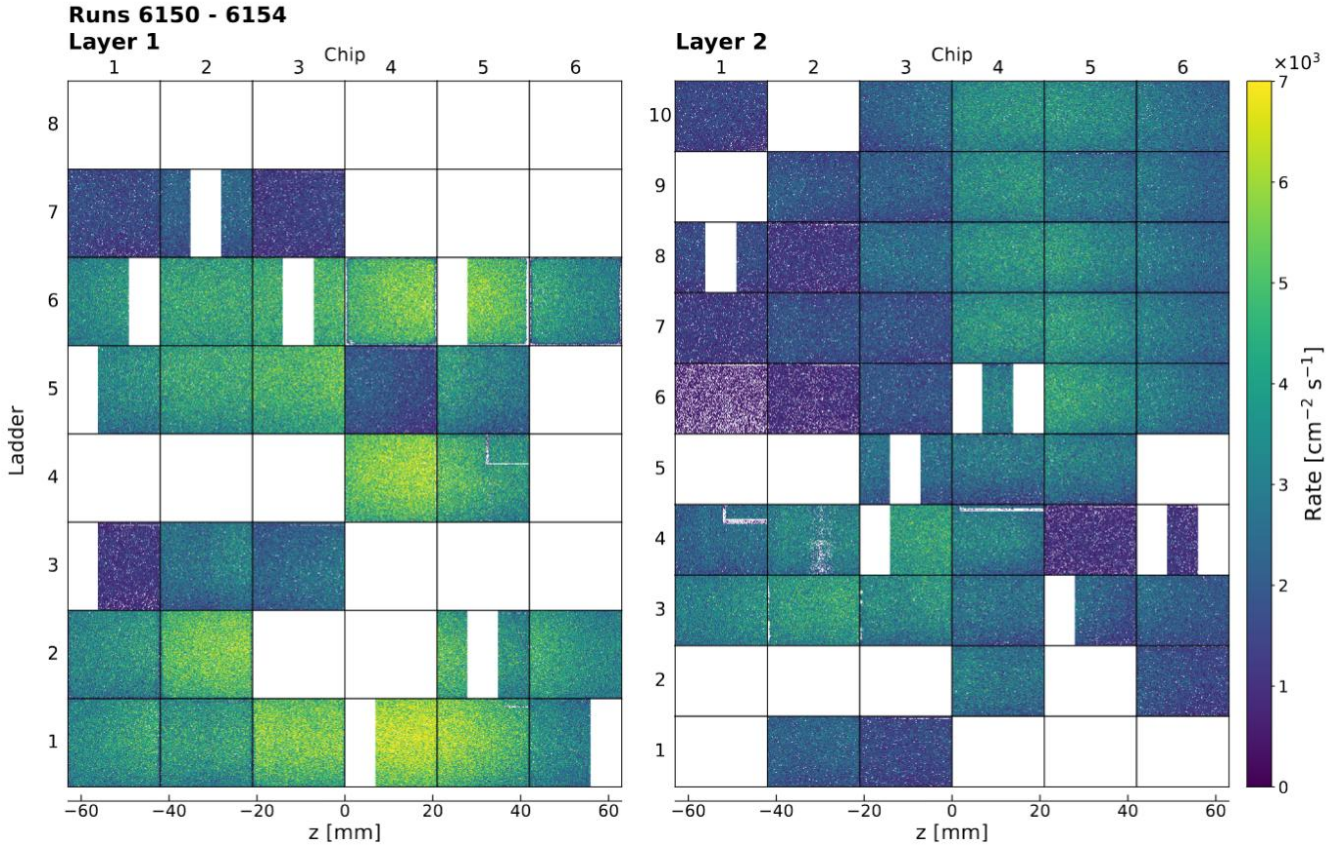

Successful Commissioning of the Mu3e Vertex Detector

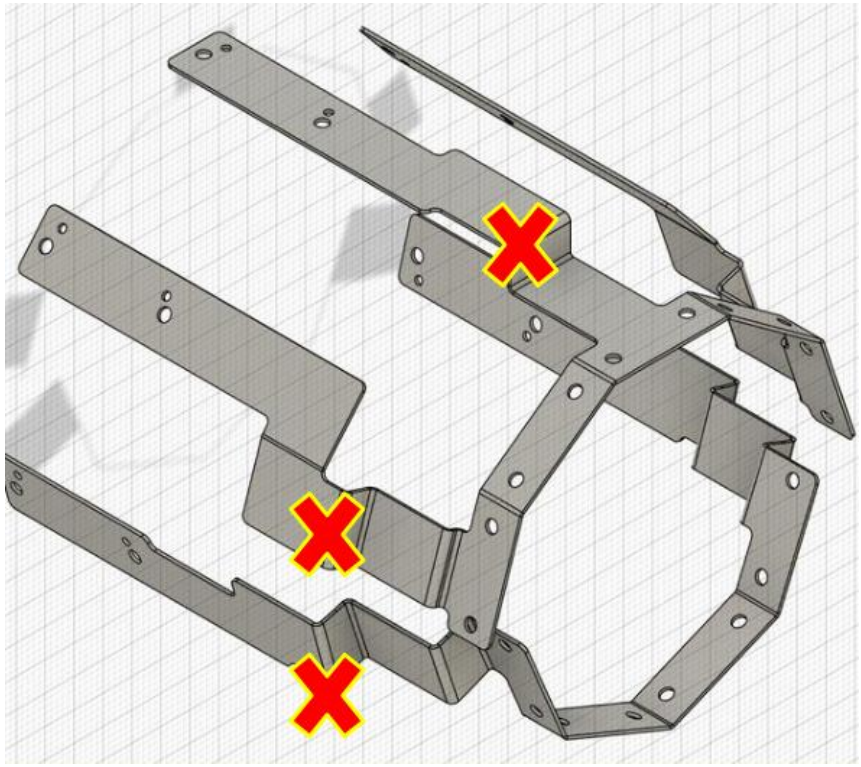

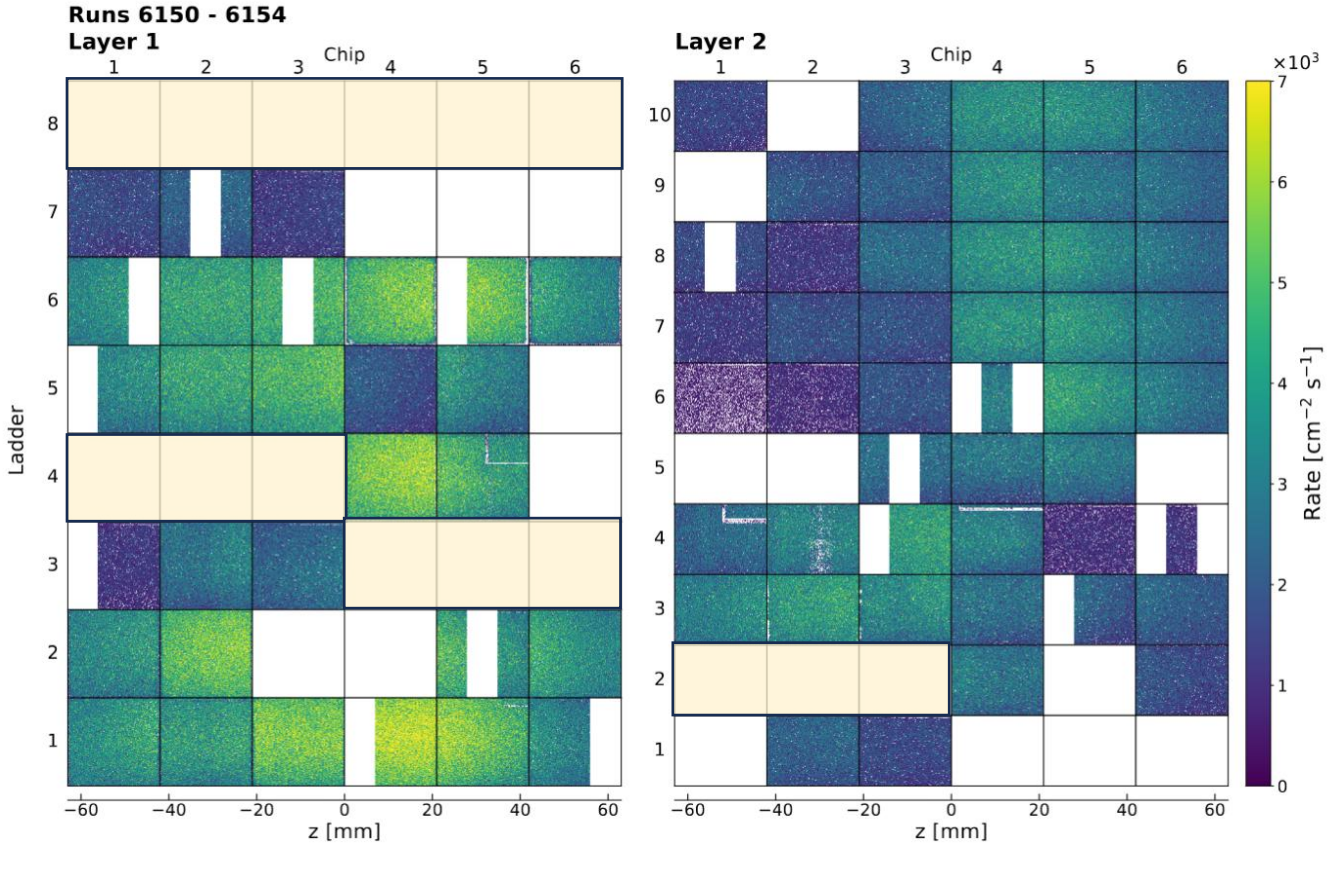

Successful Commissioning of the Mu3e Vertex Detector

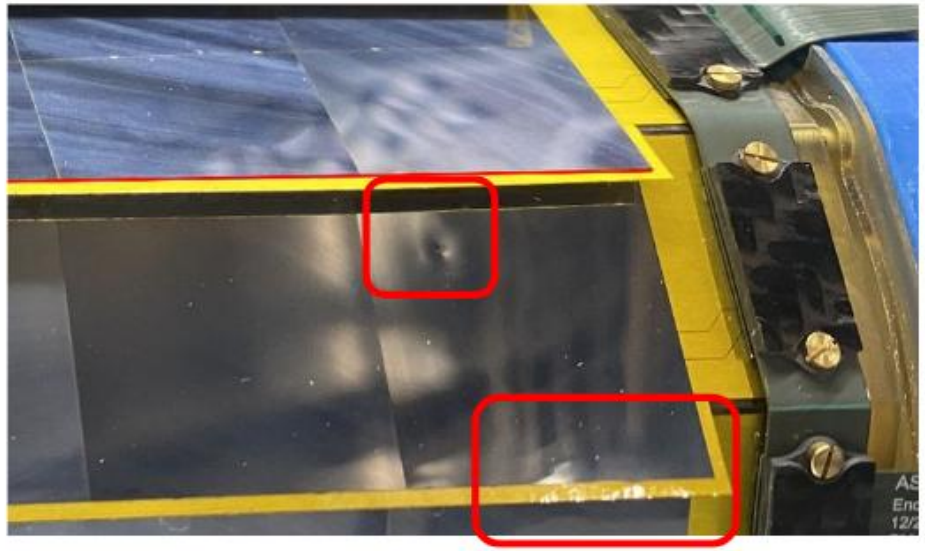

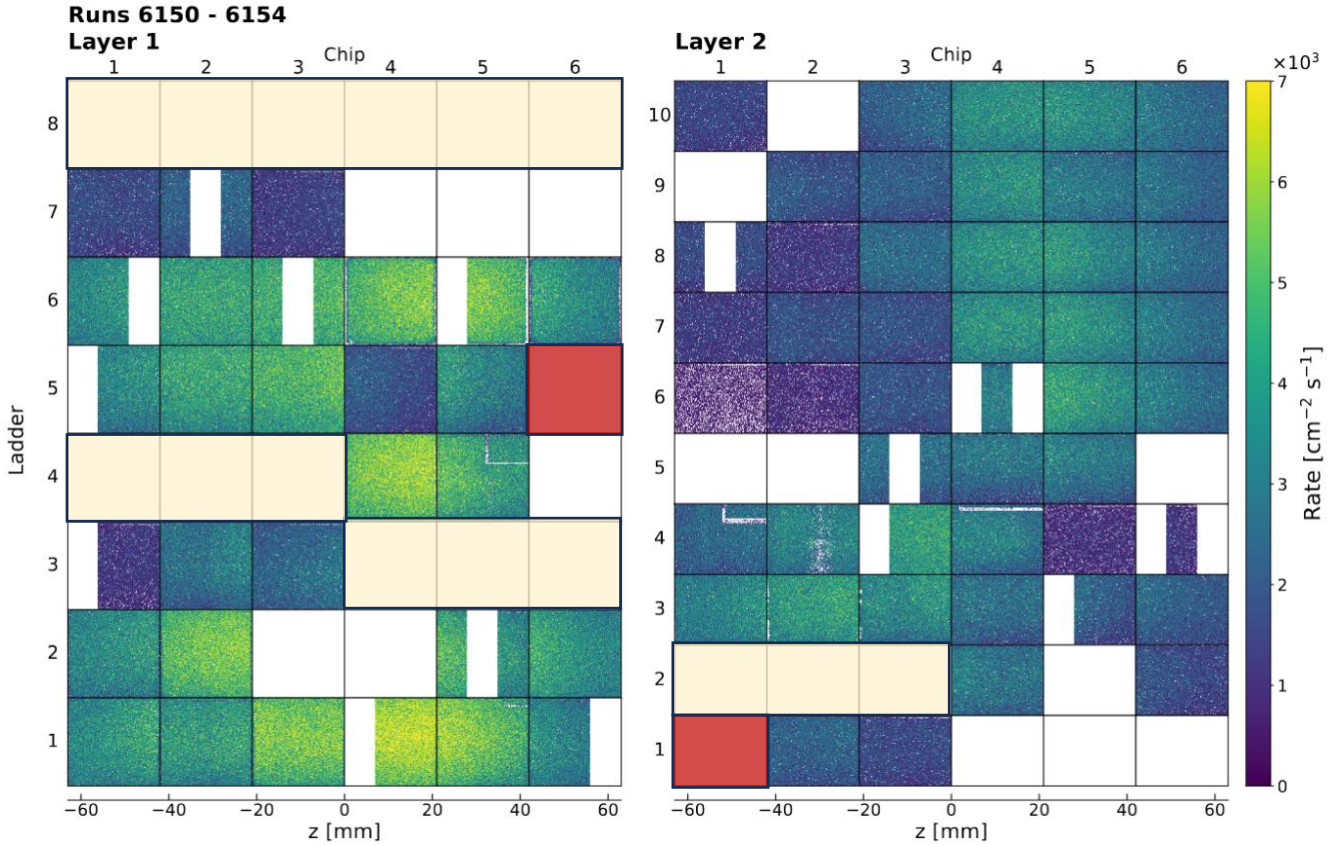

Successful Commissioning of the Mu3e Vertex Detector

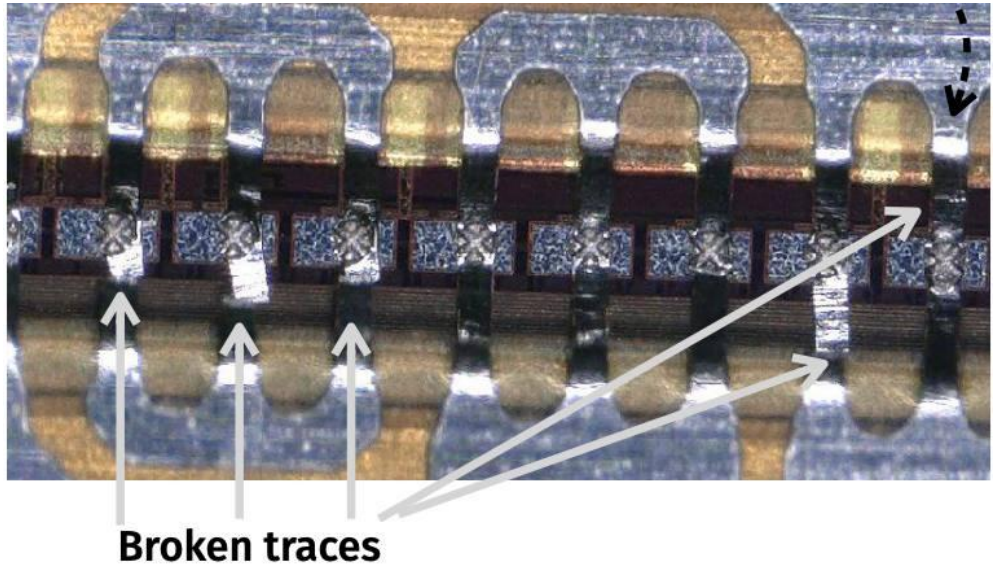

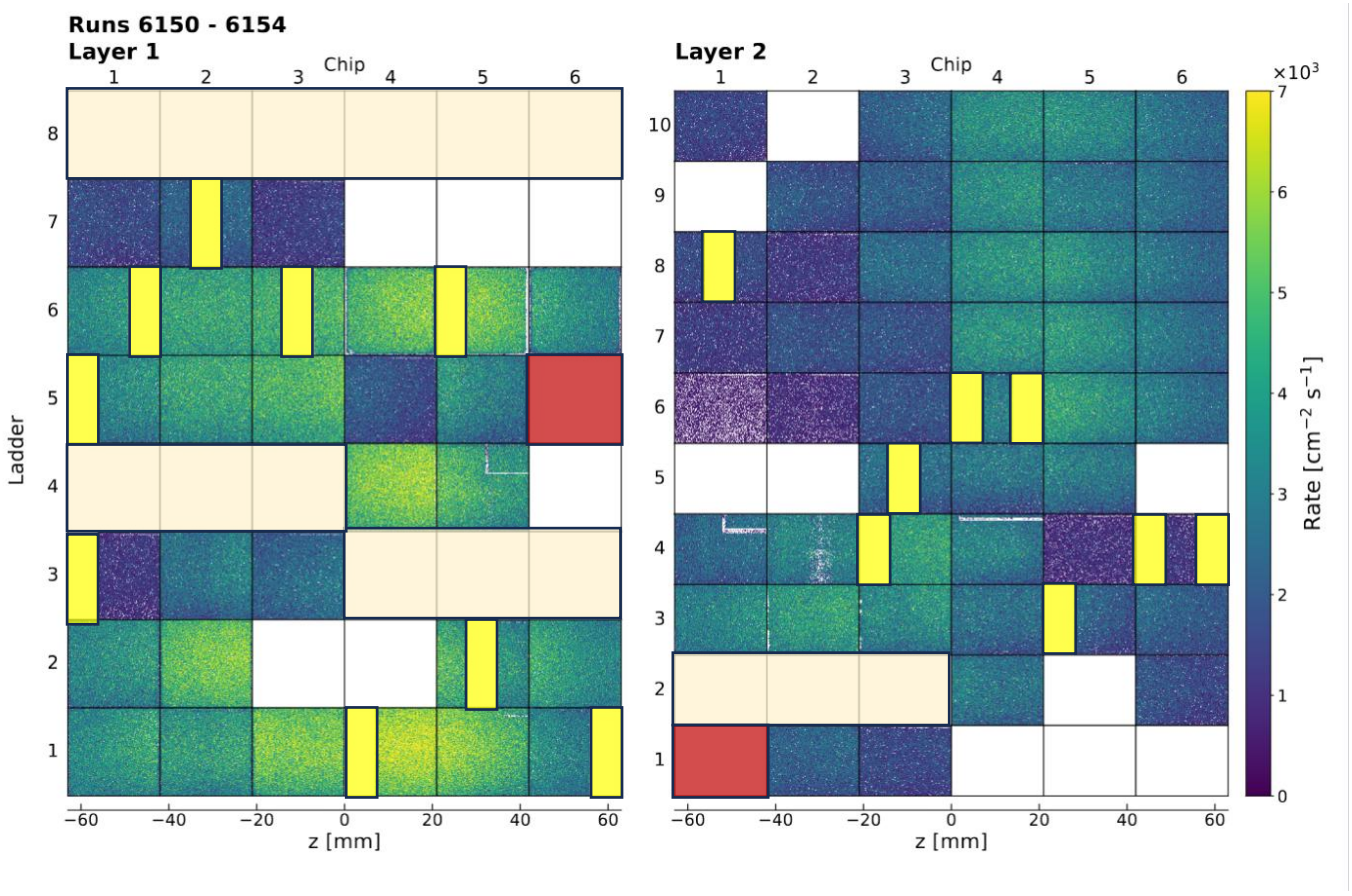

Successful Commissioning of the Mu3e Vertex Detector

- Blue regions:
  - Damaged while running or unstable
  - Overpower (HV or LV)
  - Bad LV connections
  - During mounting
  - Hot pixel
  - Unstable Links
- Still **ongoing** investigations

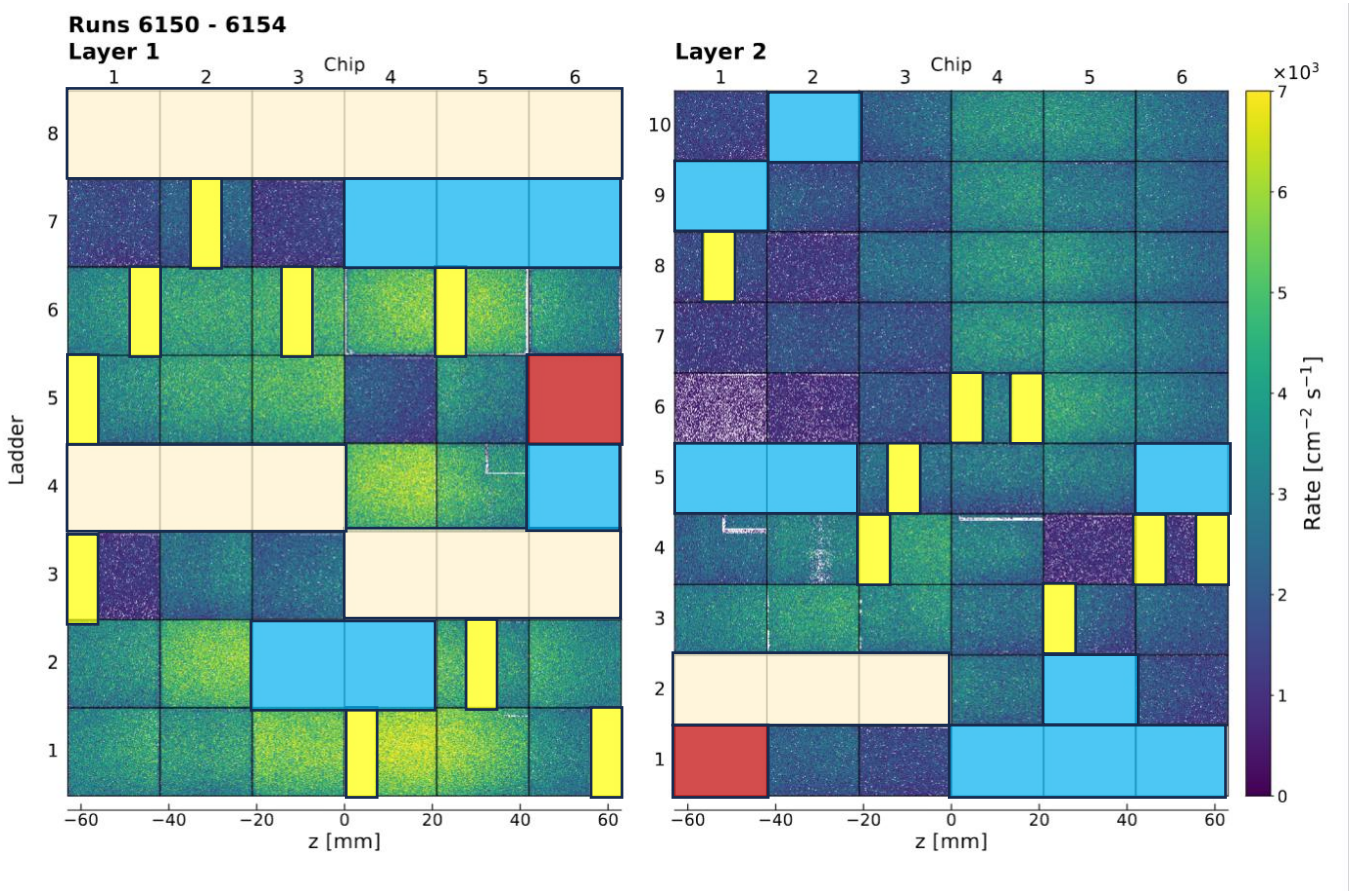

- Many **first** times and unknowns
  - Were the first to build such a detector
  - We **learned** a lot
- Improved ladder **tooling** and **flex designs** for the second version of the Mu3e Vertex Detector

Towards physics

- New **Vertex Detector V2**
  - 70µm sensors instead of 50µm (Time + Person power)
  - Improved tooling for ladder construction
  - New cooling system for ladder QC
  - Improved HDI design
  - Poster of Afiq Azraei Bin Rishinsa

  - Noise couples through the HV line
    - Additional resistor on the HV line solves it
    - More homogeneous tuning possible
  - New µTP cable production (better signal quality)

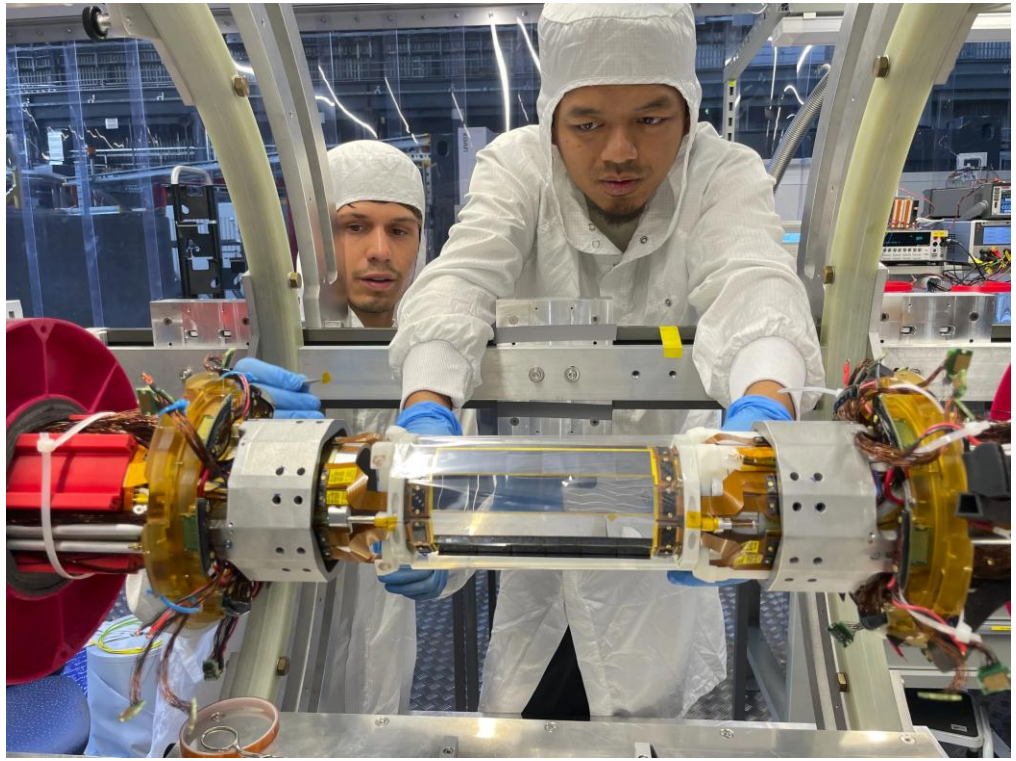

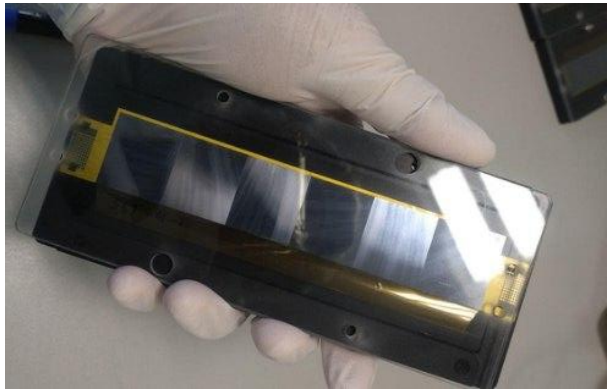

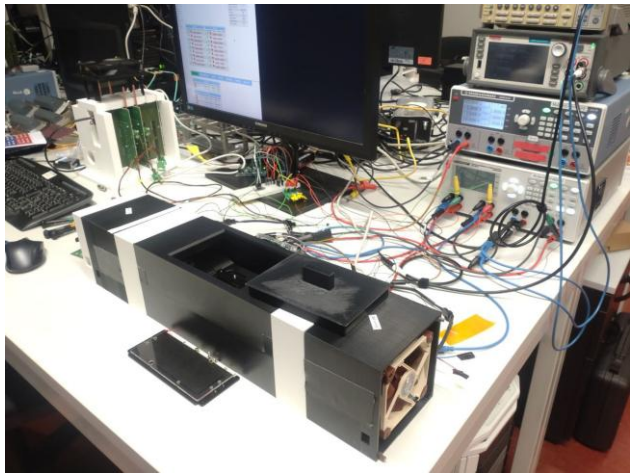

Towards physics

- **2026 Commissioning campaign**
  - 8 weeks Commissiong at PIE5
  - Vertex V2
  - Outer pixel Layer 3 (Talk by Ashley McDougall)
  - Full SciFi Detector + Full DS Tile station
  - Outer pixel commissioning + filter farm commissioning
- **Physics data taking** in 2027
  - Full central station + Recurl station?
  - Surpass the SINDRUM limit
  - < O(1e-13)
- HIPA Shutdown in 2028
- Full phase I data taking from 2029 onwards

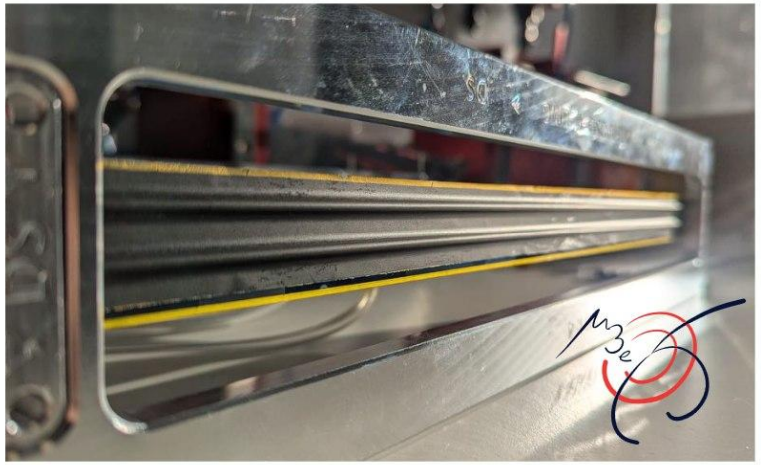

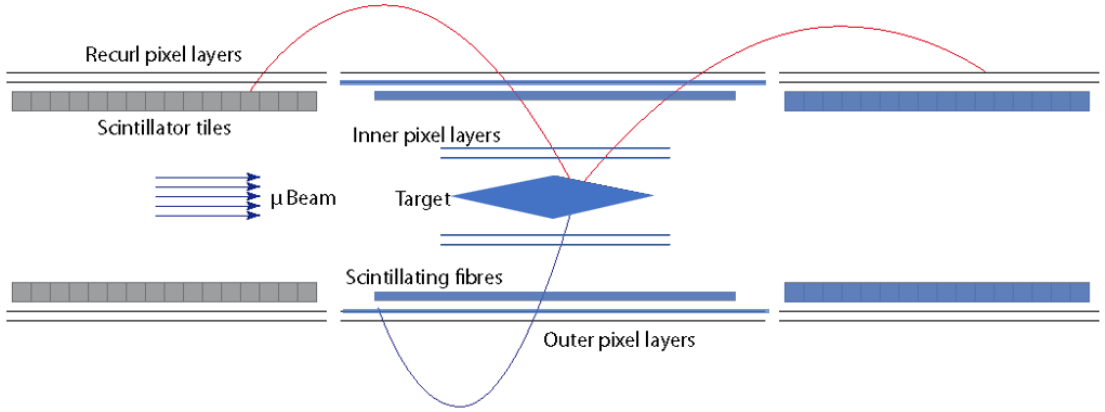

Detector Setup for 2026 Physics data taking campaign

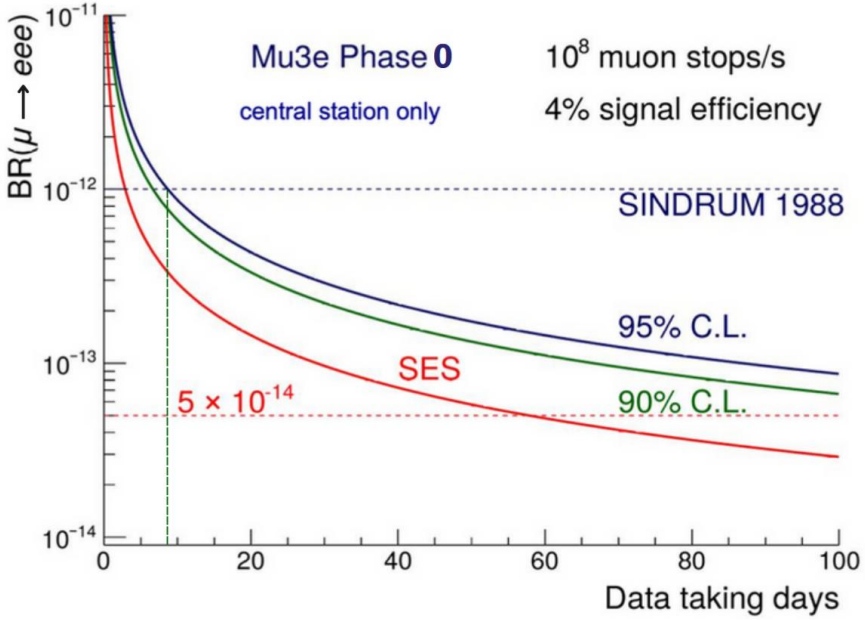

UNIVERSITY OF OXFORD

Universität Zürich[UZH]

KIRCHHOFF-INSTITUT FÜR PHYSIK

UNIVERSITÉ DE GENÈVE

ETH zürich

JG|U

UNIVERSITÄT HEIDELBERG
ZUKUNFT SEIT 1386

KIT
Karlsruher Institut für Technologie

University of BRISTOL

UNIVERSITY OF LIVERPOOL

UCL

Thank you

Literature / Links with further information

- MuPix: An HV–MAPS for the Mu3e Experiment
- TelePix2
- An ultra-light helium cooled pixel detector for the Mu3e experiment
- TelePix
- High-Voltage CMOS Active Pixel Sensor
- The Mu3e experiment: Toward the construction of an HV-MAPS vertex detector
- MuPix10: First Results from the Final Design
- The MuPix sensor for the Mu3e experiment

The golden muon channels

Muons are an excellent probe of cLFV

- **Sensitive**: New physics effects scale with the squared lepton mass m_l^2
- **Clean**: Relatively long lifetime and simple, well-understood decay channels, allowing for precise and background-free measurements

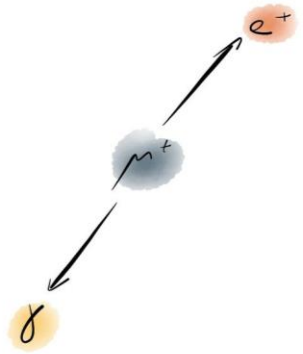

$\mu^+ \rightarrow e^+ \gamma$

MEG /MEG II (PSI 2025)

BR $(\mu^+ \rightarrow e^+ \gamma) < 1.5 \cdot 10^{-13}$



$\mu^- N \rightarrow e^- N$

SINDRUM II (PSI 2006)

BR $(\mu^- Au \rightarrow e^- Au) < 7 \cdot 10^{-13}$



$\mu^+ \rightarrow e^+ e^- e^+$

SINDRUM II (PSI 1988)

BR $(\mu^+ \rightarrow e^+ e^- e^+) < 1.0 \cdot 10^{-12}$

Mu3e signal and backgrounds

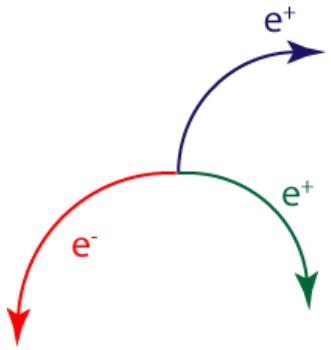

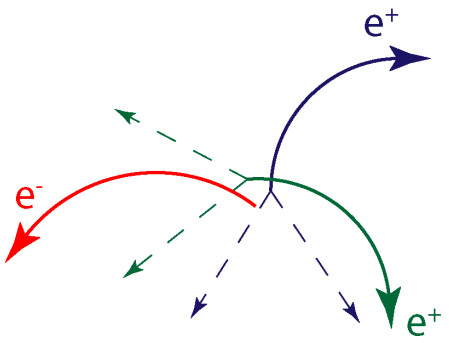

Two Michel decays + e^-

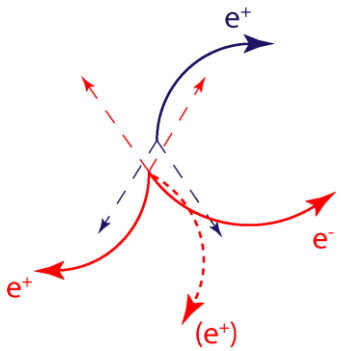

Michel decay + Internal Conversion

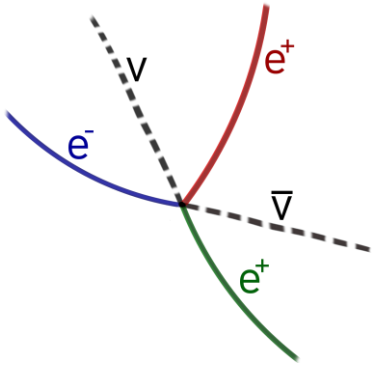

Signal

- Common Vertex
- Time coincidence
- $\Sigma\, P_e = (m_\mu\,, 0, 0, 0)$

→ Multiple Coulomb scattering effects dominates due to low momentum $e^{+/-}$

Accidental combinatorial background

- Accidental combinations of e^+ from $\mu^+ \to e^+\bar{\nu}\nu$ decays with an e^- or e^+e^- originating from
  - Bhabha scattering
  - photon conversion,
  - mis-reconstruction

→ Need very good timing and vertexing

Internal conversion

- Rare muon decay $BR(\mu^+ \to e^+e^-e^+\bar{\nu}\nu) = 3.4 \cdot 10^{-5}$
- The three electrons have a common vertex and are coincident
- Distinguishable only by the missing momentum carried by neutrinos

Need excellent momentum resolution

→ $\sigma_p < 1$ MeV/c