The global energy system: energy demand and supply, climate protection goals, and the potential of renewables

This assignment does not need to be submitted for grading.

Questions may be directed to Mashael Yazdanie (mashael.yazdanie@psi.ch).

## **Question 1**

Global primary energy demand is illustrated in Figure 1 for two climate change scenarios developed by the International Energy Agency (IEA). In IEA's 6-degree (6DS) and 2-degree (2DS) scenarios, the global average temperature increase until 2100 is limited to 6 degrees and 2 degrees, respectively.

Global population and GDP statistics are given in Table 1.

Figure 1: Global primary energy demand from different energy sources in 6-degree (6DS) and 2-degree (2DS) scenarios [1]

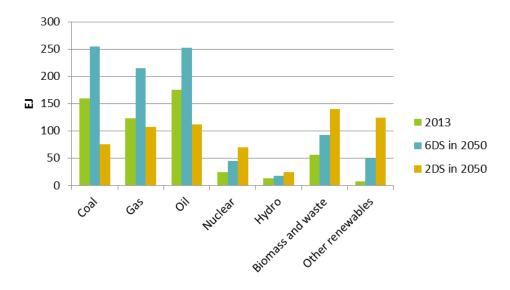


Table 1: World population and GDP statistics 2013 [2]

	World
Population (millions)	7118
Population 2050 (millions, projected)	9468
GDP (billion (=10 <sup>9</sup> ) 2005 USD)	86334
Real GDP growth projection (2012-2050) –	
CAAGR <sup>1</sup>	3.20%

<sup>1</sup> compound average annual growth rate

September 20, 2016

- a. Which energy source plays the most significant role in reducing global emissions according to Figure 1?
- b. Calculate the global primary energy demand in 2050 assuming that energy use is dependent on GDP and population growth only. What is the percent increase in GDP per capita in 2050 compared to 2012?
- c. Estimate the CO<sub>2</sub> emissions for each scenario using the emission factors for fossil fuels in Table 2. How much lower are 2DS emissions compared to the 6DS scenario? Hint: 1 kg C-equivalent = 44/12 kg CO<sub>2</sub>-equivalent.

Fuel Emissions (kg CE/GJ)

Coal 26.8

Natural gas 15.5

Oil 19.8

Table 2: Fossil fuel emission factors

- d. Calculate the emission intensity factor (kt CO<sub>2</sub>/PJ) in each scenario.
- e. Consider a scenario (XDS) in which the emission intensity factor is 40 kt CO<sub>2</sub>/PJ and the total primary energy demand is two-thirds of that in the 6DS scenario in 2050. Assume also that the share of energy from coal/oil/gas in the total XDS fossil fuel mix can be approximated as the average of the 6DS and 2DS fossil fuel share of coal/oil/gas in the respective scenarios. What is the total supply from carbon-free energy sources in 2050 in this scenario?
- f. What is the Kaya identity? Define the relationship and its function.

## Question 2

In this exercise, you will analyze the energy supply to the industrial sector in Switzerland. The energy supply by industrial usage category and energy carrier is illustrated in Table 3 below in 2012.

Table 3: Energy supply (PJ) to the industrial sector in Switzerland 2012, based on [2], [3]

Industrial Energy Supply 2012 (PJ)									
	Space Heating	Water Heating	Process Heat	Lighting	Cooling	I&C	Other Process	Total	
Coal	0.0	0.0	5.1	0.0	0.0	0.0	0.0	5.1	
Natural Gas	6.5	1.4	27.4	0.0	0.0	0.0	0.4	35.6	
Fuel Oil	11.0	1.1	15.0	0.0	0.0	0.0	0.7	27.8	
Wastes	0.0	0.0	10.3	0.0	0.0	0.0	0.0	10.3	
Wood	0.0	0.0	10.1	0.0	0.0	0.0	0.0	10.1	
Biogas	0.0	0.0	0.4	0.0	0.0	0.0	0.0	0.4	
Solar	0.0	0.0	0.0	0.0	0.0	0.0	0.1	0.1	
Geothermal	0.4	0.1	0.0	0.0	0.0	0.0	0.4	0.9	
Electricity	0.3	0.0	22.2	6.2	1.1	0.8	37.9	68.5	
Heat	5.2	1.4	0.0	0.0	0.0	0.0	0.0	6.5	
Total	23.3	3.9	91.5	6.2	1.1	0.8	39.9	165.3	

- a. What is the most energy-intensive application in industry? Calculate its share as a percentage of the total industrial sector energy demand and the total heat energy demand (i.e., space, water and process heat).
- b. Suppose that Switzerland expects a compound average annual growth rate (CAAGR) of 0.5% in the industrial sector in future years [4]. What is the total industrial primary energy demand in 2050, and what is the relative increase in total industrial demand compared to 2012?
- c. In the national New Energy Policy (NEP) energy scenario for Switzerland, total electricity demand is targeted to be 63.6 TWh in 2010, 65.3 TWh in 2015, and 57.4 TWh in 2050 [5]. Determine the industrial electricity demand in 2050 assuming the same relative reduction as in the NEP scenario compared to the electricity demand in 2050 if assuming the annual growth rate in (b). What percentage would efficiency measures need to reduce electricity demand by in order to meet the NEP target in 2050? Assume that electricity demand approximately decreases linearly between 2010 and 2015 in the NEP scenario.
- d. Using the emission factors in Table 2, calculate the total emissions due to coal, natural gas and oil from the industrial sector. If the industrial sector accounts for approximately 9% of national emissions, what are the total Swiss emissions in 2012?

Prof. Alexander Wokaun

## **Question 3**

- a. Switzerland has a policy to phase-out nuclear energy by 2035, representing approximately 25.6 TWh/year in 2010 [5]. According to a national scenario, Switzerland has 11 TWh/year of unused PV potential [5]. Suppose that 60% of this potential is harnessed to replace nuclear energy, and the remainder is to be met with gas plants. How many 500 MW gas plants would be required if the annual average capacity factor for each plant is 85%? (Note: the capacity factor is defined as the ratio of a plant's actual output over a period of time, to its potential output if it were to operate continuously at full nameplate capacity over the same period.)
- b. What is the minimum PV panel efficiency required in order for the full PV plant potential to occupy less than 27000 hectares of land, assuming an average daily solar radiation of 2.1 kWh/m² and assuming that 30% of a PV plant's area is occupied by the panels?
- c. What is the input solar energy required to achieve the full potential assuming the efficiency in (b)?
- d. What would the total installed PV capacity be assuming a capacity factor of 9%?

## References

- [1] Energy Technology Perspectives 2016 <a href="https://www.iea.org/media/etp/etp2016/ETP2016\_Webinar\_ALL.pdf">https://www.iea.org/media/etp/etp2016/ETP2016\_Webinar\_ALL.pdf</a>
- [2] International Energy Agency (IEA), Statistics http://www.iea.org/statistics/statisticssearch
- [3] Swiss Federal Office of Energy (BFE) Energy Statistics http://www.bfe.admin.ch/energie/00588/00589/00644/?lang=en&msg-id=39869
- [4] US Energy Information Agency http://www.eia.gov/forecasts/ieo/industrial.cfm
- [5] Densing, M., Hirschberg, S., Turton, H. (2014). Review of Swiss Electricity Scenarios 2050, PSI-Report 14-05 https://www.psi.ch/eem/PublicationsTabelle/PSI-Bericht 14-05.pdf